

BCM94343WWCD1_1: BCM4343W WLBGA + STM32F411


Preliminary schematic, subject to changes

Page 1 - Revision and Notes



Page 2 - BCM4343W WLBGA Section

Page 3 - STM32F411 Section

BOM ITEMS	
PCB	<div>PCB NUMBER: 200-129295-0010</div> <div>PCB NAME: BCM94343WWCD1_1</div>
	ASSEMBLY INSTRUCTIONS
SHIELD	
	<div>SIP Shield: 210-128955-0010</div> <div>ZH1 210-128955-0010</div>


	Broadcom Corporation 5300 California Avenue Irvine, CA 92617 Phone: (949) 926-5000			
	BCM94343WWCD1_1			
	Size		DWG NO	Rev
	Custom		824-129295-0010	04
Monday, August 10, 2015	Scale	Deval Dave	Sheet	1 of 3

WLAN: BCM4343W WLBGA

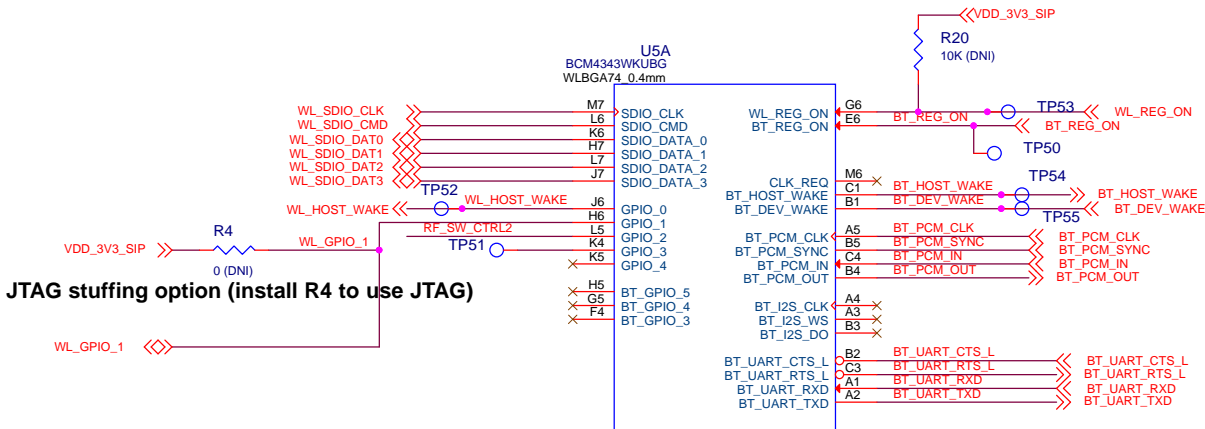
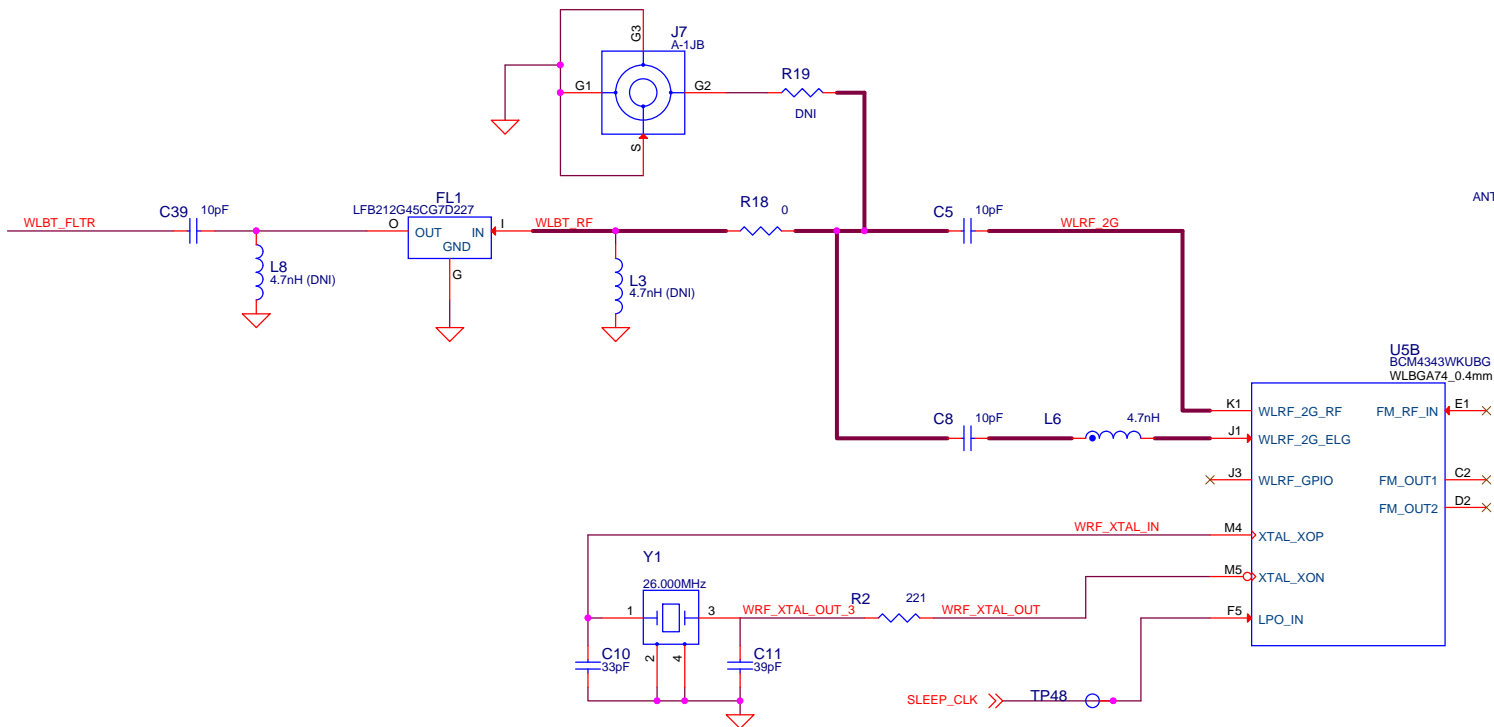



JTAG stuffing option (install R4 to use JTAG)





SDIO INTERFACE




RF Shield Clip Landing Pads

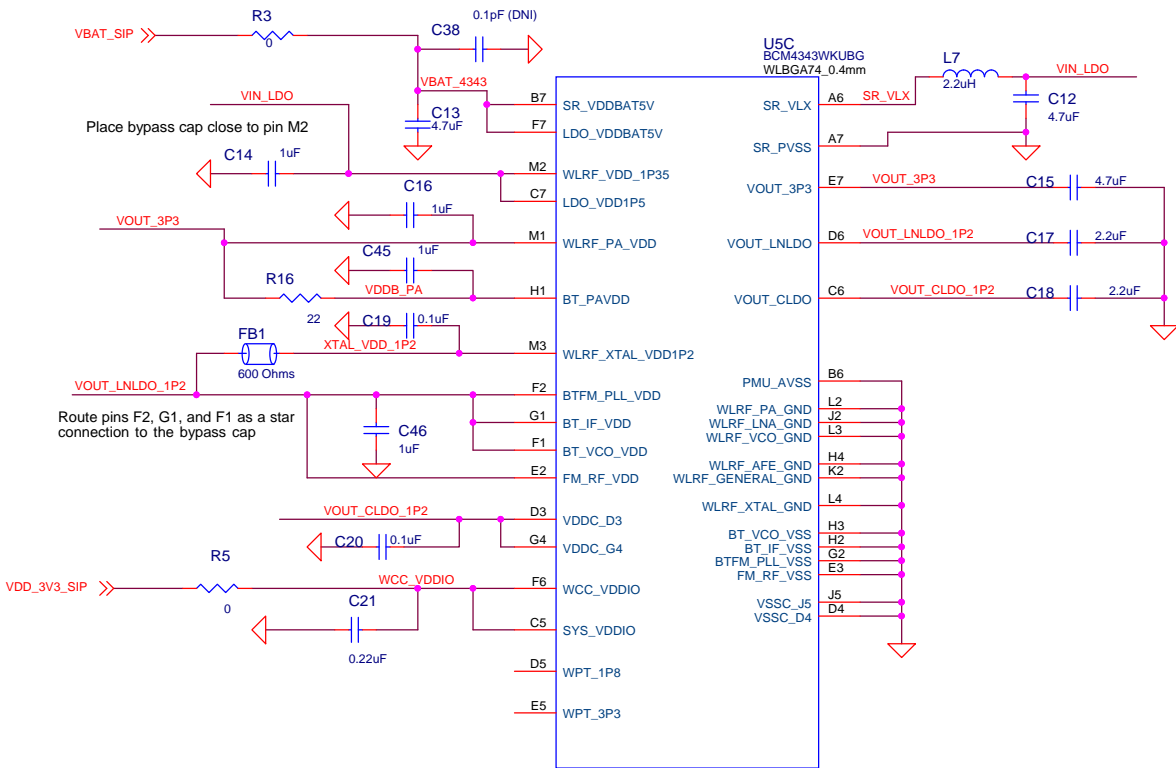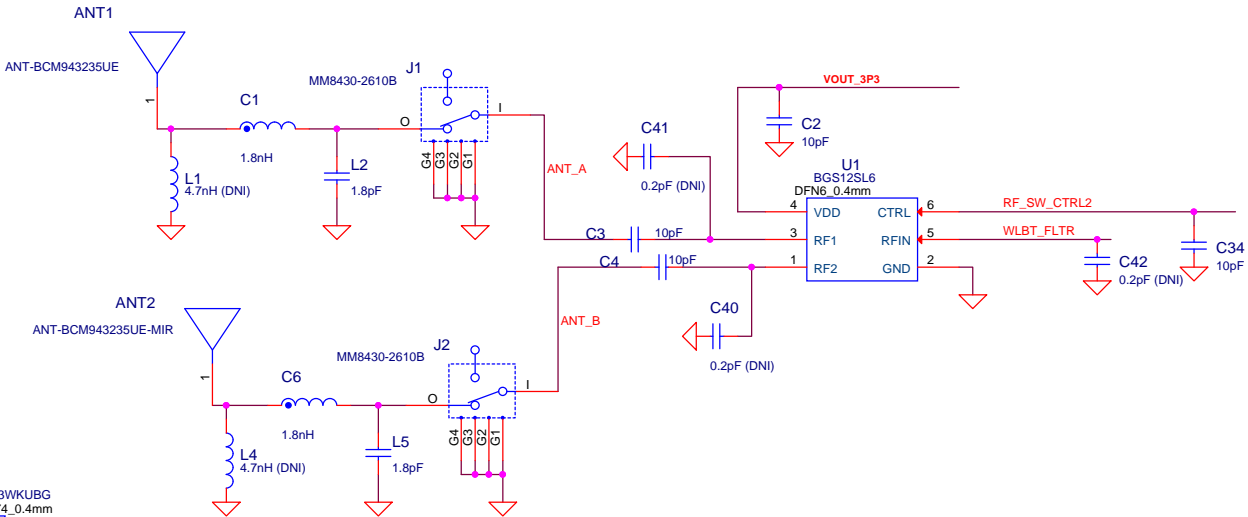


	Broadcom Corporation		
	5300 California Avenue Irvine, CA 92617 Phone: (949) 926-5000		
BCM94343WWCD1_1		Rev 04	
Size		DWG NO	
Custom		824-129295-0010	
Scale		Sheet	
Monday, August 10, 2015		2 of 3	

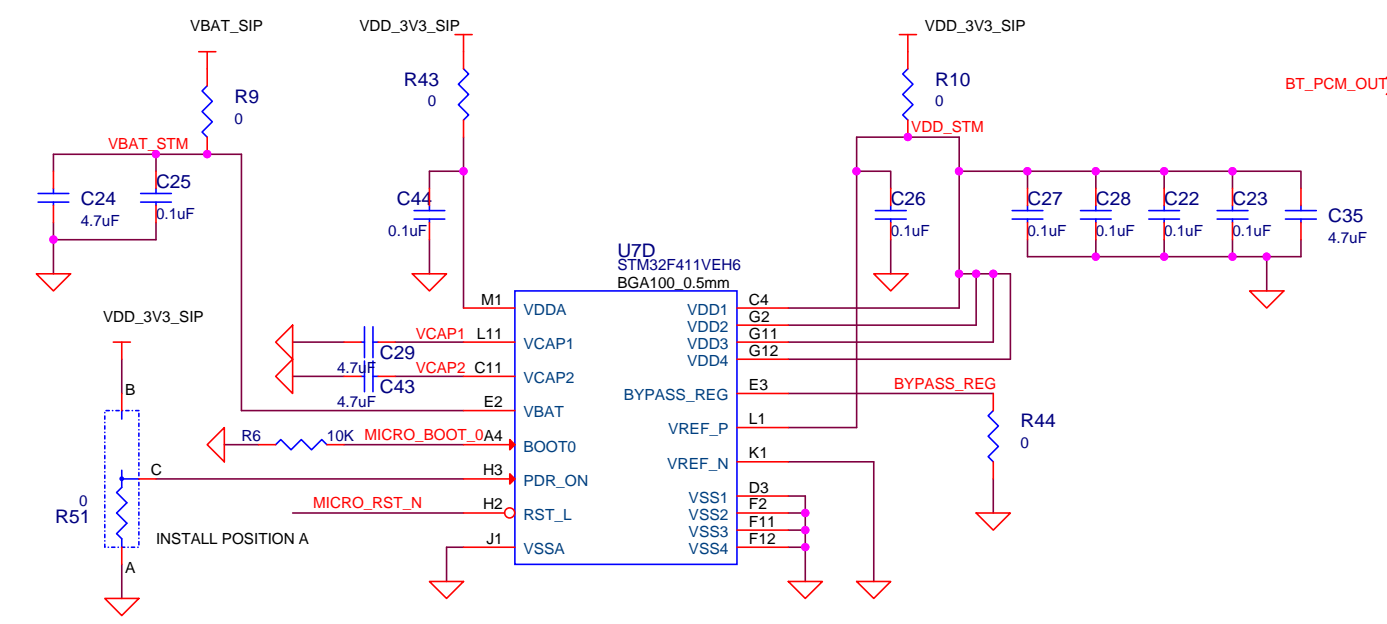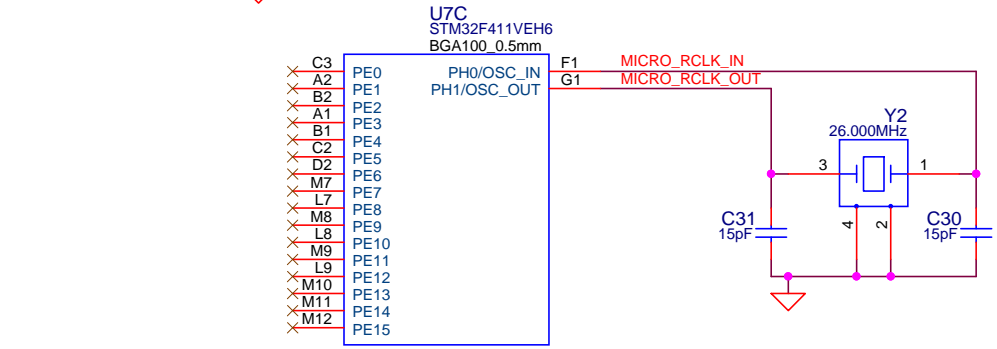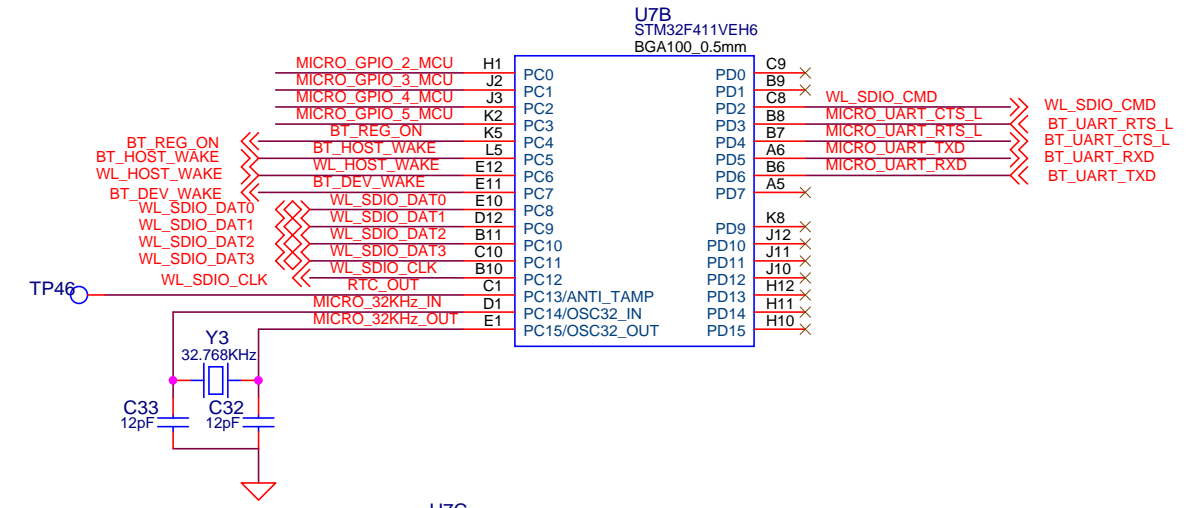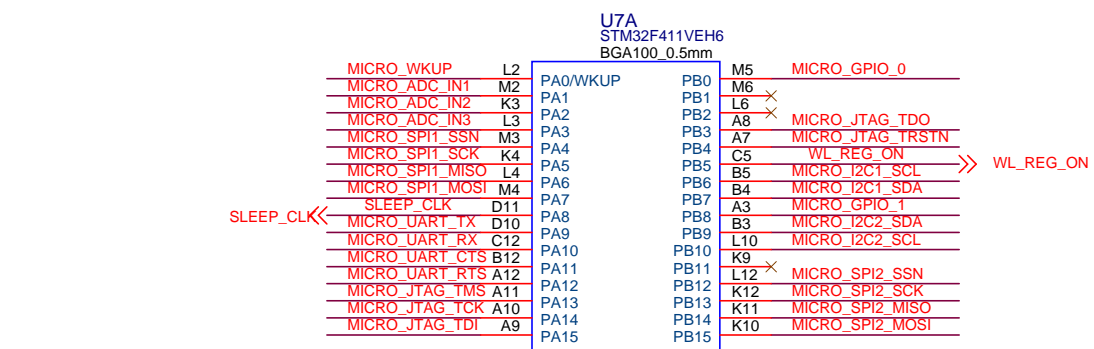

To use SPI2 between BCM4343W and STM32F411:
Install R11, R12, R13, R14 and R15.
(R15 is used to select SPI mode for BCM4343W)

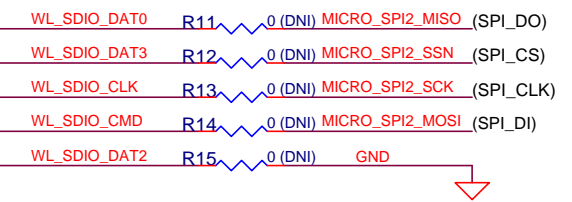


To use WLAN JTAG, Install R4



To use GPIO Signals to STM32F411, Install Position AC.


To use BT PCM Signals directly to BCM43438, Install Position BC (Default).

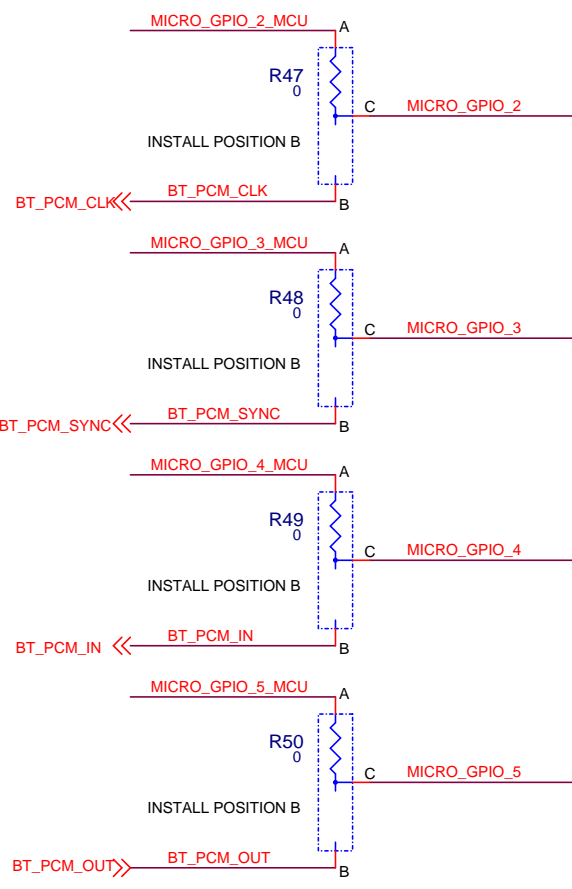

SDIO / SPI Interface Options:

SDIO	STM32F411 Pin Number	STM32F411 Port/Pin		BCM4343W Pin Number	Function
	B10	PC12	<--->	M7	SDIO_CLK
	C8	PD2	<--->	L6	SDIO_CMD
	E10	PC8	<--->	K6	SDIO_DATA_0
	D12	PC9	<--->	H7	SDIO_DATA_1
	B11	PC10	<--->	L7	SDIO_DATA_2
	C10	PC11	<--->	J7	SDIO_DATA_3
SPI	STM32F411 Pin Number	STM32F411 Port/Pin		BCM4343W Pin Number	Function
	K12	PB13	<--->	M7	SPI_CLK
	K10	PB15	<--->	L6	SPI_MOSI
	K11	PB14	<--->	K6	SPI_MISO
	C10	PC11	<--->	J7	SPI_CS
	D12	PC9	<--->	H7	SPI_IRQ

Note: Only one set of communication lines are required to be connected between the microcontroller and wlan device (either SDIO or SPI). Please select one set based on the table above. It is NOT necessary to connect both SPI and SDIO.

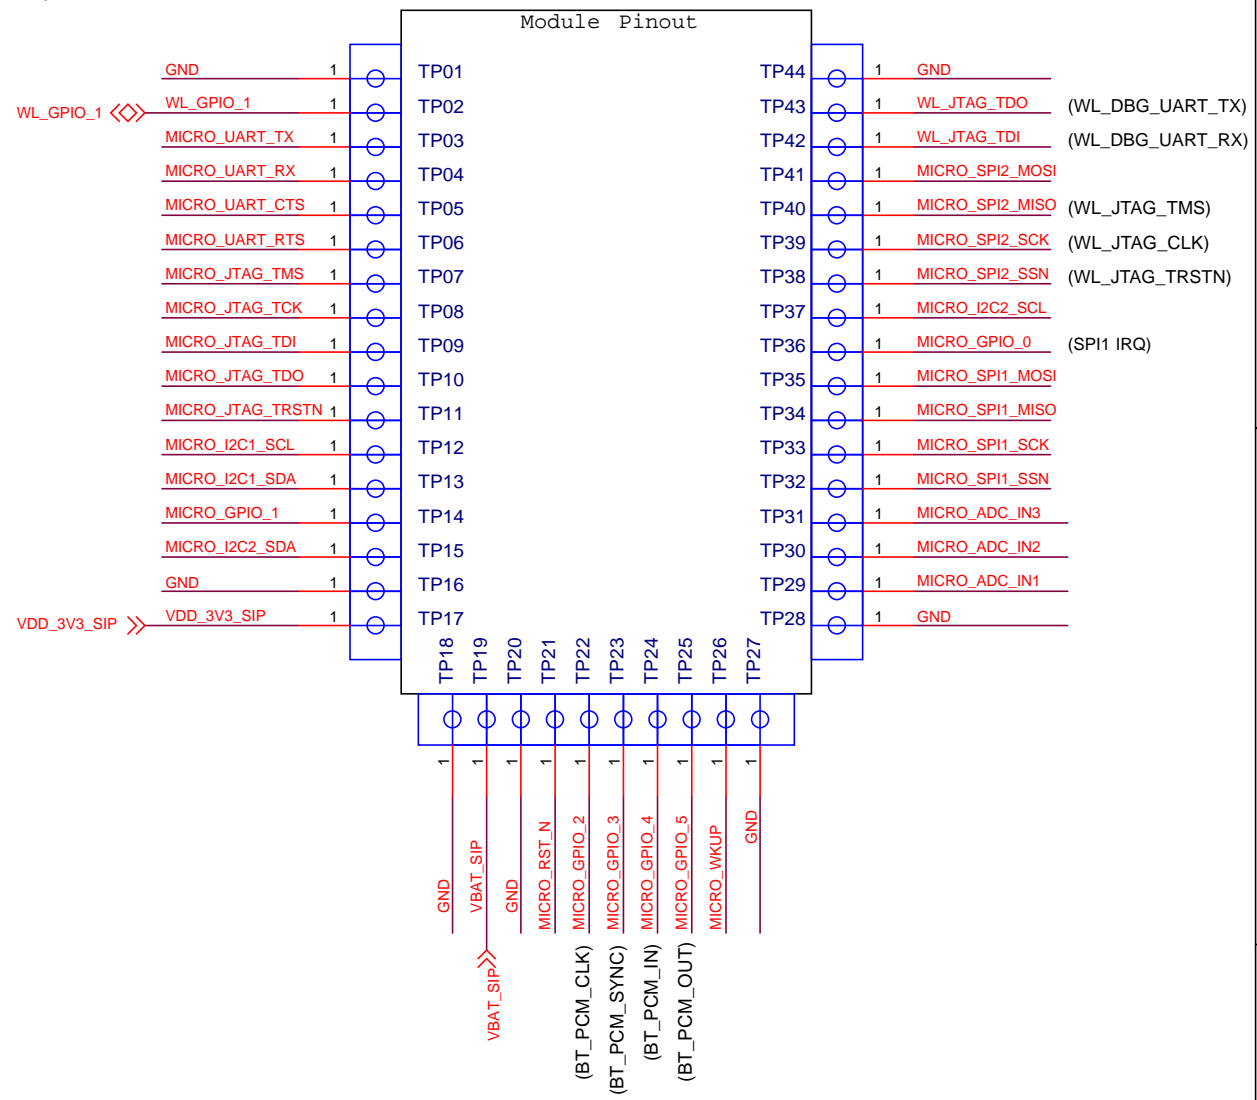



Broadcom Corporation

5300 California Avenue
Irvine, CA 92617
Phone: (949) 926-5000

BCM94343WWCD1_1

Size	DWG NO	Rev
Custom	824-129295-0010	04
Scale	Deval Dave	Sheet 3 of 3

Monday, August 10, 2015