


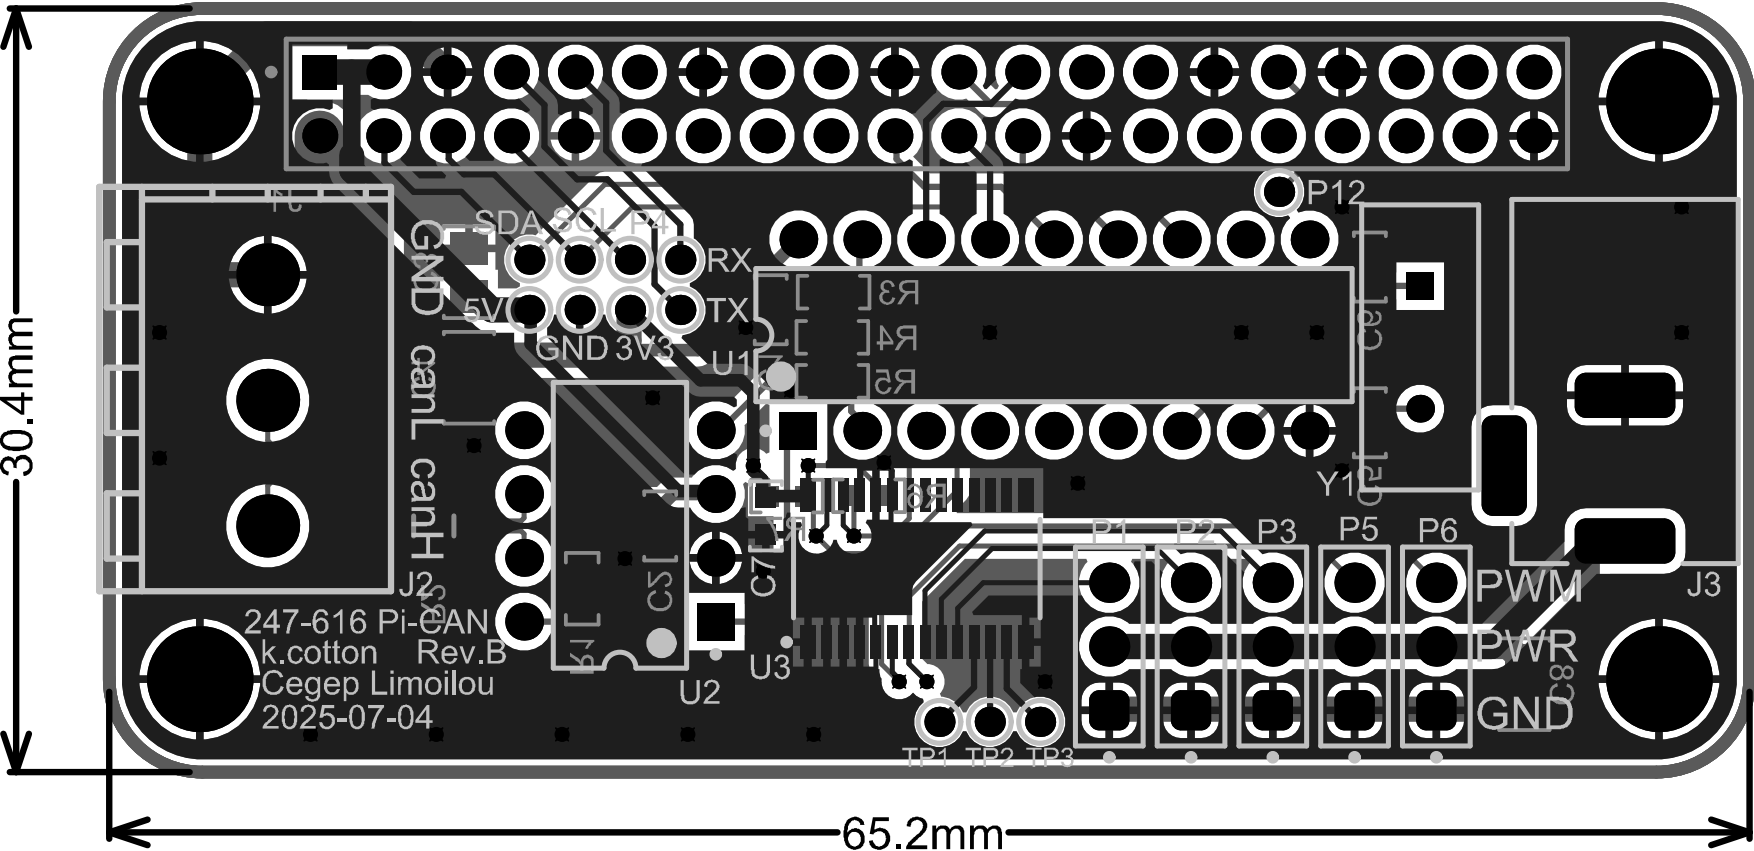

Layer	Name	Thickness	Gerber
	Top Overlay		GTO
	Top Solder	0.025mm	GTS
	Top Surface Finish	0.020mm	
1	Top Layer	0.035mm	GTL
	Dielectric 1	1.499mm	
2	Bottom Layer	0.035mm	GBL
	Bottom Surface Finish	0.020mm	
	Bottom Solder	0.025mm	GBS
	Bottom Overlay		GBO

Total board thickness: 1.659mm

Symbol	Count	Hole Size	Plated	Hole Type	Drill Layer Pair	Via/Pad	Pad Shape	Hole Length
✖	29	0.300mm (11.81mil)	PTH	Round	Top Layer - Bottom Layer	Via	Rounded	-
▽	11	0.600mm (23.62mil)	PTH	Round	Top Layer - Bottom Layer	Pad	(Mixed)	-
◇	3	0.610mm (24.02mil)	PTH	Round	Top Layer - Bottom Layer	Pad	Rounded	-
▽	3	0.800mm (31.50mil)	PTH	Slot	Top Layer - Bottom Layer	Pad	Rounded Rectangle	3.000mm (118.11mil)
□	66	0.900mm (35.43mil)	PTH	Round	Top Layer - Bottom Layer	Pad	(Mixed)	-
✖	15	1.100mm (43.31mil)	PTH	Round	Top Layer - Bottom Layer	Pad	(Mixed)	-
○	3	1.300mm (51.18mil)	PTH	Round	Top Layer - Bottom Layer	Pad	Rounded	-
✳	4	3.000mm (118.11mil)	PTH	Round	Top Layer - Bottom Layer	Pad	Rounded	-
	134 Total							

Slot definitions : Routed Path Length = Calculated from tool start centre position to tool end centre position.
Hole Length = Routed Path Length + Tool Size = Slot length as defined in the PCB layout