HRPG Series
Miniature Panel Mount Optical Encoders

Data Sheet

Avago
TECHNOLOGIES

Description

The HRPG series is a family of miniature panel mount optical encoders, also known as Rotary Pulse Generators (RPG) and digital potentiometers. The HRPG is designed to be mounted on a front panel and used as a rotary, data-entry device. The HRPG is very flexible for numerous applications due to the many configuration options available. These options include detents or smooth, multiple terminations, versatile mounting capabilities, and different shaft configurations.

The HRPG uses optical reflective technology providing accuracy and reliability to the encoder. An LED emits a beam of light onto the specular codewheel surface. When the light strikes the surface, it projects the image of the codewheel back on the photodetector, causing the output to change. The entire detector circuit is on one IC, thus the part is less sensitive to temperature and other environmental variations.

Applications

Typical applications for the Rotary Pulse Generator include front panel instruments, audio/visual boards, and other devices requiring digital output from a turning knob.

Note: Avago Technologies encoders are not recommended for use in safety critical applications. Eg. ABS braking systems, power steering, life support systems and critical care medical equipment. Please contact sales representative if more clarification is needed.

Features

- Miniature size
- Smooth turning and detented options
- Multiple mounting bracket options
- Uses optical reflective technology
- Quadrature digital output
- Small footprint for versatile mounting
- TTL compatible
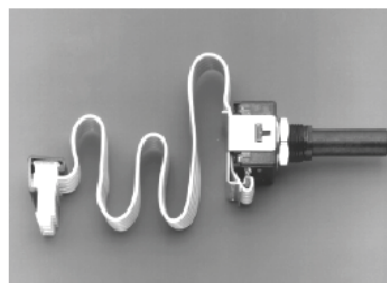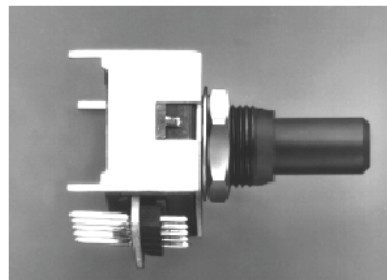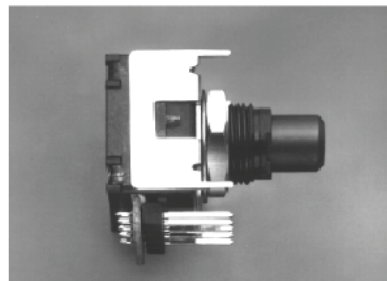
Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units	Notes
Storage Temperature	T_S	-40	+85	°C	
Operating Temperature	T_A	0	+70	°C	
Vibration			20	g	20 Hz to 2 kHz
Supply Voltage	V_{CC}	-0.5	7	V	
Output Voltage	V_O	-0.5	V_{CC}	V	
Output Current Per Channel	I_O	-1	5	mA	
Shaft Load – Axial			4.0	N	10^6 Revolutions
Shaft Load – Radial			0.1	Nm	10^6 Revolutions
Revolution Life		10^6		Rev	At Maximum Loads

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units	Notes
Temperature	T	0	+70	°C	Noncondensing Atmosphere
Supply Voltage	V_{CC}	4.5	5.5	V	Ripple < 100 mV$_{P-P}$
Rotation Speed – Detented			200	RPM	
– Smooth			300	RPM	

Electrical Characteristics

Over Recommended Operating Range

Parameter	Symbol	Min.	Max.	Units	Notes
Supply Current	I_{CC}		40	mA	
High Level Output Voltage	V_{OH}	2.4		V	I_{OH} = -40 µA Max.
Low Level Output Voltage	V_{OL}		0.4	V	I_{OL} = 3.2 mA

Output Waveforms
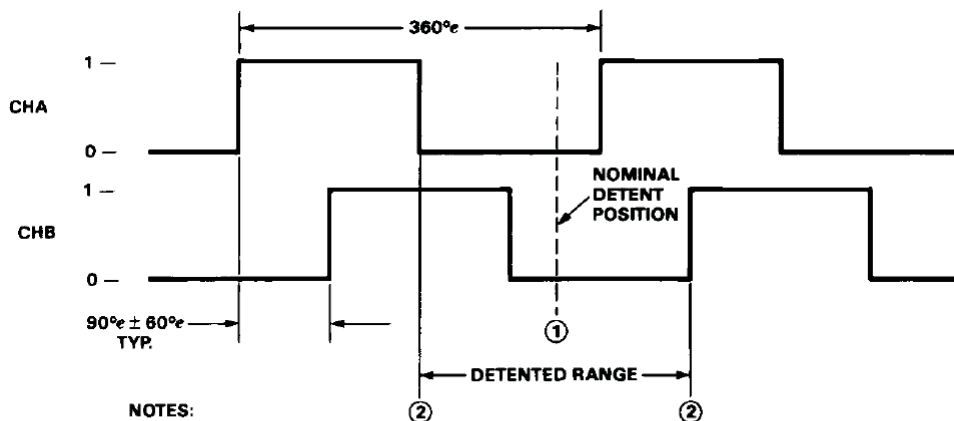
NOTES:

$$360°e = \frac{360° \text{ MECH.}}{\text{CPR}}$$

CHANNEL A LEADS CHANNEL B FOR CLOCKWISE ROTATION
CHANNEL B LEADS CHANNEL A FOR COUNTERCLOCKWISE ROTATION
1. FOR HRPG-ADXX #XXX THE NOMINAL DETENT POSITION IS CENTERED AROUND LOW-LOW STATE (CHA = 0, CHB = 0).
2. DETENT POSITION WILL LIE WITHIN THESE BOUNDARIES, NEVER IN HIGH-HIGH STATE (CHA = 1, CHB = 1).
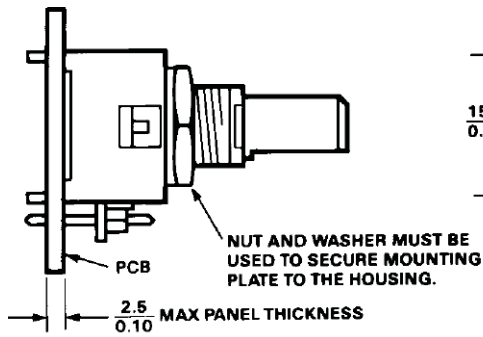
Mechanical Configurations
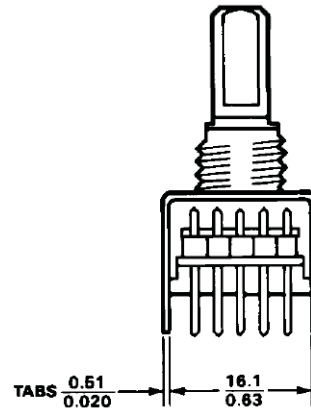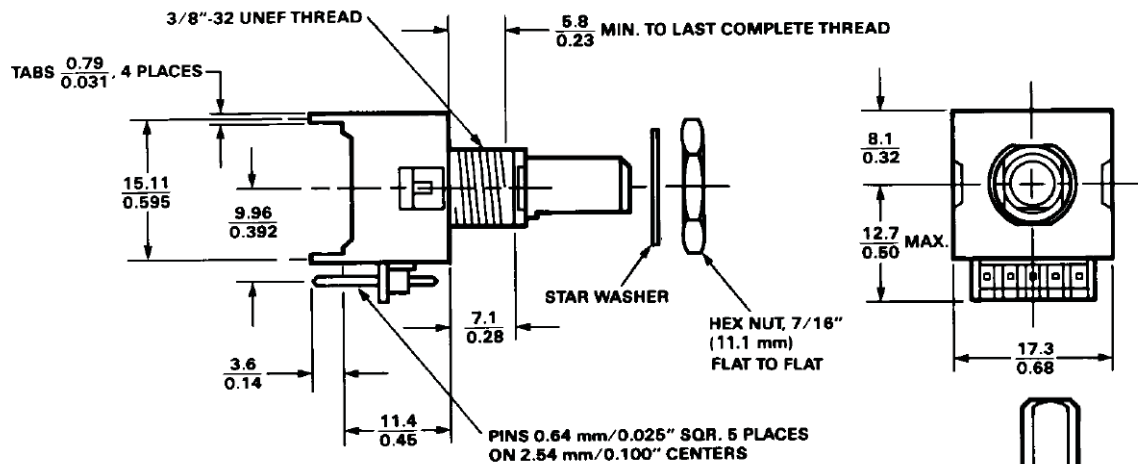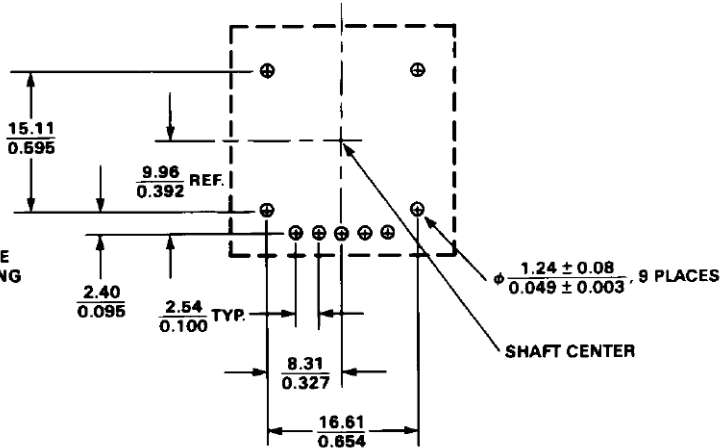
Termination Options
Option R – Pins Rear with Bracket
HRPG-AXXX#XXR

SUGGESTED CONFIGURATION

PCB MOUNTING DIMENSIONS

$\frac{15.11}{0.595}$

$\frac{9.96}{0.392}$ REF.

$\frac{2.40}{0.095}$

$\frac{2.54}{0.100}$ TYP.

$\frac{8.31}{0.327}$

$\frac{16.61}{0.654}$

NUT AND WASHER MUST BE
USED TO SECURE MOUNTING
PLATE TO THE HOUSING.

PCB

$\frac{2.5}{0.10}$ MAX PANEL THICKNESS

$\phi \frac{1.24 \pm 0.08}{0.049 \pm 0.003}$, 9 PLACES

SHAFT CENTER

3/8"-32 UNEF THREAD

$\frac{5.8}{0.23}$ MIN. TO LAST COMPLETE THREAD

TABS $\frac{0.79}{0.031}$, 4 PLACES

$\frac{15.11}{0.595}$

$\frac{9.96}{0.392}$

$\frac{7.1}{0.28}$

STAR WASHER

HEX NUT, 7/16"
(11.1 mm)
FLAT TO FLAT

$\frac{3.6}{0.14}$

$\frac{11.4}{0.45}$

PINS 0.64 mm/0.025" SQR. 5 PLACES
ON 2.54 mm/0.100" CENTERS

$\frac{8.1}{0.32}$

$\frac{12.7}{0.50}$ MAX.

$\frac{17.3}{0.68}$

NOTES:
DIMENSIONS ARE: $\frac{mm}{INCHES}$

TOLERANCES ARE: $\frac{X \pm 0.25 \text{ mm}}{.XX \pm 0.01"}$

$\frac{.XX \pm 0.13 \text{ mm}}{.XXX \pm 0.005"}$

SHIELD IS FOR HOUSING ESD PATH ONLY
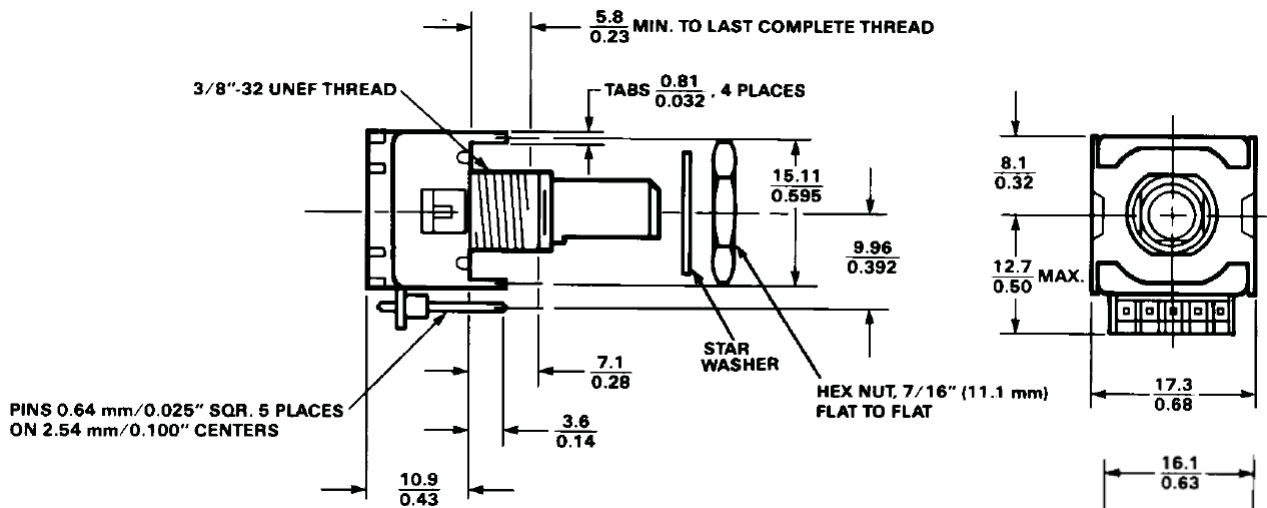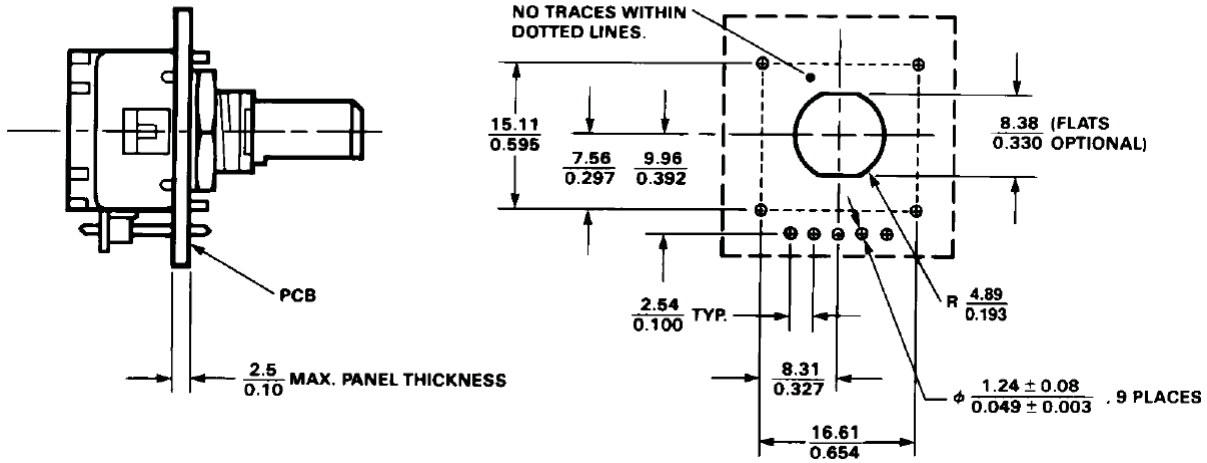
TABS $\frac{0.51}{0.020}$

$\frac{16.1}{0.63}$

1. GROUND (DOT ON BOTTOM)
2. CHANNEL B
3. V$_{cc}$ (+5 VOLTS)
4. CHANNEL A
5. SHIELD (HOUSING GROUND)

3

Option F – Pins Front with Bracket

HRPG-AXXX#XXF
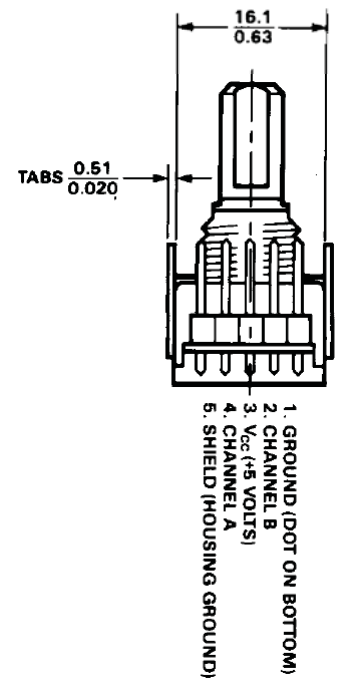
SUGGESTED CONFIGURATION

PCB MOUNTING DIMENSIONS

NO TRACES WITHIN DOTTED LINES.

$\frac{15.11}{0.595}$

$\frac{7.56}{0.297}$ $\frac{9.96}{0.392}$

$\frac{8.38}{0.330}$ (FLATS OPTIONAL)

PCB

$\frac{2.54}{0.100}$ TYP.

R $\frac{4.89}{0.193}$

$\frac{2.5}{0.10}$ MAX. PANEL THICKNESS

$\frac{8.31}{0.327}$

$\phi \frac{1.24 \pm 0.08}{0.049 \pm 0.003}$. 9 PLACES

$\frac{16.61}{0.654}$

$\frac{5.8}{0.23}$ MIN. TO LAST COMPLETE THREAD

3/8"-32 UNEF THREAD

TABS $\frac{0.81}{0.032}$. 4 PLACES

$\frac{8.1}{0.32}$

$\frac{15.11}{0.595}$

$\frac{9.96}{0.392}$

$\frac{12.7}{0.50}$ MAX.

STAR WASHER

HEX NUT, 7/16" (11.1 mm) FLAT TO FLAT

$\frac{7.1}{0.28}$

PINS 0.64 mm/0.025" SQR. 5 PLACES ON 2.54 mm/0.100" CENTERS

$\frac{3.6}{0.14}$

$\frac{17.3}{0.68}$

$\frac{10.9}{0.43}$

$\frac{16.1}{0.63}$

TABS $\frac{0.51}{0.020}$

NOTES:

DIMENSIONS ARE: $\frac{mm}{INCHES}$

TOLERANCES ARE: $\frac{X \pm 0.25 \text{ mm}}{.XX \pm 0.01"}$

$\frac{.XX \pm 0.13 \text{ mm}}{.XXX \pm 0.005"}$
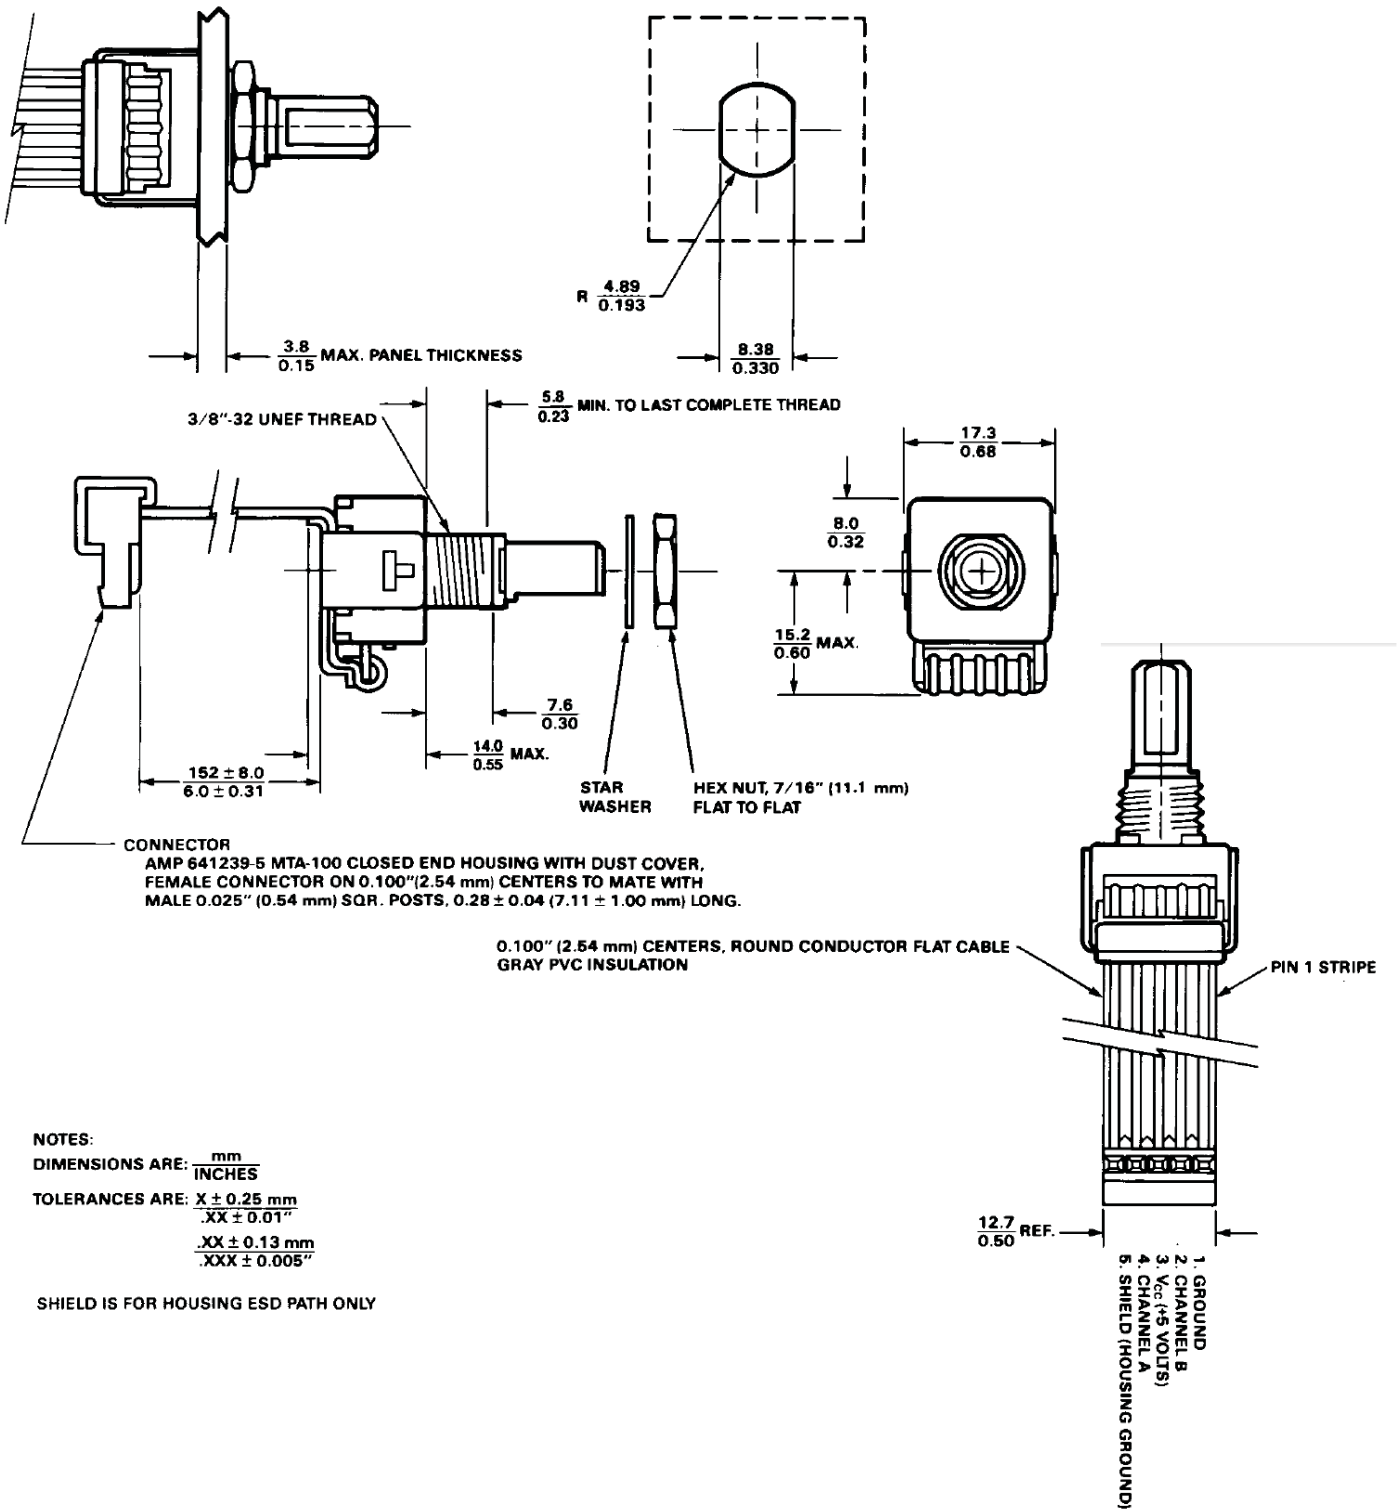
SHIELD IS FOR HOUSING ESD PATH ONLY

1. GROUND (DOT ON BOTTOM)
2. CHANNEL B
3. V_{cc} (+5 VOLTS)
4. CHANNEL A
5. SHIELD (HOUSING GROUND)

4

Option C – Cable Connector with Strain Relief

HRPG-AXXX#XXC

SUGGESTED CONFIGURATION

PANEL HOLE DIMENSIONS

$R \frac{4.89}{0.193}$

$\frac{8.38}{0.330}$

$\frac{3.8}{0.15}$ MAX. PANEL THICKNESS

$\frac{5.8}{0.23}$ MIN. TO LAST COMPLETE THREAD

3/8"-32 UNEF THREAD

$\frac{17.3}{0.68}$

$\frac{8.0}{0.32}$

$\frac{15.2}{0.60}$ MAX.

$\frac{7.6}{0.30}$

$\frac{14.0}{0.55}$ MAX.

$\frac{152 \pm 8.0}{6.0 \pm 0.31}$

STAR WASHER

HEX NUT, 7/16" (11.1 mm) FLAT TO FLAT

CONNECTOR
AMP 641239-5 MTA-100 CLOSED END HOUSING WITH DUST COVER,
FEMALE CONNECTOR ON 0.100"(2.54 mm) CENTERS TO MATE WITH
MALE 0.025" (0.54 mm) SQR. POSTS, 0.28 ± 0.04 (7.11 ± 1.00 mm) LONG.

0.100" (2.54 mm) CENTERS, ROUND CONDUCTOR FLAT CABLE
GRAY PVC INSULATION

PIN 1 STRIPE

$\frac{12.7}{0.50}$ REF.

1. GROUND
2. CHANNEL B
3. V$_{cc}$ (+5 VOLTS)
4. CHANNEL A
5. SHIELD (HOUSING GROUND)

NOTES:
DIMENSIONS ARE: $\frac{mm}{INCHES}$

TOLERANCES ARE: $\frac{X \pm 0.25\ mm}{.XX \pm 0.01"}$

$\frac{.XX \pm 0.13\ mm}{.XXX \pm 0.005"}$

SHIELD IS FOR HOUSING ESD PATH ONLY

Shaft Configurations

Shaft Dimensions (D-cut shown also)

$c \pm \dfrac{0.13}{0.005}$ D-CUT THICKNESS

$\dfrac{1.27}{0.050}$ FLANGE THICKNESS

$\dfrac{0.76}{0.030}$ FLANGE FLAT DEPTH

$\dfrac{8.03}{0.316}$ FLANGE DIA.

$\dfrac{6.40}{0.252}$ FLANGE FLATS

$b \pm \dfrac{0.13}{0.005}$ D-CUT LENGTH

$l \pm \dfrac{0.13}{0.005}$ SHAFT LENGTH

$d \begin{array}{c} + \dfrac{0.025}{0.001} \\ - \dfrac{0.050}{0.002} \end{array}$ SHAFT DIA.

CHAMFER 0.76mm (0.030) x 45°

DIMENSIONS ARE: $\dfrac{mm}{INCHES}$
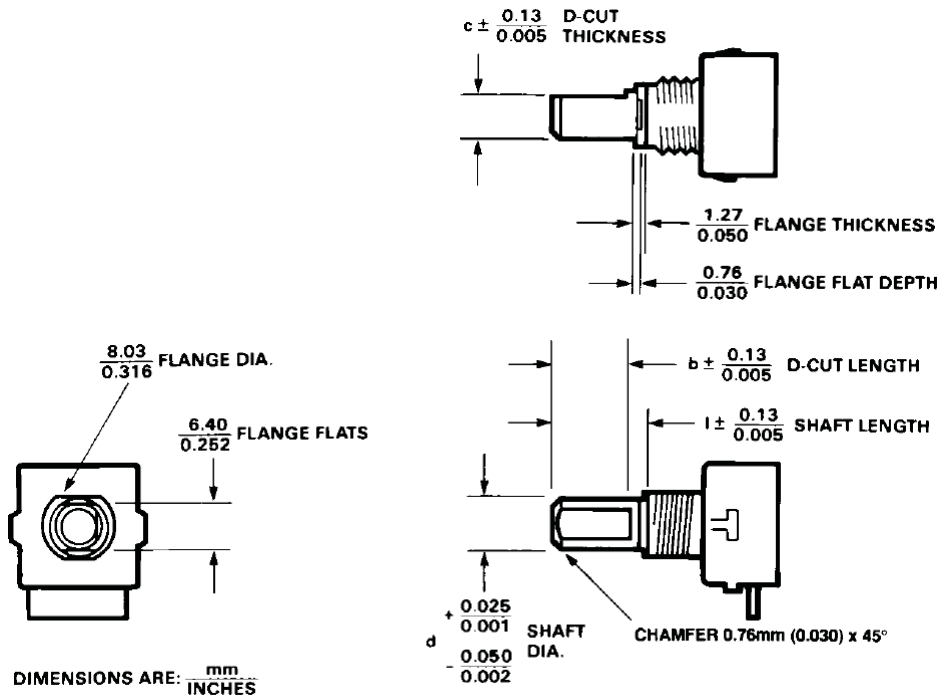
Shaft Options Available

Option #	Shaft Length (l)	Shaft Diameter (d)	D-Cut Thickness (c)	D-Cut Length (b)	Sketch (not to scale)	
11	0.30″	0.251″	–	–		
13	0.30″	0.250″	0.225″	0.230″		
14	0.50″	0.251″	–	–		
16	0.50″	0.250″	0.225″	0.400″		
17	0.80″	0.251″	–	–		
19	0.80″	0.250″	0.225″	0.700″		
51	7.6 mm	6.02 mm	–	–		
53	7.6 mm	6.00 mm	5.33 mm	5.84 mm		
54	12.7 mm	6.02 mm	–	–		
56	12.7 mm	6.00 mm	5.33 mm	10.16 mm		
57	20.32 mm	6.02 mm	–	–		
59	20.32 mm	6.00 mm	5.33 mm	17.78 mm		

Typical Interface

HRPG SERIES — CH A / CH B — HCTL-2016/2020 QUADRATURE DECODER/ COUNTER — HOST PROCESSOR
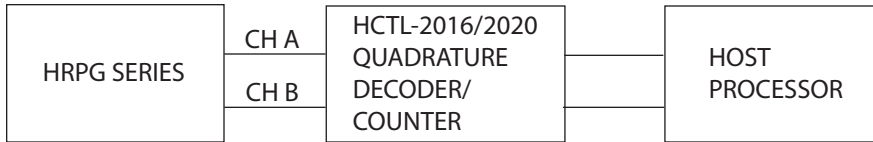
Ordering Information

HRPG - A ☐ ☐ ☐ # ☐ ☐ ☐

Shaft / Resolution

S16 – Smooth 16CPR
D16 – Detented 16CPR*
S32 – Smooth 32CPR
D32 – Detented 32CPR*
SCA – Smooth 120CPR

Mechanical Configuration

11 – 0.3" long, 0.25" dia.
13 – 0.3" long, 0.25" dia. D-cut

14 – 0.5" long, 0.25" dia.
16 – 0.5" long, 0.25" dia. D-cut

17 – 0.8" long, 0.25" dia.
19 – 0.8" long, 0.25" dia. D-cut

51 – 7.6 mm long, 6 mm dia.
53 – 7.6 mm long, 6 mm dia. D-cut

54 – 12.7 mm long, 6 mm dia.
56 – 12.7 mm long, 6 mm dia. D-cut

Termination

F – Pins Front with Bracket
R – Pins Rear with Bracket
C – Cable Connector with Strain Relief

*Note: When ordering detented versions, a D-cut shaft is recommended.

HRPG Series		11	13	14	16	17	19	51	53	54	56	57	59
AD16	F				*					*	*		*
	R				*			*		*			
	C				*						*		
	L												
AD32	F		*	*	*		*	*	*			*	*
	R	*	*	*	*		*		*	*	*		*
	C	*	*	*	*	*			*	*	*		*
	L												
AS16	F					*				*			
	R	*							*				
	C			*					*				
	L												
AS32	F	*	*								*		
	R		*	*					*				
	C			*									*
	L												
ASCA	F	*		*	*	*	*		*	*	*	*	*
	R	*	*	*	*	*	*	*		*	*		
	C	*	*	*	*	*	*		*	*	*		*
	L												

For product information and a complete list of distributors, please go to our web site: **www.avagotech.com**

Avago
TECHNOLOGIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Avago Technologies:

HRPG-AD16#16C HRPG-AD16#16F HRPG-AD16#16R HRPG-AD16#51R HRPG-AD16#54F HRPG-AD16#54R
HRPG-AD16#56C HRPG-AD16#56F HRPG-AD16#59F HRPG-AD32#11C HRPG-AD32#11R HRPG-AD32#13C
HRPG-AD32#13F HRPG-AD32#13R HRPG-AD32#14C HRPG-AD32#14F HRPG-AD32#14R HRPG-AD32#16C
HRPG-AD32#16F HRPG-AD32#16R HRPG-AD32#17C HRPG-AD32#19F HRPG-AD32#19R HRPG-AD32#51F
HRPG-AD32#53C HRPG-AD32#53F HRPG-AD32#53R HRPG-AD32#54C HRPG-AD32#54R HRPG-AD32#56C
HRPG-AD32#56R HRPG-AD32#57F HRPG-AD32#59C HRPG-AD32#59F HRPG-AD32#59R HRPG-AS16#11R
HRPG-AS16#14C HRPG-AS16#17F HRPG-AS16#51C HRPG-AS16#53R HRPG-AS16#54F HRPG-AS32#11R
HRPG-AS32#13F HRPG-AS32#13R HRPG-AS32#14C HRPG-AS32#14R HRPG-AS32#53R HRPG-AS32#56F
HRPG-AS32#59C HRPG-ASCA#11C HRPG-ASCA#11F HRPG-ASCA#11R HRPG-ASCA#13C HRPG-ASCA#13R
HRPG-ASCA#14C HRPG-ASCA#14F HRPG-ASCA#14R HRPG-ASCA#16C HRPG-ASCA#16F HRPG-ASCA#16R
HRPG-ASCA#17C HRPG-ASCA#17F HRPG-ASCA#17R HRPG-ASCA#19C HRPG-ASCA#19F HRPG-ASCA#19R
HRPG-ASCA#51R HRPG-ASCA#53C HRPG-ASCA#53F HRPG-ASCA#54C HRPG-ASCA#54F HRPG-ASCA#54R
HRPG-ASCA#56C HRPG-ASCA#56F HRPG-ASCA#56R HRPG-ASCA#57F HRPG-ASCA#59C HRPG-ASCA#59F
HRPG-AD32#51C