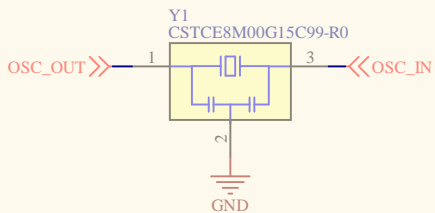

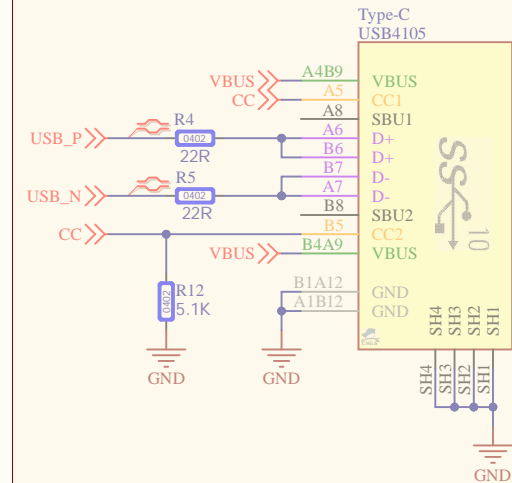
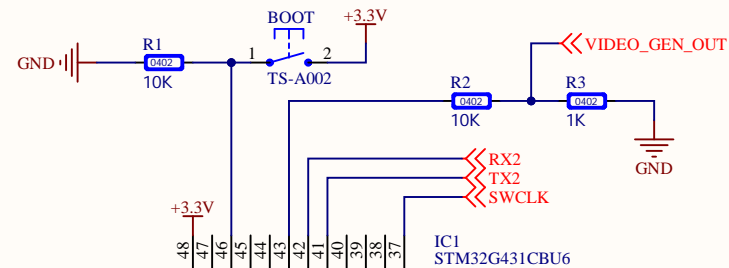


OpenPixelOSD





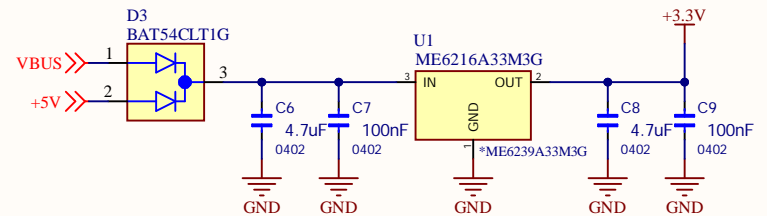
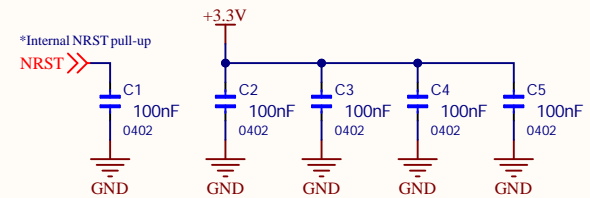
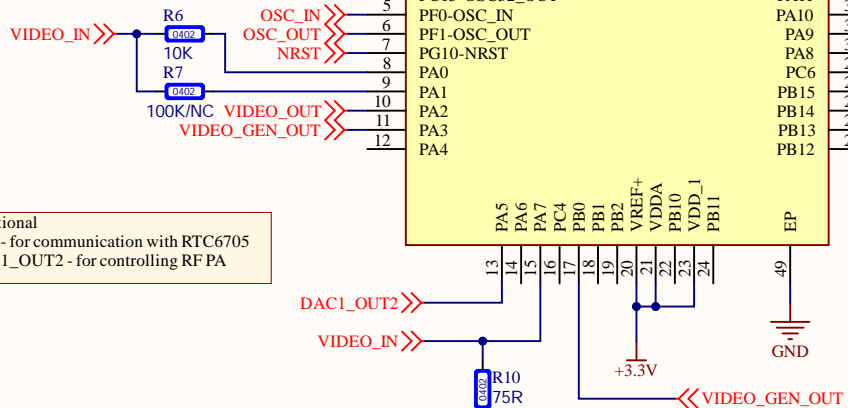
*Optional: it is better to use an external RCC for temperature stability together with VTX



Note: Place **R6** and **R7** close to STM32 **IC1** pins.



* Optional
SPI2 - for communication with RTC6705
DAC1_OUT2 - for controlling RF PA

Page Contents: **Sheet1.SchDoc**

Drawn By: VitaliyN

Size: A4

Date: 03.06.2025

Number: *

Time: 21:58:23

License:

Website:

File: D:\WORK\OpenPixelOSD_BreakoutBoard\Sheet1.SchDoc



open source
hardware