

OT SCOUT

Passive OT/ICS Network Assessment


A guided walkthrough of the application — v0.14

Every screen in this deck is populated with a fictitious sample engagement — Riverbend Regional Water Utility — so you can see exactly what your team receives: live capture, inventory, zone mapping, conduit review, findings, a client-ready report, a hashed evidence package and an evidence-grounded assistant.

Sample data shown is entirely fictitious, for illustration only.

How OT Scout works

Four passive stages turn raw traffic into an assessor-ready deliverable.

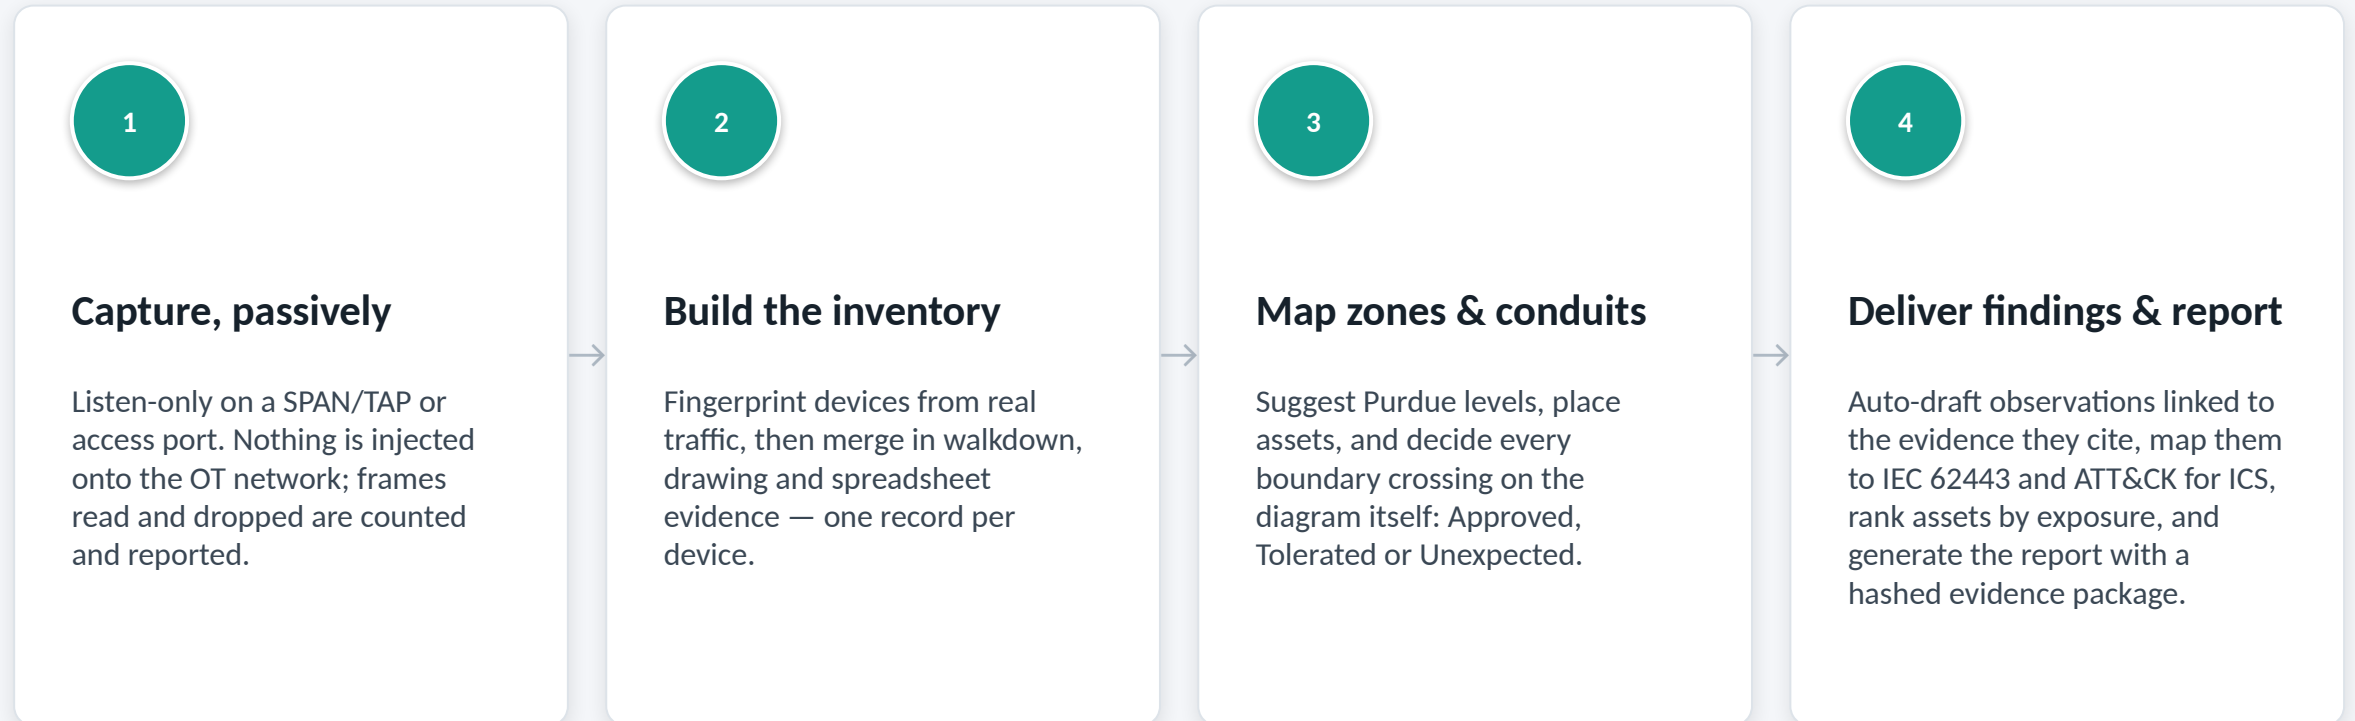

The application is organized into eight tabs, in this order: Collect → Sites → Inventory → Communications → Zones → Findings → Report → Scout Assist. The rest of this deck steps through each one.

Collect — start a passive capture

Where an engagement begins: point OT Scout at a mirror port and let it listen.

OT Scout Passive Assessment Prototype v0.14.0

DEMO DATABack to my dataStopped0:00SettingsAssessment guideAbout

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

Collect

Sites

Inventory

Communications

Zones

Findings

Report

Scout Assist

27 physical assets

27 identities

21 relationships

17 findings

2 sessions

Mixed visibility

Assessment

Site

Collection point

Access method

Capture interface

Throttle

Start

Stop

☒ Save raw PCAP of this capture (evidence of record; stored under data/captures/)

Visibility confidence

2 collection points: mirror/TAP visibility likely at Control room core switch SPAN; access-port visibility only at LS-7 panel switch spare port. Coverage must be judged per network leg. Coverage must be reconciled by network leg, collection point, drawings, switch data and walkdown evidence.

27

Likely physical assets

27

Observed L2 identities

21

Unicast relationships

77

Raw flows

4303

Packets observed

2

Collection sessions

Import an existing Ethernet PCAP

Choose File

No file chosen

Import

Limit: 512 MB classic Ethernet PCAP (read into memory during import). Imported visibility depends on the original collection point.

Collection sessions

Every capture and PCAP import is a session; durations feed the report.

Assessment	Site	Collection point	Access/source	Interface/file	Frames	Dropped	PCAP	Started	Duration
Riverbend Regional Water Utility — OT assessment	Lift Station 7	LS-7 panel switch spare port	Unconfirmed access port / live	eth0	22 22 recorded	0	not saved	2026-08-28T14:05:00+00:00	45:00
Riverbend Regional Water Utility — OT assessment	Main WTP	Control room core switch SPAN	Configured SPAN/mirror / live	eth0	4281 4281 recorded	0	not saved	2026-08-27T13:10:00+00:00	3:30:00

1 One click to start listening

Capture is entirely passive — nothing is sent to the network, so it is safe on live production OT. A throttle is there for fragile SPAN setups.

2 Raw PCAP kept by default

Every session writes the raw capture to disk: the evidence of record, and what lets a capture be re-run through a later build. Frames read and frames dropped are counted from the kernel and shown in red if the laptop falls behind.

3 Automatic visibility grading

Each collection point is rated mirror/TAP versus access-port-only before its evidence is used in any conclusion.


OT Scout Passive Assessment Prototype v0.14.0
DEMO DATA
[Back to my data](#)
Stopped
0:00
[Settings](#)
[Assessment guide](#)
[About](#)

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

Collect
Sites
Inventory
Communications
Zones
Findings
Report
Scout Assist

27 physical assets
27 identities
21 relationships
17 findings
2 sessions
Mixed visibility

Site validation and collection-point matrix

Lift Station 7 — Riverbend Regional Water Utility — OT assessment
New site
Delete site

One checklist per site (from the OT assessment site-validation scope) and one row per network leg. Link each leg to a collection point so coverage is computed from the sessions captured there.

Site name	Assessment	Facility type	Walkdown date
Lift Station 7	Riverbend Regional Water Utility — OT assessment	Sewage lift station, 2 pumps	2026-08-28

Operational function and criticality

Wet-well level control; overflow to creek on failure

Documentation obtained

Panel schedule; RTU settings export

Deviations from expected architecture

Spare Ethernet port on panel switch active and unsecured; cellular modem not on drawing

Save site
Checklist 8/11 complete · 1 network leg(s), 1 with evidence

Site-validation checklist

Status, evidence reference and notes save per row

Item	Status	Evidence reference	Notes
Facility type and operational function What the site does, its process criticality and who operates it	Complete	Walkdown 2026-08-28; photos 201-224	Save
Network ingress and egress points Every physical and logical path in or out: WAN, fibre, radio, cellular, vendor links, dial-up	Not started	Photo IDs, document names, interviewee	Save
OT asset categories and managed switching SCADA servers, HMIs, EWS, historians, PLCs/RTUs/drives, safety systems, gateways, converters, radios, modems; managed vs unmanaged switching	Complete	Walkdown 2026-08-28; photos 201-224	Save
SCADA and historian communications Masters, redundancy, polling paths, historian collection and replication, access paths	Not applicable	Photo IDs, document names, interviewee	Covered at Main WTP Save
Remote-access and vendor-support paths Jump hosts, VPNs, vendor tools, cellular modems, dormant accounts, bypass mechanisms	Not started	Photo IDs, document names, interviewee	Save

Derived from the OT & Site Assessment SME scope, with status and evidence reference tracked per item; network legs below link to the capture sessions.


OT Scout Passive Assessment Prototype v0.14.0
DEMO DATA
Back to my data
Stopped
0:00
Settings
Assessment guide
About

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

Collect
Sites
Inventory
Communications
Zones
Findings
Report
Scout Assist

27 physical assets
27 identities
21 relationships
17 findings
2 sessions
Mixed visibility

Documented assets (walkdown, drawings, customer inventory)

Download CSV template
Add asset

Devices the capture cannot see — serial PLCs, RTUs, radios, safety systems, spares — enter the same inventory with their source recorded. A row with a MAC address links to passive evidence for that MAC when it appears; a row without one stays "Documented, not observed". Re-importing a spreadsheet updates existing rows.

Filled-in template (CSV)

Choose File
No file chosen

Default source for rows with a blank source

Spreadsheet import

Import CSV

Asset inventory and assessment context

Update IEEE vendors
Export assets
Export assessment

Identity	Manufacturer / model	Device type	Identity classification	Assessment context	Evidence	Packets
WTP-SCADA-A 10.20.3.11 00:14:22:10:00:11	Dell Inc. PowerEdge R640	SCADA server (primary) Assessor override · 95%	Physical endpoint Globally administered MAC observed on Ethernet; corroborated by documented record (Physical walkdown)	Level 2 Assessor-assigned Exposure 75 · Critical Location: Control room rack CR-1 Criticality: Critical Zone: Supervisory control Plant-wide SCADA (GE iFIX)	Physical walkdown OPC UA GetEndpoints response ARP, DHCP, DNP3, ETHERNET-IP, MODBUS-TCP, OPC-UA, RDP, S7COMM, TCP · 22 fingerprint claim(s) Control room core switch SPAN / eth0	Edit
WTP-HIST01 10.20.3.21 00:14:22:10:00:21	Dell Inc. PowerEdge R740	Historian Assessor override · 95%	Physical endpoint Globally administered MAC observed on Ethernet; corroborated by documented record (Physical walkdown)	Level 3 Assessor-assigned · Suggested: Level 2 75% apply Exposure 58 · High Location: Control room rack CR-1 Criticality: High Zone: Site operations Process historian (AVEVA PI)	Physical walkdown OPC UA CreateSession request ARP, DHCP, LDAP, NTP, OPC-UA, SMB, TCP · 14 fingerprint claim(s) Control room core switch SPAN / eth0	Edit
HSP-PLC-03 10.20.1.61 00:00:bc:30:00:61	Rockwell Automation 1756-L83E/B LOGIX5583E 00A1B2C3 20.011	PLC Assessor override · 95%	Physical endpoint Globally administered MAC observed on Ethernet; corroborated by documented record (Physical walkdown)	Level 1 Assessor-assigned Exposure 40 · Moderate Location: Pump room MCC-3 Criticality: Critical Zone: High-service pumping High-service pump control	Physical walkdown EtherNet/IP ListIdentity ARP, ETHERNET-IP, ETHERNET-IP-IO · 18 fingerprint claim(s) Control room core switch SPAN / eth0	Edit
WTP-HMI-CHEM 10.20.2.42 00:0e:8c:20:00:42	Siemens AG SIMATIC HMI TP1200 Comfort	HMI Assessor override · 75%	Physical endpoint Globally administered MAC observed on Ethernet;	Level 2 Assessor-assigned	Physical walkdown Observed ETHERNET-IP traffic; payload identity not confirmed	Edit

Every claim — manufacturer, model, firmware — is backed by the protocol payload that produced it: S7, EtherNet/IP identity reads, OPC UA handshakes, DNP3, Modbus.

Communications — deduplicated relationships

Every observed conversation, collapsed to one row per device pair and labeled with the zone boundary it crosses.

OT Scout Passive Assessment Prototype v0.14.0

DEMO DATA

Back to my data

Stopped

0:00

Settings

Assessment guide

About

Passive by default.

Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

Collect

Sites

Inventory

Communications

Zones

Findings

Report

Scout Assist

27 physical assets

27 identities

21 relationships

17 findings

2 sessions

Mixed visibility

Deduplicated communication relationships

Export relationships

Endpoint A	Endpoint B	Zone pair	Category	Protocols	Collection point / interface	Flows	Packets	Conduit decision (saves on change)		
WTP-SCADA-A Level 2	WTP-HIST01 Level 3	Level 2 to Level 3	Local asset-to-asset	OPC-UA, TCP	Control room core switch SPAN eth0	4	850	Approved	Historian collection	Save
WTP-HMI-CHEM Level 2	HSP-PLC-03 Level 1	Level 1 to Level 2	Local asset-to-asset	ETHERNET-IP, ETHERNET-IP-IO	Control room core switch SPAN eth0	3	580	Approved	HMI to HSP PLC; in	Save
WTP-SCADA-A Level 2	FP3-MGATE-01 Level 1	Level 1 to Level 2	Local asset-to-asset	MODBUS-TCP	Control room core switch SPAN eth0	2	442	Approved	SCADA polling series	Save
WTP-SCADA-A Level 2	CHEM-PLC-02 Level 1	Level 1 to Level 2	Local asset-to-asset	S7COMM	Control room core switch SPAN eth0	2	360	Approved	SCADA polling cher	Save
WTP-SCADA-A Level 2	filter-plc-01 Level 1	Level 1 to Level 2	Local asset-to-asset	S7COMM	Control room core switch SPAN eth0	2	360	Approved	SCADA polling filter	Save
WTP-SCADA-A Level 2	HSP-PLC-03 Level 1	Level 1 to Level 2	Local asset-to-asset	ETHERNET-IP	Control room core switch SPAN eth0	5	325	Approved	SCADA to HSP PLC	Save
Unknown camera (GI1/14) Level 1	34.120.5.9 External	OT to external/internet	Asset-to-external/internet	HTTPS	Control room core switch SPAN eth0	2	280	Unexpected	Unknown camera st	Save
RVB-DC01 Level 4	WTP-HIST01 Level 3	OT to enterprise (bypasses industrial DMZ)	Local asset-to-asset	LDAP, NTP, SMB	Control room core switch SPAN eth0	6	250	Unexpected	Enterprise DC open	Save
WTP-SCADA-A Level 2	ADMIN-PC-214 Level 4	OT to enterprise (bypasses industrial DMZ)	Local asset-to-asset	RDP	Control room core switch SPAN eth0	2	90	Unexpected	Plant manager work	Save
WTP-SCADA-B Level 2	CHEM-PLC-02 Level 1	Level 1 to Level 2	Local asset-to-asset	S7COMM	Control room core switch SPAN eth0	2	80	Approved	Standby SCADA po	Save
WTP-SCADA-B Level 2	filter-plc-01 Level 1	Level 1 to Level 2	Local asset-to-asset	S7COMM	Control room core switch SPAN eth0	2	80	Approved	Standby SCADA po	Save
WTP-EWS01 Level 3	45.79.12.34 External	OT to external/internet	Asset-to-external/internet	RDP	Control room core switch SPAN eth0	2	70	Tolerated	Integrator remote su	Save

1 Zone pair on every relationship

Each conversation is automatically labeled by the Purdue levels it connects, so boundary crossings are visible at a glance.

2 One-click conduit approval

Mark a relationship Approved, Tolerated or Unexpected — the decision saves immediately and feeds the diagram, the exposure score and the report. The same control now lives on the Zones tab.

3 Risk surfaces on its own

An unrecognized device (here, a consumer camera) talking to the internet from an OT VLAN is flagged without anyone having to go looking for it.

Zones — Purdue placement & conduit review

Every asset placed on the Purdue model, every conduit rolled up by zone pair, numbered to match the diagram.

OT Scout Passive Assessment Prototype v0.14.0

DEMO DATABack to my dataStopped0:00SettingsAssessment guideAbout

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

CollectSitesInventoryCommunicationsZonesFindingsReportScout Assist

27 physical assets27 identities21 relationships17 findings2 sessionsMixed visibility

Purdue zones and conduits

23/24 assigned (3 network infrastructure excluded; 22 by assessor, 1 from suggestion; 1 suggested, 0 no evidence) · 7 boundary pair(s) · 0 crossing relationship(s) unreviewed · 3 unexpected

Accept suggested levelsExport diagram (SVG)

Assign a Purdue level to each physical asset in the inventory above; relationships then show the zone pair they cross. Record a conduit decision (Approved / Tolerated / Unexpected) on each relationship so the report can separate expected communications from findings.

Each row is numbered to match the badge on its line in the diagram below. Click a row (or a line) to highlight that conduit and open its findings — what cites it, what was rejected, and a draft if nothing does; click again to clear.

#	Zone pair	Boundary	Relationships	Packets	Protocols	Approved	Tolerated	Unexpected	Unreviewed
1	Level 2 ↔ Level 2	Level 1 to Level 2	9	2347	DNP3, ETHERNET-IP, ETHERNET-IP-IO, MODBUS-TCP, S7COMM	9	0	0	0
2	Level 2 ↔ Level 3	Level 2 to Level 3	2	864	HTTP, OPC-UA, TCP	2	0	0	0
3	Level 1 ↔ External	OT to external/Internet	1	280	HTTPS	0	0	1	0
4	Level 4 ↔ Level 4	OT to enterprise (bypasses industrial DMZ)	1	250	LDAP, NTP, SMB	0	0	1	0
5	Level 1 ↔ Level 3	Level 1 to Level 3	3	138	ETHERNET-IP, S7COMM	3	0	0	0
6	Level 2 ↔ Level 4	OT to enterprise (bypasses industrial DMZ)	1	90	RDP	0	0	1	0
7	Level 3 ↔ External	OT to external/Internet	1	70	RDP	0	1	0	0
8	Level 4 ↔ Network infrastructure	Within level	2	120	SNMP	0	2	0	0
9	Level 3 ↔ Network infrastructure	Within level	1	16	TELNET	0	1	0	0

Purdue zones and observed conduits

External

2 external endpoint(s) observed

Level 5

1 Bulk-accept suggested levels

Review every suggested placement at once instead of asset-by-asset — a full engagement can be leveled in minutes. Levels you set yourself are never overwritten.

2 Numbered zone-pair rows

Relationships, packets, protocols and Approved / Tolerated / Unexpected counts per level pair. The number is the same badge the line carries in the diagram.

3 Click a row: what does it mean?

Row 4 is the OT-to-enterprise path that bypasses the industrial DMZ. Selecting it highlights that conduit, fades the rest, and opens its drawer — next slide.

OT Scout Passive Assessment Prototype v0.14.0
DEMO DATA
Back to menu

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical access to the network.

Collect
Sites
Inventory
Communications
Zones
Findings
Report
Scout Assist

27 physical assets
27 identities
21 relationships
17 findings
2 sessions
Mixed visibility

Purdue zones and conduits

23/24 assigned (3 network infrastructure excluded; 22 by assessor, 1 from suggestion; 1 suggested, 0 no evidence) · 7 boundary pair(s) · 0 crossing

Accept suggested levels
Export diagram (SVG)

Assign a Purdue level to each physical asset in the inventory above; relationships then show the zone pair they cross. Record a conduit decision (Approved / Tolerated / Unexpected) on each relationship from findings.

Each row is numbered to match the badge on its line in the diagram below. **Click a row** (or a line) to highlight that conduit and open its findings — what cites it, what was rejected, and a list of findings.

#	Zone pair	Boundary	Relationships	Packets	Protocols
1	Level 1 ↔ Level 2	Level 1 to Level 2	9	2347	DNP3, ETHERNET-IP, ETHERNET-IP-IO, MODBUS-TCP, S7COMM
2	Level 2 ↔ Level 3	Level 2 to Level 3	2	864	HTTP, OPC-UA, TCP
3	Level 1 ↔ External	OT to external/Internet	1	280	HTTPS
4	Level 3 ↔ Level 4	OT to enterprise (bypasses industrial DMZ)	1	250	LDAP, NTP, SMB
5	Level 1 ↔ Level 3	Level 1 to Level 3	3	138	ETHERNET-IP, S7COMM
6	Level 2 ↔ Level 4	OT to enterprise (bypasses industrial DMZ)	1	90	RDP
7	Level 3 ↔ External	OT to external/Internet	1	70	RDP
8	Level 4 ↔ Network infrastructure	Within level	2	120	SNMP
9	Level 3 ↔ Network infrastructure	Within level	1	16	TELNET

Purdue zones and observed conduits

External

2 external endpoint(s) observed

Level 5

Conduit #4 · OT to enterprise (bypasses industrial DMZ)
· 1 relationship(s), 250 packets

Level 3 ↔ Level 4 — LDAP, NTP, SMB

Findings citing this conduit (1)

OBS-05
High priority
Validated
OT Scout draft

Enterprise-to-OT communications bypass the documented industrial DMZ

The historian is joined to the enterprise Active Directory and receives SMB sessions from the enterprise domain controller; the plant manager's enterprise workstation opens RDP directly to the primary SCADA server. Drawing WTP-NET-004 shows...

Open finding

Draft finding from this conduit

Relationships in this pair (1)

Unreviewed first. A decision saves as soon as you change it; the table and diagram follow.


RVB-DC01 (Level 4) ↔ **WTP-HIST01** (Level 3)
LDAP, NTP, SMB · 250 pkts

Unexpected
Enterprise DC opens SMB into OT historian; histor

If nothing cites a conduit — especially one marked Unexpected — the drawer says so and opens a finding pre-filled with the zone pair, protocols and relationships, already linked.

The Purdue band diagram

Every asset in its band; every conduit its own numbered line, bold where it lands and faint where it only passes through.

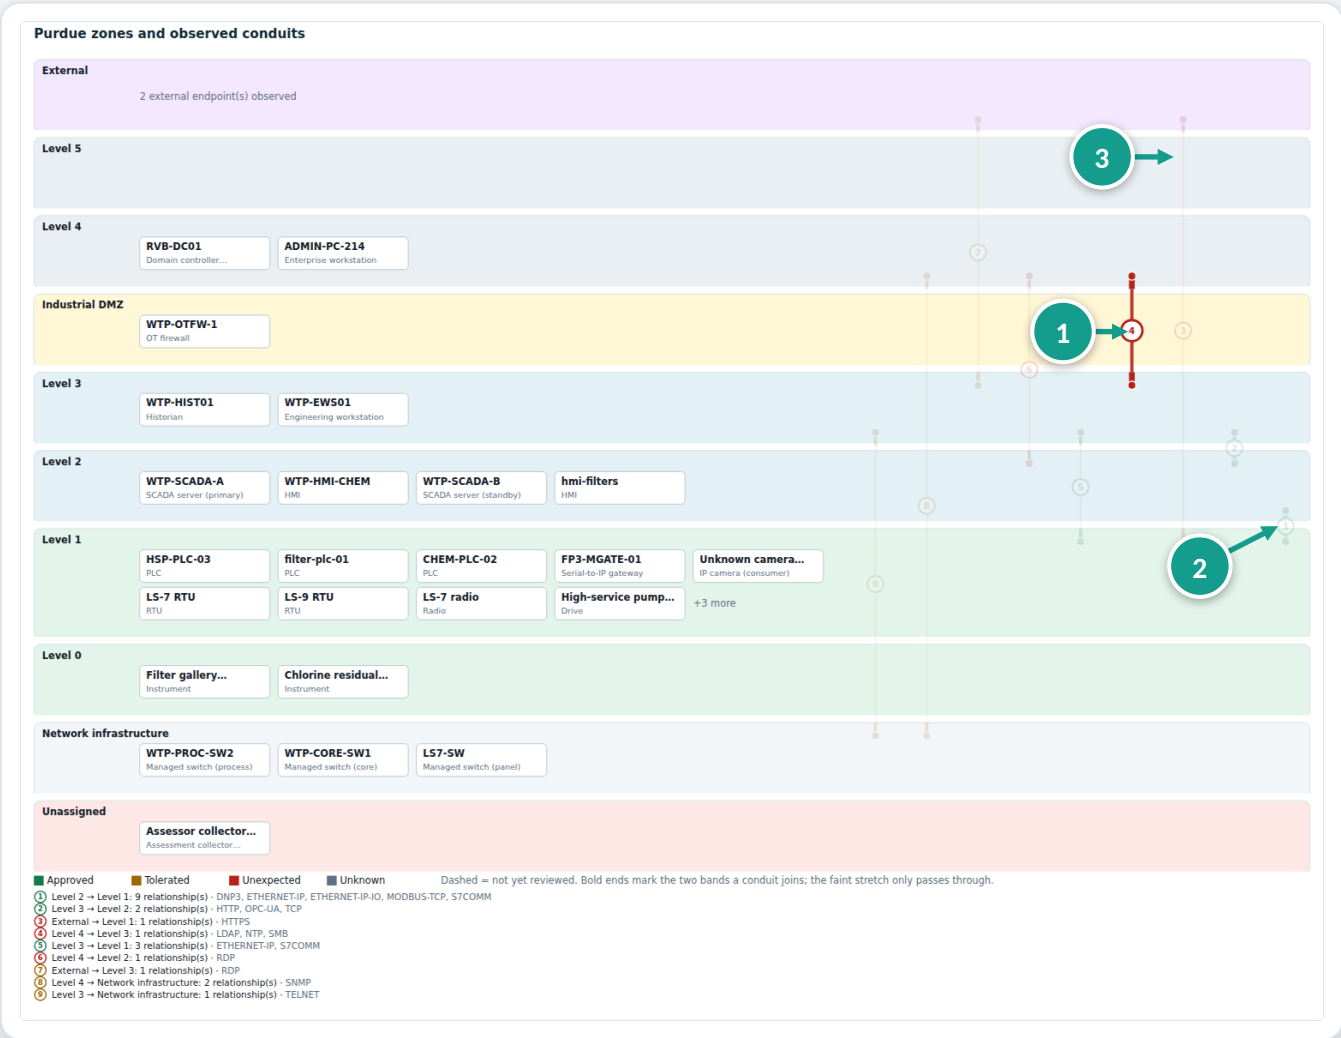

1 Conduit 4, selected

The historian at Level 3 talking straight to the enterprise domain controller at Level 4 — no DMZ in between. Selected in the table, so every other line fades.

2 Short lines stay short

Conduit 1 joins Level 2 to Level 1 and is drawn only between those two bands. The dots sit inside the bands they join, never on the boundary.

3 Pass-through is faint

Conduit 3 runs from External to Level 1; where it crosses Level 5 and 4 the line is faint — it passes through. Nothing red touches the Industrial DMZ band: the firewall is on the drawing, not in the path.

Findings — a register, not a black box

Evidence produces draft observations; the assessor decides what becomes a finding — and each finding knows what it is about.

OT Scout Passive Assessment Prototype v0.14.0

DEMO DATABack to my dataStopped0:00SettingsAssessment guideAbout

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

CollectSitesInventoryCommunicationsZonesFindingsReportScout Assist

27 physical assets27 identities21 relationships17 findings2 sessionsMixed visibility

Findings and observations register

Confirmed deficiencies, evidence gaps, improvement opportunities and positive observations. Drafts generated from evidence must be validated before delivery; the report renders this register and rolls the roadmap up from each finding's horizon.

1

Import auto-drafted observationsNew finding

Ref	Finding	Type	Rating	Confidence	Owner	Horizon	Status	Source	
FND-01	Unknown consumer IP camera connected to the process VLAN and streaming to the internet A Wyze consumer camera with no owner, not on any drawing or inventory, was found plugged into a spare port on the process switch during the walkdown. 62443 SR 5.1 Network segmentation; SR 5.2 Zone boundary protection; SR 1.2 Software process and device identification and authentication; SR 7.8 Control system component inventory ATT&CK T0883 Internet Accessible Device; T0884 Connection Proxy; T0886 Remote Services	Control deficiency	Critical	High	OT engineering / plant superintendent	Immediate / quick win	Validated	Assessor	Edit
FND-02	Vendor remote access to the engineering workstation has no approval workflow or session control The integrator holds a standing RDP path from a public address (45.79.12.34) through the OT firewall to the engineering workstation. Staff c 62443 SR 1.13 Access via untrusted networks; SR 2.6 Remote session termination; SR 5.2 Zone boundary protection; 2-4 SP.07 Remote access ATT&CK T0822 External Remote Services; T0886 Remote Services; T0843 Program Download	Control deficiency	High priority	Moderate	IT security / OT engineering	30-90 days	Validated	Assessor	Edit
OBS-01	Network legs without an evidence source 1 of 5 recorded network leg(s) have no collected evidence: Main WTP: Enterprise / IT boundary (Planned, NetFlow / firewall logs). 62443 SR 7.8 Control system component inventory	Evidence gap	High priority	High	IT network lead	Immediate / quick win	Validated	OT Scout draft	Edit
OBS-04	OT assets communicate directly with external or internet endpoints 1 relationship(s) between assets at Purdue Level 3 or below and external/internet endpoints were reviewed by the assessor and marked Unexpec 62443 SR 5.1 Network segmentation; SR 5.2 Zone boundary protection; SR 5.4 Application partitioning ATT&CK T0883 Internet Accessible Device; T0822 External Remote Services; T0886 Remote Services	Evidence gap	High priority	High	OT network owner / firewall owner	Immediate / quick win	Rejected	OT Scout draft	Edit
OBS-05	Enterprise-to-OT communications bypass the documented industrial DMZ The historian is joined to the enterprise Active Directory and receives SMB sessions from the enterprise domain controller; the plant manage 62443 SR 5.1 Network segmentation; SR 5.2 Zone boundary protection; SR 5.4 Application partitioning ATT&CK T0886 Remote Services; T0866 Exploitation of Remote Services; T0859 Valid Accounts	Control deficiency	High priority	High	IT security / OT engineering	Immediate / quick win	Validated	OT Scout draft	Edit
OBS-07	End-of-life or end-of-support OT assets in service 3 asset(s) are recorded as end of life or end of support: filter-plc-01 (6ES7 315-2EH14-0AB0; End of support), CHEM-PLC-02 (6ES7 315-2EH14-0 62443 2-4 SP.11 Patch management; SR 7.8 Control system component inventory ATT&CK T0866 Exploitation of Remote Services; T0890 Exploitation for Privilege	Control deficiency	High priority	High	OT engineering	3-12 months	Validated	OT Scout draft	Edit

- 1

Auto-drafted from evidence

Coverage gaps, EOL assets, DMZ bypasses, external paths, OPC UA anonymous logon — drafted directly from what was captured, each mapped to IEC 62443 and ATT&CK for ICS.
- 2

One problem, one finding

FND-01 is the assessor's own camera finding from the walkdown. The auto-draft for the same conduit (OBS-04) is Rejected as superseded, not left as a duplicate. Two cameras with the same problem would still be one finding.
- 3

Linked to the conduits and assets it cites

Every finding records the relationships, zone pairs and assets behind it, so the diagram can open it and a re-import never duplicates a retitled finding. Nothing reaches the report until a person validates it.

Assets to address first

What the plant manager sees first — in the app and on page 4 of the Word report.

OT Scout Passive Assessment Prototype v0.14.0

DEMO DATABack to my dataStopped0:00SettingsAssessment guideAbout

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

CollectSitesInventoryCommunicationsZonesFindingsReportScout Assist

27 physical assets27 identities21 relationships17 findings2 sessionsMixed visibility

Executive readout

Assets to address first. Exposure (0-100) is a prioritisation score from what was discovered and documented: criticality, boundary crossings and their decisions, lifecycle, backups, cleartext management, OPC UA posture, and findings in the register that name the asset. Every point is itemised; it is not a vulnerability score.

1

Asset	Type / level	Criticality	Exposure	Why
WTP-SCADA-A Dell Inc. PowerEdge R640	SCADA server (primary) Level 2	Critical	75 - Critical	Criticality Critical (+40); OT-to-enterprise path bypassing the industrial DMZ (1, worst decision Unexpected) (+20); Backup backed up, untested (+5); OPC UA server offers SecurityPolicy None and/or anonymous logon (+10)
WTP-EWS01 Hewlett Packard Z2 G9	Engineering workstation Level 3	High	64 - High	Criticality High (+30); Talks to an external endpoint (1 relationship(s), worst decision Tolerated) (+12); No backup (+10); Named in 1 finding(s) in the register, worst High priority (FND-02) (+12)
filter-plc-01 Siemens AG 6ES7 315-2EH14-0AB0	PLC Level 1	Critical	60 - High	Criticality Critical (+40); Lifecycle: End of support (+15); Backup backed up, untested (+5)
WTP-HIST01 Dell Inc. PowerEdge R740	Historian Level 3	High	58 - High	Criticality High (+30); OT-to-enterprise path bypassing the industrial DMZ (1, worst decision Unexpected) (+20); OPC UA client uses an unencrypted channel and/or anonymous logon (+8)
CHEM-PLC-02 Siemens AG 6ES7 315-2EH14-0AB0	PLC Level 1	Critical	55 - High	Criticality Critical (+40); Lifecycle: End of support (+15)
RVB-DC01 Dell Inc. PowerEdge R650	Domain controller (enterprise) Level 4	High	55 - High	Criticality High (+30); OT-to-enterprise path bypassing the industrial DMZ (1, worst decision Unexpected) (+20); Backup status not recorded (+5)
Unknown camera (Gi1/14) Wyze Labs Inc	IP camera (consumer) Level 1	Low	55 - High	Criticality Low (+10); Talks to an external endpoint (1 relationship(s), worst decision Unexpected) (+25); Named in 1 finding(s) in the register, worst Critical (FND-01) (+20)
WTP-OTFW-1 Cisco Systems Firepower 1120	OT firewall Industrial DMZ	Critical	52 - High	Criticality Critical (+40); Named in 1 finding(s) in the register, worst High priority (FND-02) (+12)
LS-9 RTU Schweitzer Engineering Laboratories SEL-3505	RTU Level 1	High	51 - High	Criticality High (+30); Lifecycle: Extended support (+5); No backup (+10); Named in 1 finding(s) in the register, worst Moderate (FND-03) (+6)
WTP-CORE-SW1 Cisco Systems IE-4000	Managed switch (core) level unassigned	Critical	48 - High	Criticality Critical (+40); Serves cleartext management: SNMP (+8)
WTP-PROC-SW2 Cisco Systems IE-3400	Managed switch (process) level unassigned	Critical	48 - High	Criticality Critical (+40); Serves cleartext management: SNMP, Telnet (+8)
LS-7 RTU Schweitzer Engineering Laboratories SEL-3505	RTU Level 1	High	46 - High	Criticality High (+30); Lifecycle: Extended support (+5); Backup unknown (+5); Named in 1 finding(s) in the register, worst Moderate (FND-03) (+6)
WTP-SCADA-B Dell Inc. PowerEdge R640	SCADA server (standby) Level 2	Critical	45 - High	Criticality Critical (+40); Backup backed up, untested (+5)

2What the plant manager sees first — the same three tables lead the Word report.

3

1 Ranked by exposure

A 0–100 prioritisation score, not a vulnerability score: criticality, boundary crossings and their decisions, lifecycle, backups, cleartext management, OPC UA posture, validated findings.

2 Every point itemised

“Why is my historian a 58?” is answered on the page — each factor and its points are printed next to the number, so the ranking can be defended, and corrected by fixing the input.

3 Fleet view and 62443 rollup below

The same panel groups the inventory by model (units, firmware spread, EOL, backups) and lists which IEC 62443 requirements the findings bear on, most-cited first.

Report — a finished Word deliverable

Everything captured across the previous tabs, assembled into a client-ready document in one click.

SR 7.4 Control system recovery and reconstitution	2	High priority	OBS-08, POS-02
2-4 SP.07 Remote access	1	High priority	FND-02
2-4 SP.11 Patch management	1	High priority	OBS-07
2-4 SP.12 Backup / restore	1	High priority	OBS-08
SR 1.1 Human user identification and authentication	1	Moderate	OBS-10
SR 1.13 Access via untrusted networks	1	High priority	FND-02
SR 1.6 Wireless access management	1	Moderate	FND-03
SR 2.1 Authorization enforcement	1	Informational	OBS-11
SR 2.6 Remote session termination	1	High priority	FND-02
SR 2.8 Auditable events	1	Moderate	OBS-12
SR 4.1 Information confidentiality	1	Moderate	OBS-09
SR 5.4 Application partitioning	1	High priority	OBS-05
SR 6.2 Continuous monitoring	1	Moderate	OBS-12

Assessment report

Prepared for

Prepared by

Report title

Banner

Sanitize MACs

Client / site owner

Assessor name, role

OT / ICS Cybersecurity and Site Ass

DRAFT — FOR ASSESSOR REVIEW

No

Generates a .docx from the evidence currently in the database: cover, document control, executive readout, coverage, inventory, communications, auto-drafted observations, roadmap and appendices. Every observation is a draft that requires assessor validation.

Evidence package

One zip with the assessment JSON, the Word report (using the fields above), every CSV and the diagram, the raw PCAP of every live session, and a MANIFEST .txt listing every file with its SHA-256 — verify later with sha256sum -c SHA256SUMS. This is what to keep with the engagement record.

Export evidence package (zip)

Evidence exports

Assessment JSONAssets CSVRelationships CSVDiscovery CSVFlows CSV

The JSON export carries everything the report uses (sessions, assets, relationships, sites, findings, zones) and can be re-rendered offline with python3 -m ot_scout.report assessment.json report.docx.

Purdue diagram SVG

Reset

Deletes every session, asset, relationship, site, finding and conduit decision in the current data set. The IEEE vendor table is kept.

Clear prototype data

- 1

One-click Word report

Cover, executive readout with the exposure ranking, coverage by leg, inventory and fleet view, zones, OPC UA posture, the findings register with 62443/ATT&CK references, roadmap.
- 2

Evidence package with SHA-256 manifest

One zip: the JSON, the report, every CSV and diagram, the raw PCAP of every session, and a manifest to verify with sha256sum. What you hand over when a result is challenged.
- 3

Client-ready cover fields

Prepared-for, prepared-by and banner text are set once and stamped across the document — including a draft-review banner until the assessor signs off.

Scout Assist — analysis over the evidence, never a source of it

An assistant for the assessor that reads the assessment's own evidence and is checked against it.

OT Scout Passive Assessment Prototype v0.14.0 DEMO DATA Back to my data Stopped 0:00 Settings Assessment guide About

Passive by default. Discovery results are evidence, not proof of complete coverage. Inactive, encrypted, non-IP and unmonitored devices require drawings, customer records and physical walkdowns.

Collect Sites Inventory Communications Zones Findings Report **Scout Assist**

27 physical assets 27 identities 21 relationships 17 findings 2 sessions Mixed visibility

Ask Scout Assist

Scout Assist analyzes the evidence collected during the assessment to help identify relationships, gaps, and areas requiring human validation. It does not add evidence or make final assessment decisions. Every answer checked the evidence ids it used and is checked: anything it cites that OT Scout did not supply is flagged.

Which observed relationships should I investigate first? Which assets appear to communicate outside their expected Purdue zone? Which observed devices are missing from the documented inventory?

What should I ask the controls engineer based on this assessment? Identify the three most important areas requiring human validation. Draft a potential finding for the most significant undocumented or unexpected routed relationship.

What evidence would I need before making the most significant unexpected relationship a formal finding? Summarize this environment for an executive audience.

Which observed relationships should I investigate first?

Ask

► Earlier answers this session

1 Eight standard questions, or your own

"Which relationships should I investigate first?", "what would I need before making #3 a finding?". Answers come back in a fixed structure: observed, analysis, concerns, alternative explanations, validate on site, insufficient evidence.

2 Grounded and checked

Every claim cites an evidence id; anything cited that OT Scout did not supply is flagged in red. It cannot add evidence, change a decision or write to the register unreviewed — its drafts go through the same validation as any other.

3 Local or cloud — the client chooses

Settings holds the model connection: Anthropic or OpenAI in the cloud, or Ollama / llama.cpp on the laptop so evidence never leaves the box. The key stays on the assessment machine and never enters an export.

From raw traffic to a finished assessment

Collect → Sites → Inventory → Communications → Zones → Findings → Report → Scout Assist — eight tabs, one continuous evidence trail, a Word report your team can hand to a client, and a hashed evidence package behind it.

Passive by design

Evidence-backed, never asserted

Mapped to IEC 62443 & ATT&CK

Sample data shown throughout is entirely fictitious, for illustration only.