


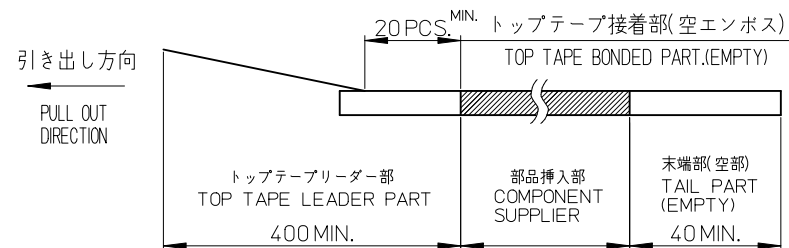
30.5	29.3	25.65	24.5	54132-5062	50
28.0	26.8	23.15	22.0	54132-4562	45
27.0	25.8	22.15	21.0	54132-4362	43
25.5	24.3	20.65	19.5	54132-4062	40
24.5	23.3	19.65	18.5	54132-3862	38
23.5	22.3	18.65	17.5	54132-3662	36
23.0	21.8	18.15	17.0	54132-3562	35
22.5	21.3	17.65	16.5	54132-3462	34
22.0	20.8	17.15	16.0	54132-3362	33
21.5	20.3	16.65	15.5	54132-3262	32
20.5	19.3	15.65	14.5	54132-3062	30
D	C	B	A	EMBOSSED TAPE ORDER No. オーダー番号	CKT.

CONNECTOR SERIES NO. : 54132-**68


REVISED EC NO. J2011-0041 DRWN:HYOSHINO 2010/07/08 CHKD:HIJIMA 2010/07/08 APPR:KMORIKAWA 2010/07/16	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY M.UMEDA	DATE 2004/09/27	TITLE 0.5 FPC CONN. ZIF SMT R/A BOTTOM CONTACT NI-BARRIER GOLD PLATING			
		10 OVER 30 UNDER	± 0.25	CHECKED BY K.TOYODA	DATE 2004/09/27				
		30 OVER	± 0.3	APPROVED BY N.UKITA	DATE 2004/09/27				MOLEX INCORPORATED
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-54132-064			1 OF 2
REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							



NOTE




- 1.梱包数量 : 1500個/リール
NUMBER OF CONNECTORS : 1500PCS/REEL
2.リードテープ長さ
LEAD TAPE LENGTH



- 3.カバーテープの はく離強度については、IEC60286-3に準拠
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.
4.材料 キャリアテープ : ポリプロピレン(PP)
トップテープ : PET,PE,PEF
リール : ポリスチレン(PS) <リサイクル材を含む>
MATERIAL CARRIER TAPE : POLYPROPYLENE
TOP TAPE: PET,PE,PEF
REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>
5.ELV & RoHS適合品
ELV AND RoHS COMPLIANT

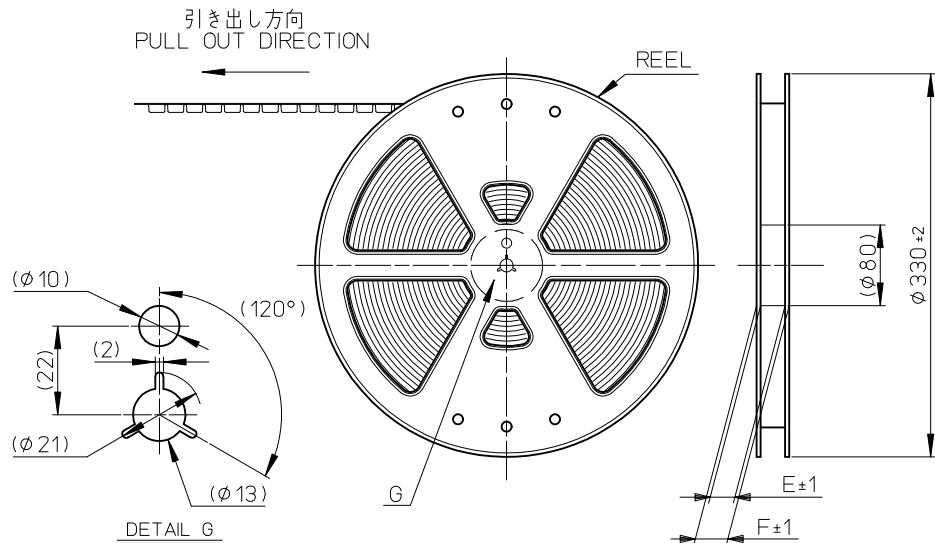

RELEASED EC NO: J2011-0041 2010/07/13 DRWN:HYOSHINO 2010/07/13 CHKD:HIJIMA 2010/07/16 APPR:KMORIKAWA 2010/07/16 REV 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± ---	DRAWN BY HYOSHINO	DATE 2010/07/13	TITLE 0.5 FPC CONN. ZIF SMT R/A BOTTOM CONTACT TAPING PACKAGE			
		10 OVER 30 UNDER	± ---	CHECKED BY HIJIMA	DATE 2010/07/13				
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2010/07/16	 MOLEX INCORPORATED			
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET		SD-54132-065		1 OF 2		
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

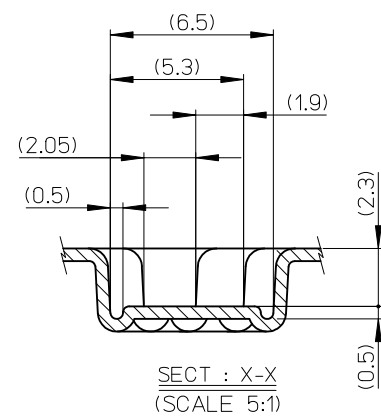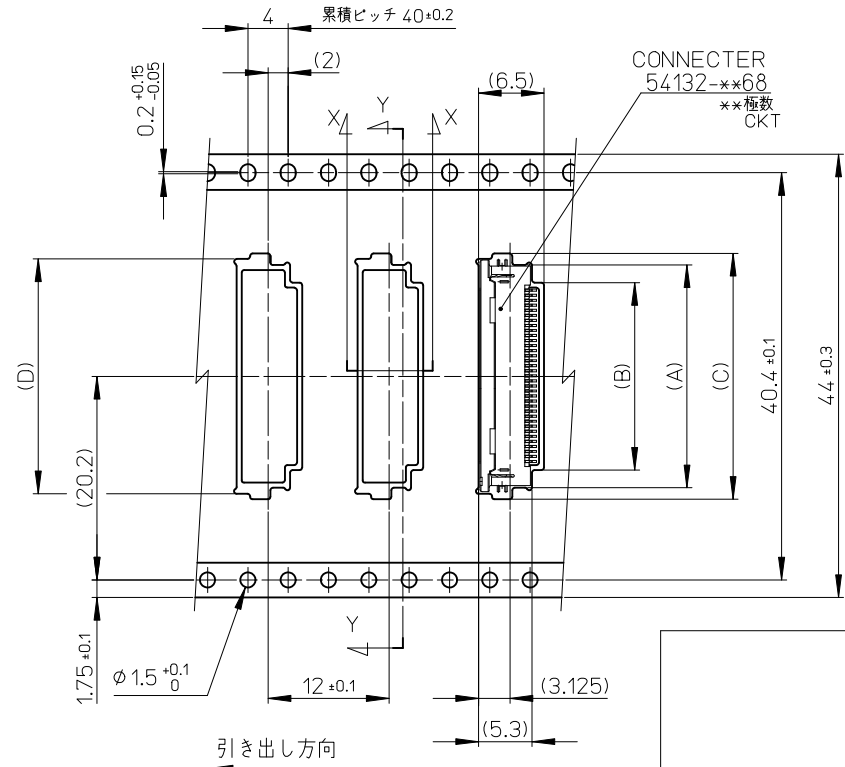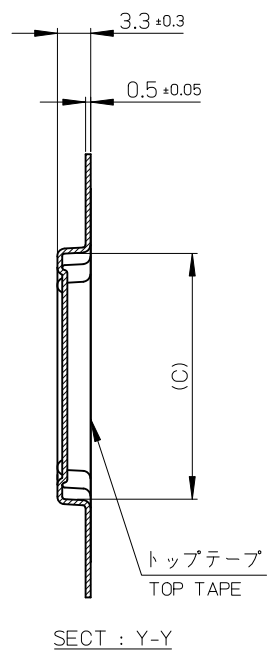

44	49.4	45.4	30.8	31.9	26.1	29.6	54132-5062	50
			28.3	29.4	23.6	27.1	54132-4562	45
			27.3	28.4	22.6	26.1	54132-4362	43
			25.8	26.9	21.1	24.6	54132-4062	40
			24.8	25.9	20.1	23.6	54132-3862	38
			23.8	24.9	19.1	22.6	54132-3662	36
			23.3	24.4	18.6	22.1	54132-3562	35
			22.8	23.9	18.1	21.6	54132-3462	34
			22.3	23.4	17.6	21.1	54132-3362	33
			21.8	22.9	17.1	20.6	54132-3262	32
			20.8	21.9	16.1	19.6	54132-3062	30
キャリアテープ幅 CARRIR TAPE WIDTH	F	E	D	C	B	A	MATERIAL NO. (EMBOSS PKG)	CKT.

RELEASED EC NO: J2011-0041 DRWN:HYOSHINO 2010/07/13 CHKD:HIJIMA 2010/07/13 APPR:KMORIKAWA 2010/07/16 O	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION							
		10 UNDER	± ---	DRAWN BY HYOSHINO	DATE 2010/07/13	TITLE 0.5 FPC CONN. ZIF SMT R/A BOTTOM CONTACT TAPING PACKAGE MOLEX INCORPORATED SD-54132-065									
		10 OVER 30 UNDER	± ---	CHECKED BY HIJIMA	DATE 2010/07/13										
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2010/07/16										
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.	SHEET NO.								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET		2 OF 2									
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										