
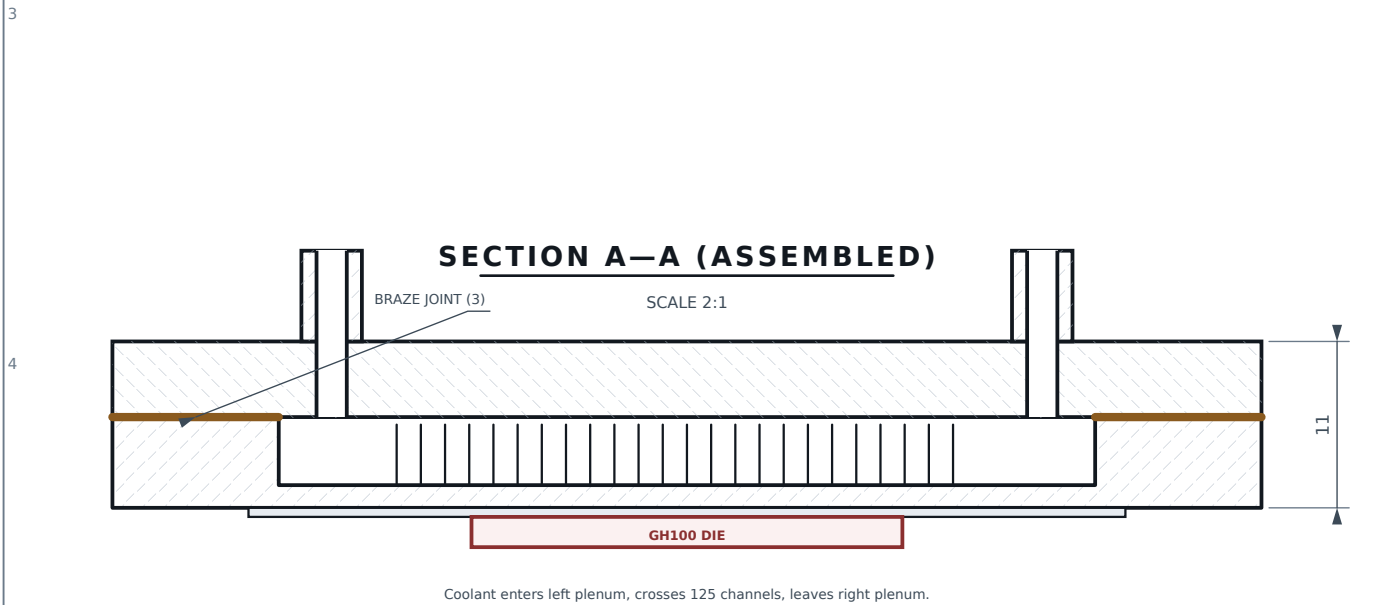


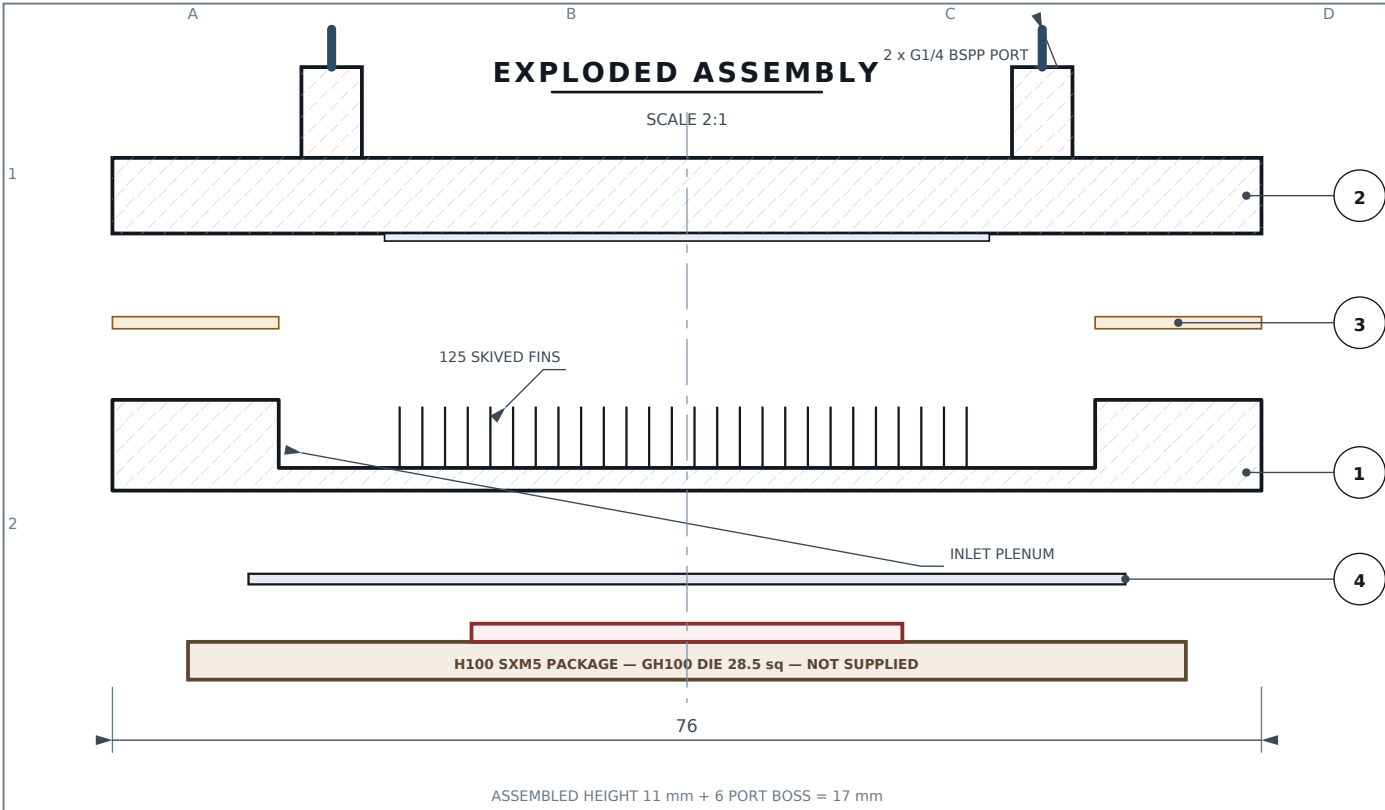


- GENERAL NOTES
- Interpret per ISO 128. Tolerances ISO 2768-mK unless stated. Dimensions in mm.
 - EVERY WETTED PART IS COPPER OR STAINLESS. No aluminium anywhere in the loop — a Cu/Al couple in glycol corrodes the aluminium out within months.
 - Cover is vacuum brazed to the body: no elastomer inside the loop, no serviceable joint. Replace, do not open.
 - SXM5 interface dimensions and mounting preload on sheet 5 are ASSUMED. Confirm against NVIDIA's mechanical specification before manufacture.

BILL OF MATERIALS — ASSEMBLY CP-100					
ITEM	QTY	PART No.	DESCRIPTION	MATERIAL	NOTE
1	1	CP-101	COLD PLATE BODY, SKIVED FIN	Cu C10200 / C1020	sheet 2
2	1	CP-102	COVER / MANIFOLD, 2 PORTS	Cu C10200 / C1020	sheet 3
3	1	CP-103	BRAZE PREFORM, PERIMETER RING	BCuP-5 (Ag 15%)	0.10 foil
4	1	CP-104	THERMAL INTERFACE, BARE DIE	PTM, k >= 13 W/mK	60 um BLT
5	4	CP-201	SPRING SCREW + BELLEVILLE STACK	A2-70 / 17-7PH	sheet 5
6	2	CP-202	QUICK DISCONNECT, DRIP-FREE	Ni-plated brass	loop side

RESISTANCE BUDGET — PG25, 1.5 L/min			
PATH	K/W	dT @ 700 W	SHARE
coolant (convection + sensible)	0.0141	9.9 K	48 %
TIM, bare die 60 um k=13	0.0057	4.0 K	19 %
spreading, die to fin field	0.0050	3.5 K	17 %
base 1.5 mm Cu	0.0047	3.3 K	16 %
TOTAL, die to coolant inlet	0.0295	20.7 K	100 %

DIE TEMPERATURE — SAME PLATE, 1.5 L/min			
COOLANT IN	H100 700 W	B200 1000 W	GB200 1200 W
32 C	53 C	62 C	67 C
40 C	61 C	70 C	75 C
45 C	66 C	75 C	80 C
50 C	71 C	80 C	85 C

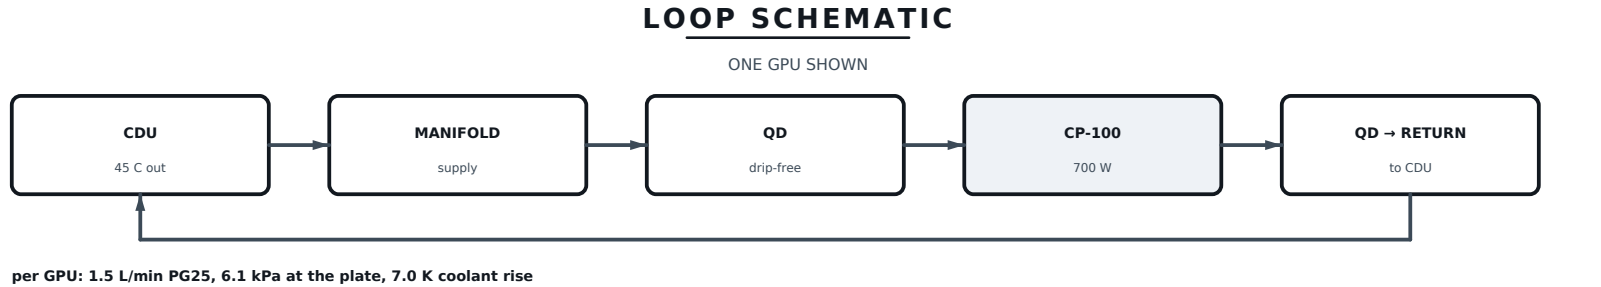

INDIA-VC THERMAL HARDWARE					ISO 128 / ISO 2768-mK	
TITLE D2C COLD PLATE — GENERAL ASSEMBLY H100 SXM5 / 700 W / Cu C10200, VACUUM BRAZED / PG25 1.5 L/min				SCALE 2:1		UNITS mm
				THIRD ANGLE PROJECTION		
DRAWING No. CP-100				REV A	SHEET 1 / 6	
DRAWN AI-ASSISTED DRAFT	CHECKED — PENDING —	MATERIAL SEE BOM	FINISH SEE NOTES	DATE 2026-09-10		