PLAN — POCKET SIDE UP

SCALE 10:1

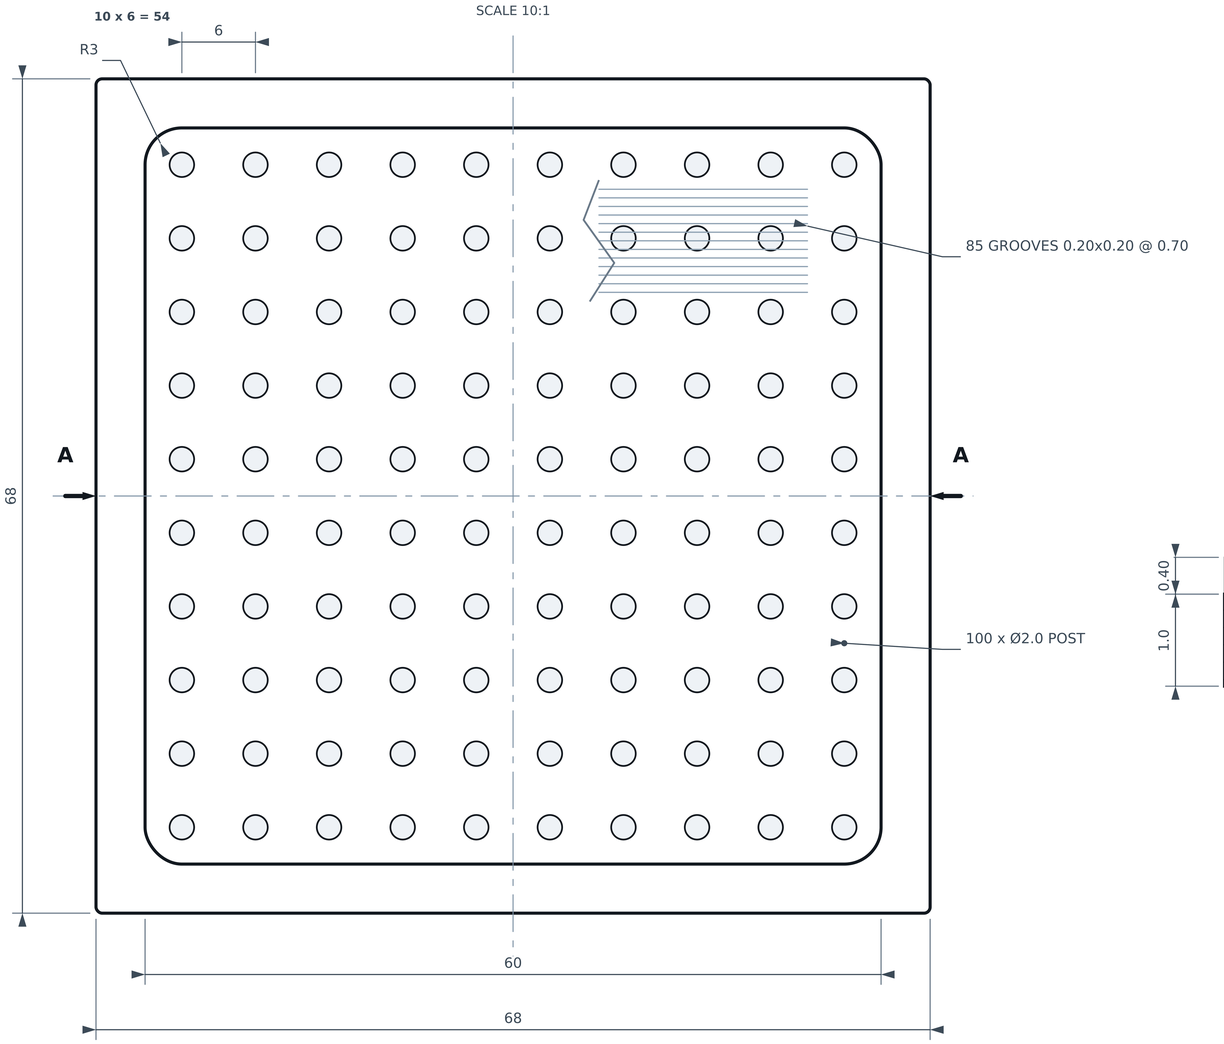

SECTION A—A

SCALE 10:1



DETAIL B

SCALE 75:1

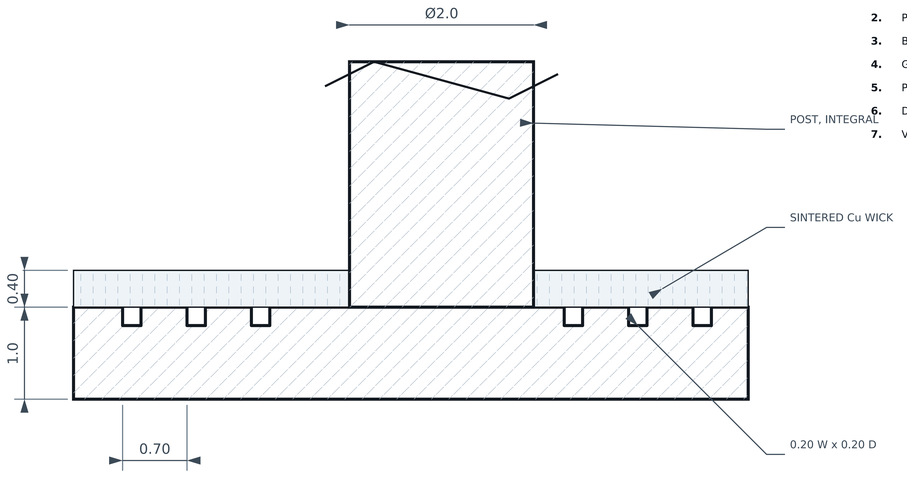

DETAIL C — RIM BOND LAND

SCALE 50:1

Bond area 4.0 x 4 sides = 1024 mm². Burst margin > 16 at 150 C.

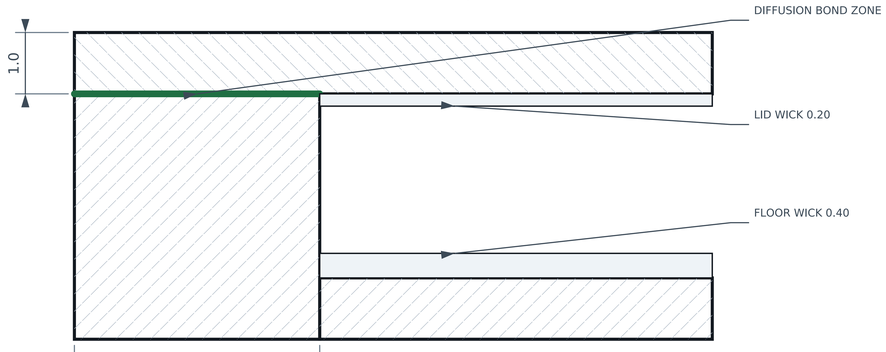

NOTES

1. MATL: OXYGEN-FREE copper C10200 / JIS C1020, annealed. Tough-pitch copper (C11000 / JIS C1100) is PROHIBITED: it embrittles in the 950 C hydrogen sinter.
2. Posts integral with base — machine from solid or coin.
3. Bond faces (rim + post tops): flatness 0.02, Ra 0.4 max.
4. Grooves run ONE direction only, interrupted at posts.
5. Post top faces coplanar with rim within 0.015.
6. Deburr 0.1 max. No burrs into cavity.
7. Vacuum degrease + acid pickle before sintering.

CRITICAL CHARACTERISTICS

FEATURE	NOMINAL	TOL	CRITICAL TO
Floor thickness	1.0	+0.05 / -0.00	evaporator R th
Post height = pocket depth	3.0	±0.015	lid bond / burst
Rim + post-top flatness	—	0.02	hermeticity
Groove depth	0.20	±0.03	capillary return
Bond face roughness	Ra 0.4	max	diffusion bond
Post position	true position	Ø0.10 MMC	lid land alignment

INDIA-VC THERMAL HARDWARE — ISO 128 / ISO 2768-mK

TITLE: **CHAMBER BASE** — Cu C10200 OFHC (JIS C1020) / 68 x 68 x 4.0 / 100 INTEGRAL POSTS	SCALE: **10:1** THIRD ANGLE PROJECTION	UNITS: **mm**		
DRAWING No.: **VC-101**	REV: **A**	SHEET: **2 / 7**		
DRAWN: AI-ASSISTED DRAFT	CHECKED: — PENDING —	MATERIAL: SEE BOM	FINISH: SEE NOTES	DATE: 2026-09-09