


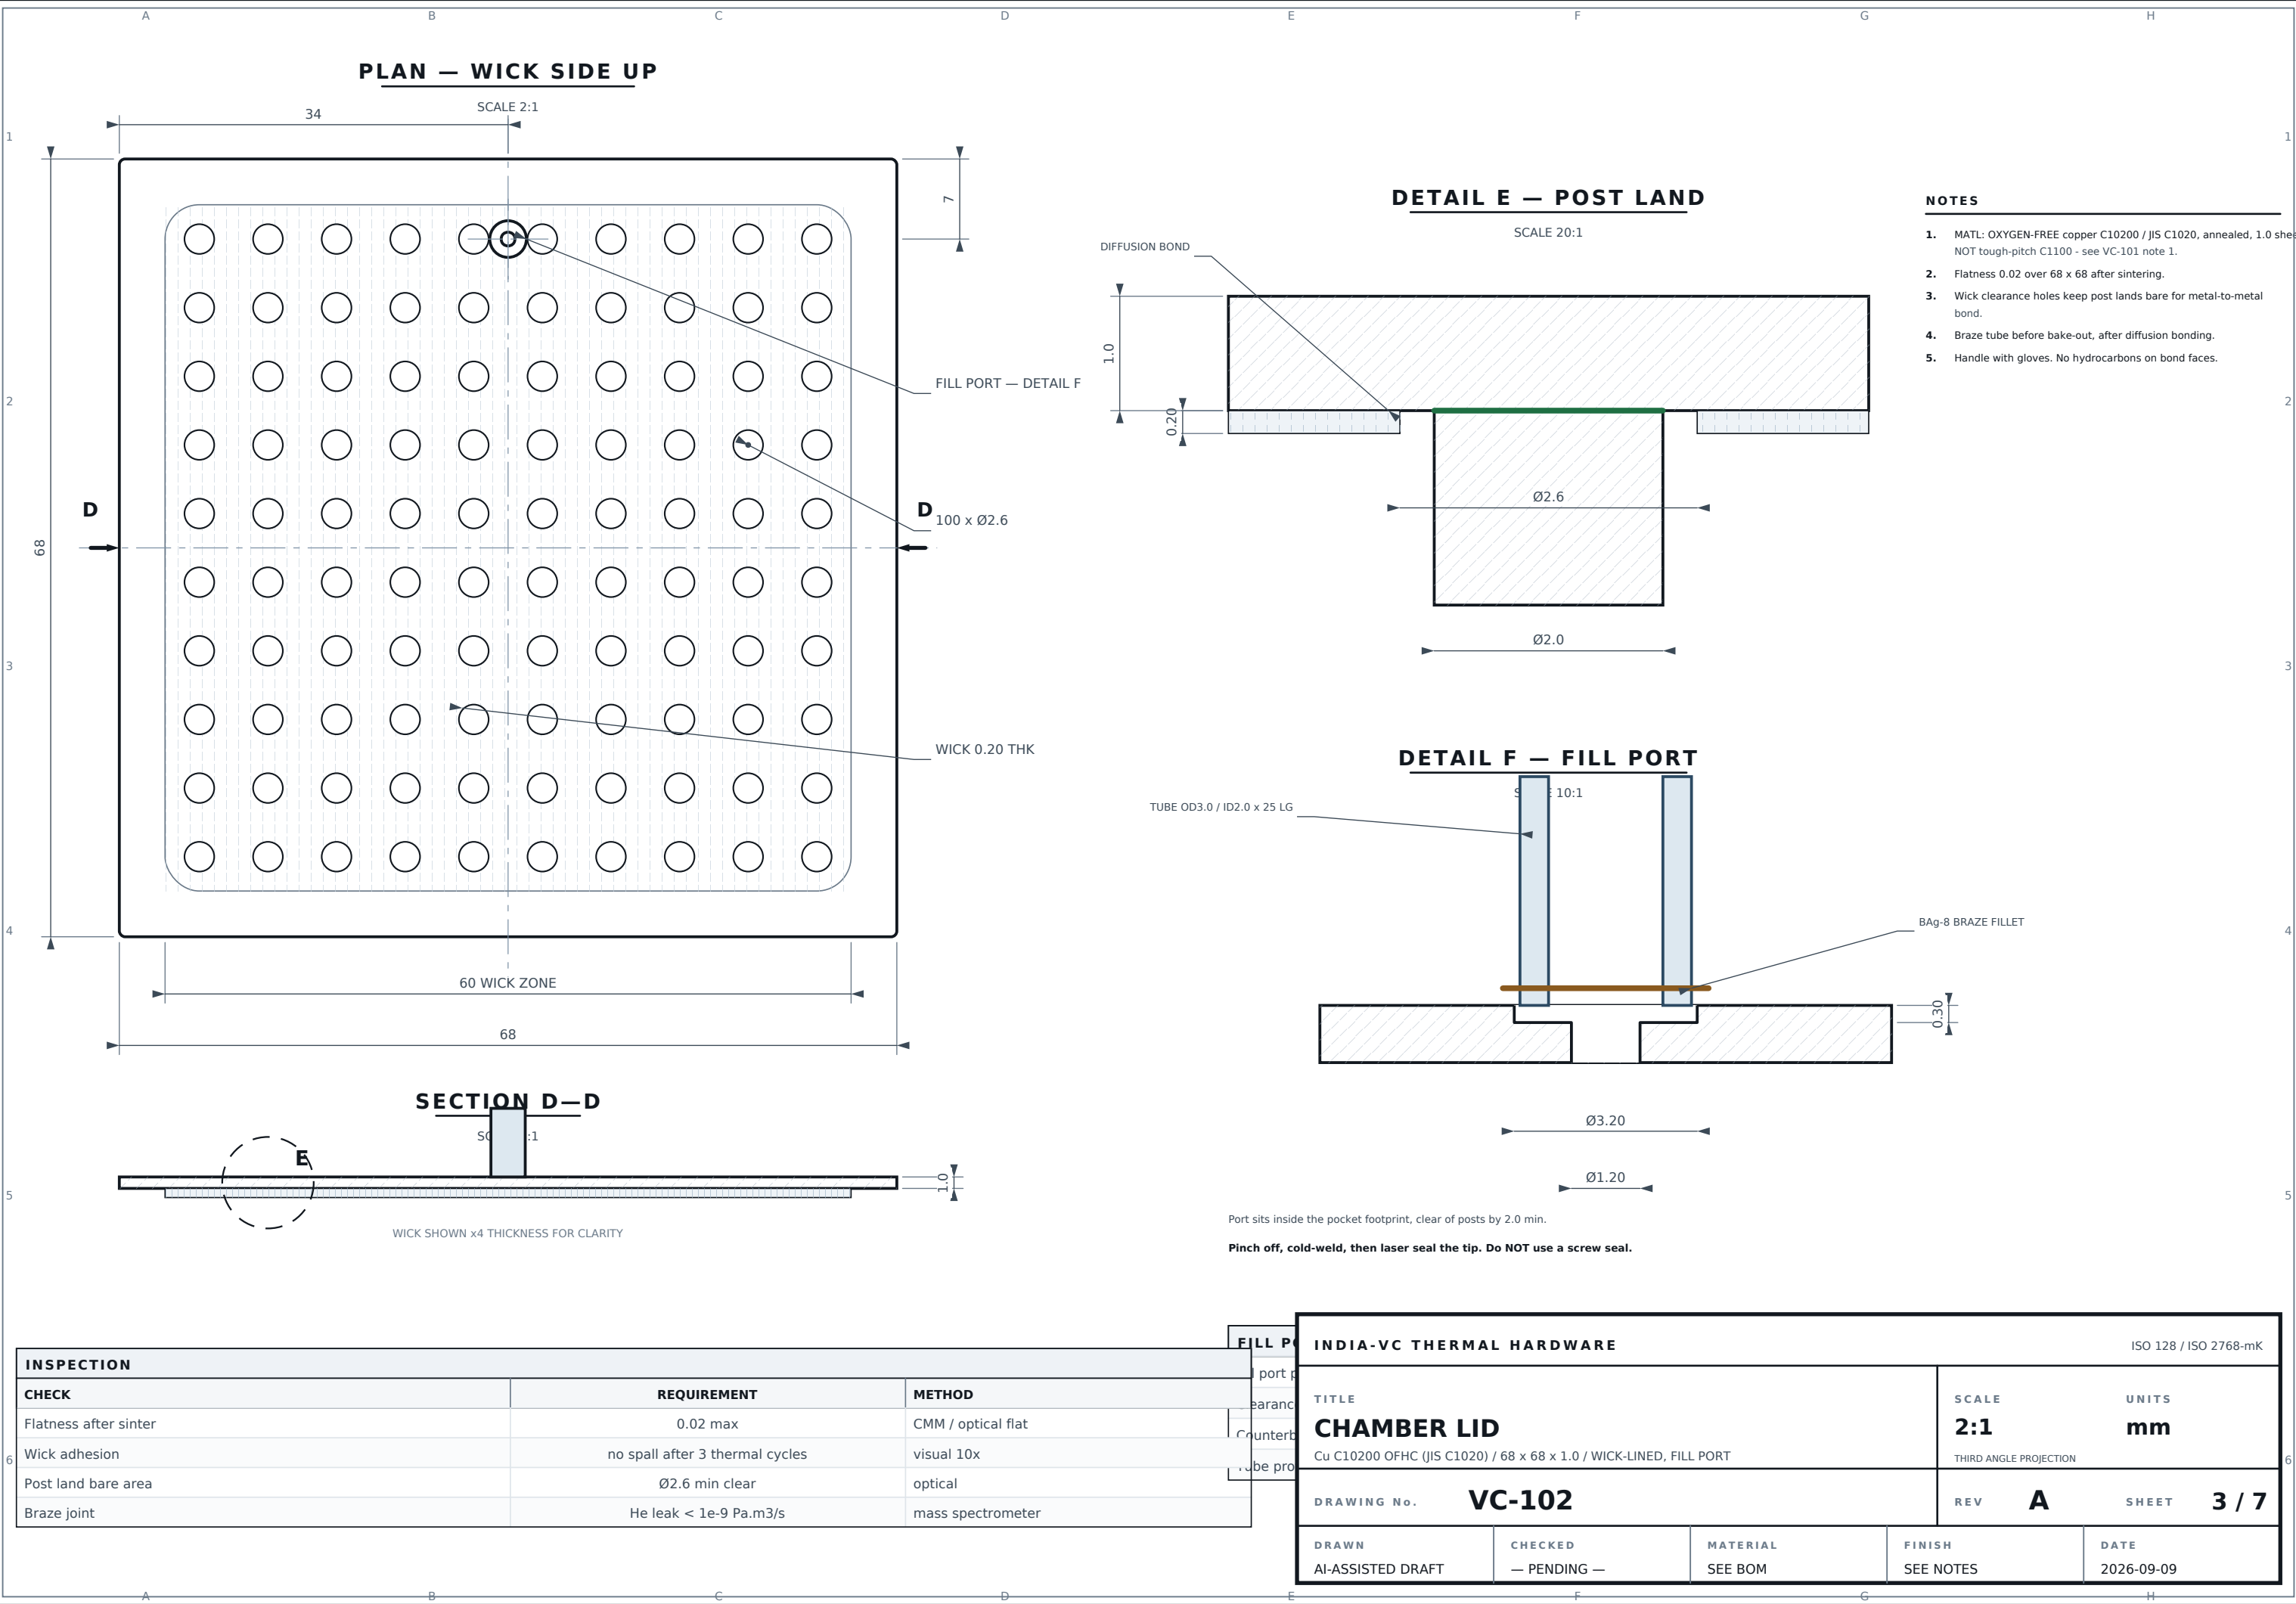

| INSPECTION            |                                 |                    |
|-----------------------|---------------------------------|--------------------|
| CHECK                 | REQUIREMENT                     | METHOD             |
| Flatness after sinter | 0.02 max                        | CMM / optical flat |
| Wick adhesion         | no spall after 3 thermal cycles | visual 10x         |
| Post land bare area   | Ø2.6 min clear                  | optical            |
| Braze joint           | He leak < 1e-9 Pa.m3/s          | mass spectrometer  |

| INDIA-VC THERMAL HARDWARE                                          |             |          |                        | ISO 128 / ISO 2768-mK |             |
|--------------------------------------------------------------------|-------------|----------|------------------------|-----------------------|-------------|
| TITLE                                                              |             |          | SCALE                  |                       | UNITS       |
| CHAMBER LID                                                        |             |          | 2:1                    |                       | mm          |
| Cu C10200 OFHC (JIS C1020) / 68 x 68 x 1.0 / WICK-LINED, FILL PORT |             |          | THIRD ANGLE PROJECTION |                       |             |
| DRAWING No. VC-102                                                 |             |          | REV                    | A                     | SHEET 3 / 7 |
| DRAWN                                                              | CHECKED     | MATERIAL | FINISH                 | DATE                  |             |
| AI-ASSISTED DRAFT                                                  | — PENDING — | SEE BOM  | SEE NOTES              | 2026-09-09            |             |