


USB-C USB2.0 Flash / Power

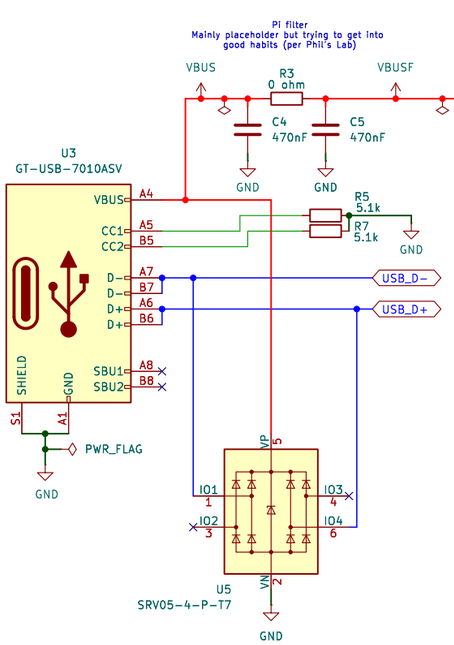


Current Monitor I2C (Powerbank State of Charge)

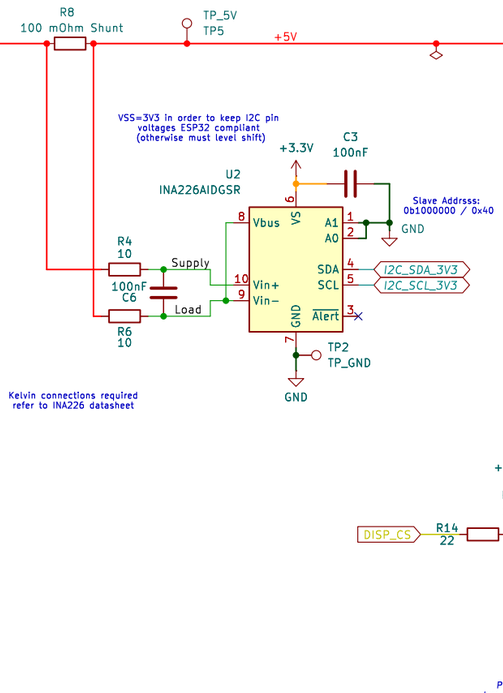


Power Regulation

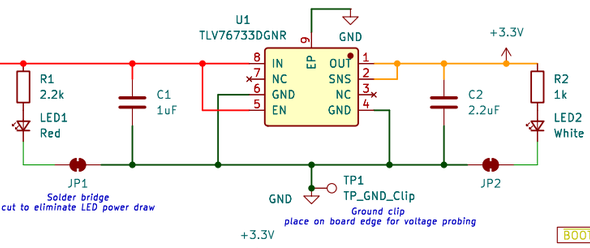


Microcontroller

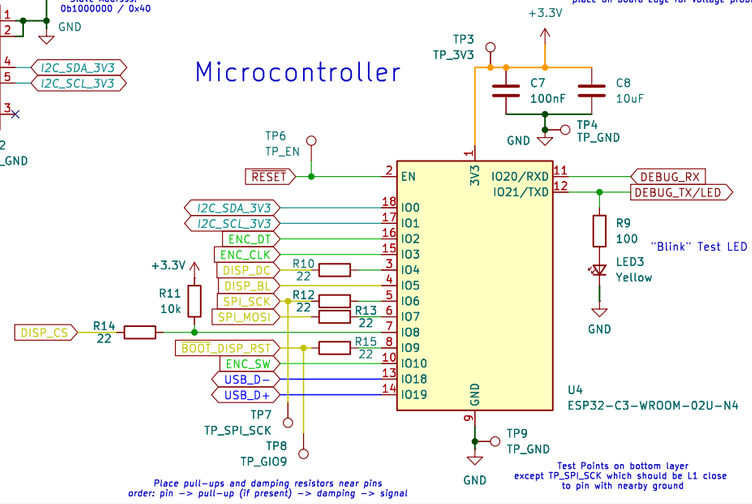


User Interface Display / Rotary Encoder-Switch

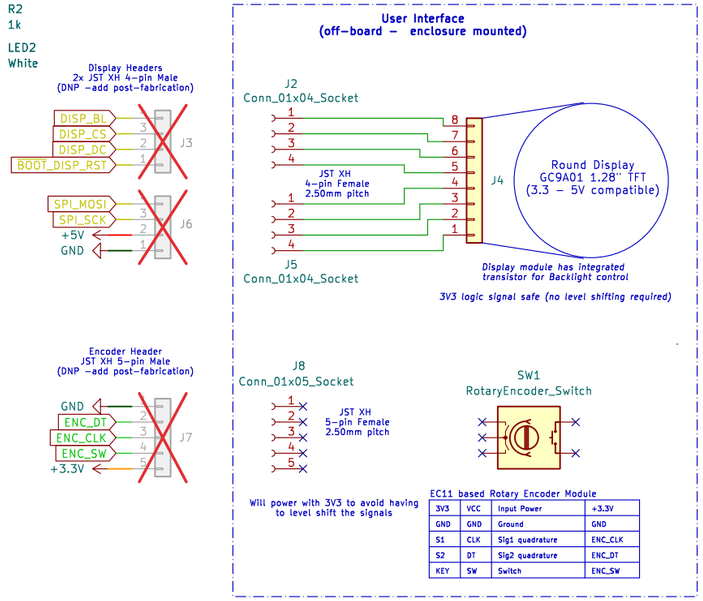


Thermistors Bias / Low Pass Filter (16 Hz)

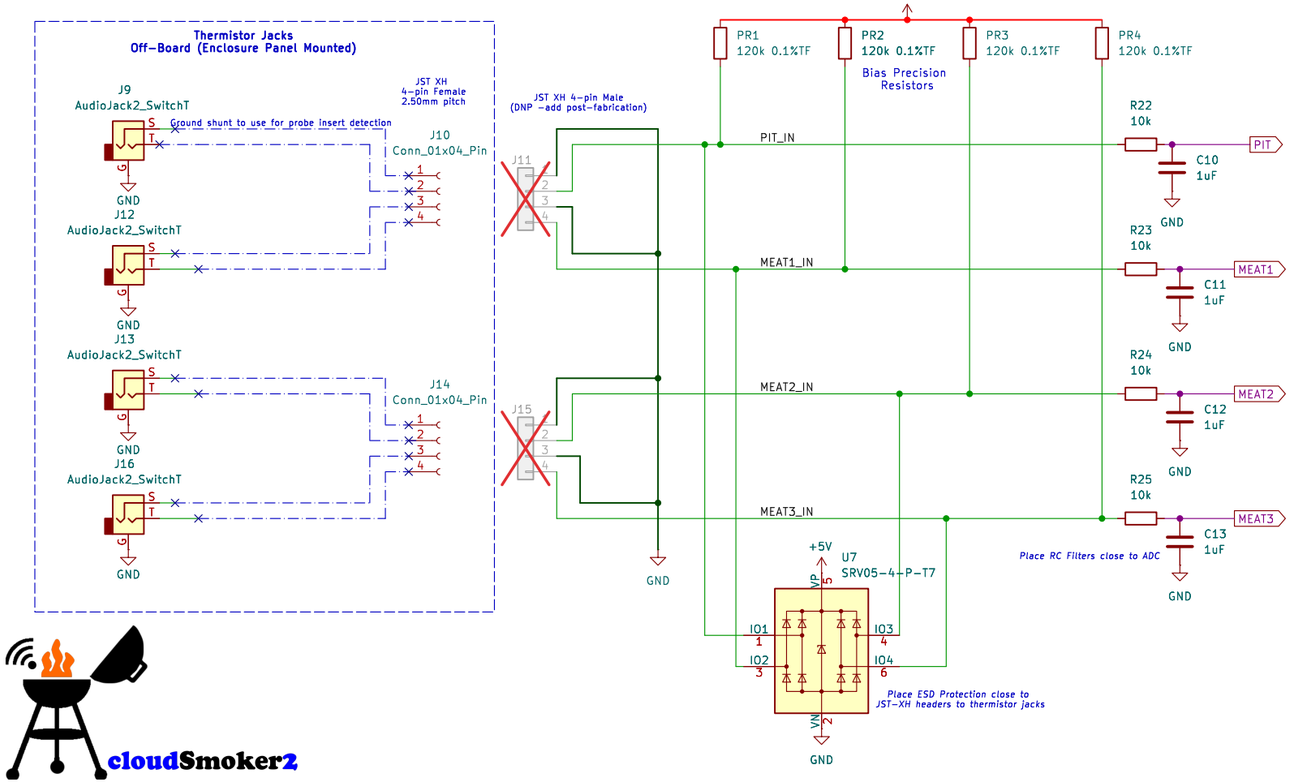


Logic Level Shifters Bidirectional 5V <-> 3V3

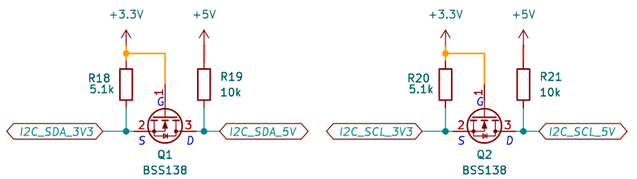

Switches

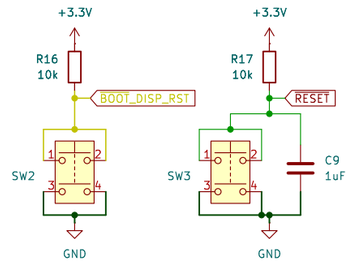


ADC 16-bit I2C

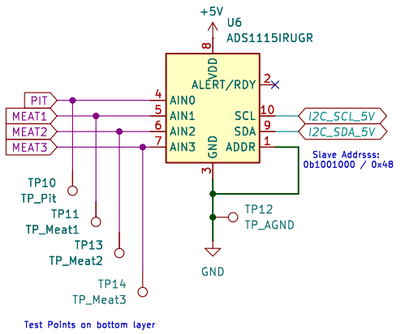


Note: During actual board assembly, 9.1k ohm resistors were substituted for the nine 10k ohm resistors due to design values being out of stock.

Immaterial impacts:
1) RC filter shifts from 16 to 17 Hz
2) Pull-ups slightly stronger

UART Header (debug)



Mechanical



cloudSmoker2

Copyright © 2026 C. Greenstreet.
Licensed under Creative Commons
BY-NC-SA 4.0 International

open source hardware

Sheet: /
File: cloudSmoker_ver2f.kicad_sch

Title: cloudSmoker_ver2

Size: A3	Date: 2026-06-16	Rev: 2f
KiCad E.D.A. 9.0.9		Id: 1/1