THE UNIVERSITY OF CHICAGO

THE STATISTICAL MECHANICS OF TRANSCRIPTIONAL CONTROL

A THESIS SUBMITTED TO THE FACULTY OF THE DIVISION OF THE PHYSICAL SCIENCES IN CANDIDACY FOR THE DEGREE OF DOCTOR OF PHILOSOPHY

DEPARTMENT OF PHYSICS

BY CLAYTON W. SEITZ

CHICAGO, ILLINOIS SPRING 20XX

Copyright \bigcirc 2022 by Clayton W. Seitz All Rights Reserved

TABLE OF CONTENTS

Al	BSTRACT	iv
1	SINGLE MOLECULE LOCALIZATION MICROSCOPY	1 1 1 6
2	STATISTICAL MECHANICS OF GENE REGULATION	9
	2.1 Introduction	9
	2.2 Transcriptional bursts and chromatin architecture	9
	2.3 Transcriptional condensates: a phase separation model for transcriptional con-	
	trol	9
	2.4 Brief introduction to polymer dynamics	9
	2.5 Statistical mechanics of transcriptional condensates	9
	2.6 The chemical master equation and finite state projection	9
	2.6.1 Sequential tempered Markov Chain Monte Carlo	12
3	IFN- γ INDUCED TRANSCRIPTIONAL BURSTS	13
AI	PPENDICES	14
A	DERIVATION OF THE FOKKER PLANCK EQUATION	15
	A.0.1 Kramers-Moyal Expansion	15
	3.1 Poisson processes	18

ABSTRACT

Eukaryotic transcription is episodic, consisting of a series of transcriptional bursts, Bursty transcriptional dynamics are well-exemplified by the transient expression of pro-inflammatory guanylate binding proteins (GBPs) - a group interferon-inducible GTPases that restrict the replication of intracellular pathogens [XXX]. Classical models of gene regulation explain transcriptional bursts by invoking stochastic binding and unbinding of transcription factors, RNA polymerase and mediator proteins at enhancer or promoter sequences. However, more recent studies have pointed towards a more cooperative picture of transcriptional control where phase-separated aggregates of DNA, RNA, and proteins form higher-order structures to control gene expression. For example, both chromatin immunoprecipitation and super resolution imaging have captured the phase separation of super-enhancer-binding proteins MED1 and BRD4 in transcriptional condensates at the Essrb genomic locus [XXX]. Furthermore, fluorescence microscopy techniques have colocalized MED1 and BRD4 with the GBP gene cluster alongside a reduction in the degree of disorder of 3D chromatin structure in murine macrophages after infection with Mycobacterium tuberculosis. Taken together, these results suggest that phase separation may play a role in the reorganization of chromatin structure during trancriptional control of innate immune response genes [XXX]. Here, we hypothesize that phase separation reduces the entropy of chromatin structure in order to induce bursty gene expression. Using single molecule localization microscopy (SMLM) to obtain super-resolution images of the H2B protein, we intend to demonstrate simultaneous (i) loss of disorder in chromatin structure (ii) formation of transcriptional condensates containing MED1 and BRD4 and (iii) non-Poissonian gene expression. The following sections discuss recent the biological evidence in more detail and summarize the single molecule microscopy techniques and biophysical models we employ to study the interactions between transcriptional condensates and the chromatin scaffold.

CHAPTER 1

SINGLE MOLECULE LOCALIZATION MICROSCOPY

1.1 Point spread functions in single molecule localization microscopy

Gaussian approximation. Lateral and axial point spread functions, Potentially double helix point spread functions for 3D storm

Most detectors used for imaging have many elements (pixels) so that we can record an image projected onto the detector by a system of lenses. In fluorescence imaging, this is usually a relay consisting of an objective lens and a tube lens to focus the image onto the camera. Due to diffraction, any point emitter, such as a single fluorescent molecule, will be registered as a diffraction limited spot. The profile of that spot is often described as a Gaussian point spread function (Richardson and Wolf)


$$G(x,y) = \frac{1}{2\pi\sigma^2} e^{-\frac{(x-x_0)^2 + (y-y_0)^2}{2\sigma^2}} + B_0$$
 (1.1)


which has units of $[W/m^2]$.

1.1.1 The physics of semiconductor cameras


Modern cameras used in light microscopy, such as scientific complementary metal oxide semiconductor (sCMOS) cameras, are ultimately powered by the photoelectric effect. This occurs when electrons within the material absorb energy from the photons and have enough energy to escape their bonds and become ejected from the material. The materials used in camera sensors are typically semiconductors such as silicon or gallium

In essence, an image captured by a camera can be loosely thought of as histogram of photon arrivals and a discretized form of the density PSF(x, y) over an integration time τ .

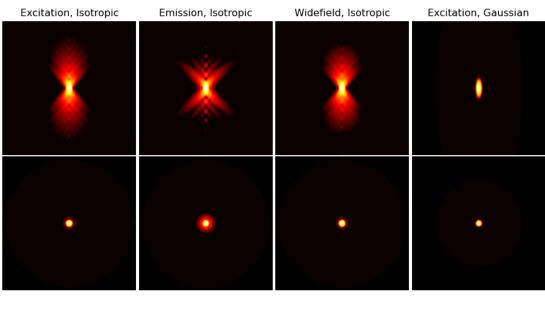

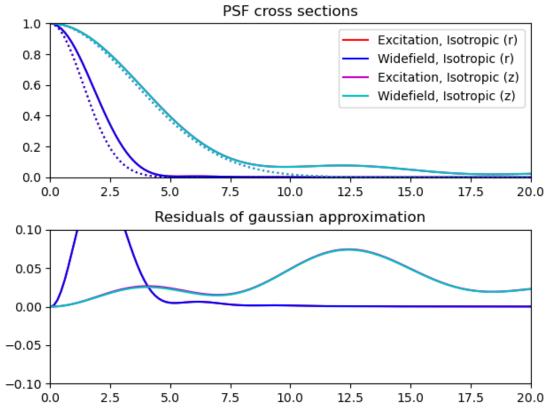


If PSF(x, y) can be approximated as constant in time, the value at a pixel approaches an integral of this density over the pixel:

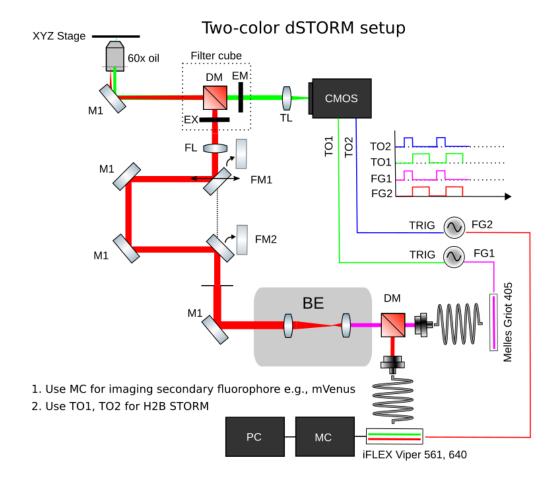

$$\mu_k = \lambda_k \tau = \frac{\eta \tau}{\hbar \omega} \int G(x, y) dA$$
 (1.2)

The parameter η is called the quantum efficiency, and without loss of generality, we will assume $\eta=1$. The variable λ_k at a pixel k defines the probability of observing a photon per unit time and the true signal is Poisson: $S_k \sim P(\lambda_k)$. In this model, notice that S_k may represent multiple sources e.g., fluorescence from a single molecule plus a background source as shown in (1.1). Furthermore, we say that the detection process is shot-noise limited when Poisson noise dominates. It would be convenient to obtain an analytical expression for λ_k given the parameters of the point spread function $\theta=(x_0,y_0,\sigma)$. Since the 2D Gaussian is symmetric, it is separable, and we can write

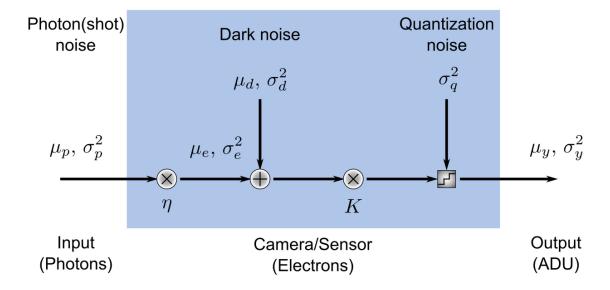

$$\lambda_k = \frac{1}{2\pi\sigma^2} \left(\int_{x_k}^{x_{k+1}} e^{-\frac{(x-x_0)^2}{2\sigma^2}} dx \right) \left(\int_{y_k}^{y_{k+1}} e^{-\frac{(y-y_0)^2}{2\sigma^2}} dy \right)$$

We can then express the Gaussian integrals over a pixel by making use of the following property of the error function

$$\frac{1}{\sqrt{2\pi}\sigma} \int_{a}^{b} e^{\frac{-(x-\mu)^{2}}{2\sigma^{2}}} = \frac{1}{2} \left(\operatorname{erf} \left(\frac{b-\mu}{\sqrt{2}\sigma} \right) - \operatorname{erf} \left(\frac{a-\mu}{\sqrt{2}\sigma} \right) \right)$$

Suppose the particle is known to be located at (x_0, y_0) and some square pixel k is centered on coordinates (x, y) and has a width a. Then λ_k at this pixel is

$$\lambda_k = \frac{1}{4} \left(\operatorname{erf} \left(\frac{x + a/2 - x_0}{\sqrt{2}\sigma} \right) - \operatorname{erf} \left(\frac{x - a/2 - x_0}{\sqrt{2}\sigma} \right) \right)$$
$$\cdot \left(\operatorname{erf} \left(\frac{y + a/2 - y_0}{\sqrt{2}\sigma} \right) - \operatorname{erf} \left(\frac{y - y/2 - y_0}{\sqrt{2}\sigma} \right) \right)$$

However this noise model is incomplete, because detectors often suffer from dark noise, which may refer to readout noise or dark current, and contributes to a nonzero signal even in the absence of incident light. Dark current is due to statistical fluctuations in the photoelectron count due to thermal fluctuations. Readout noise is introduced by the amplifier circuit during the coversion of photoelectron charge to a voltage. Here, we use the Hamamatsu ORCA v3 CMOS camera, which is air cooled to -10C and has very low dark current - around 0.06 electrons/pixel/second - and can be safely ignored for low exposure times. Readout noise has been often neglected in localization algorithms because its presence in EMCCD cameras is small enough that it can be ignored within the tolerances of the localization precision. In the case of sCMOS cameras, however, the readout noise of each pixel is significantly higher and, in addition, every pixel has its own noise and gain characteristic with dramatic pixel-to-pixel variations.

Readout noise is not negligible, and is represented as a random variable W_k which is a statistical fluctuation of the number of ADU during the amplification process. It is important to note that we cannot measure the contribution by readout noise W_k before amplification and therefore it must be expressed in units of ADU. This is in contrast to the Poisson variable S_k , which can be expressed in units of photoelectrons, because we are able to estimate the emission rate of the fluorophore analytically and we know the quantum efficiency η . The number of photoelectrons S_k is multiplied by a gain factor g_k which has units of $[ADU/e^-]$, which generally must be measured for each pixel. For W_k , the gain factor is implied. Here, we will always assume that readout noise is Gaussian with some pixel-specific offset o_k and variance σ_k^2 i.e. $W_k \sim \mathcal{N}(o_k, \sigma_k^2)$. Ultimately we write out distributions of the variable we observe H_k which has units of ADU and is a sum of shot noise and readout noise. A fundamental result in probability theory is that the distribution of H_k is the convolution of the distributions of S_k and W_k ,

$$\begin{split} P(H_k) &= P(S_k) \circledast P(W_k) \\ &= A \sum_{q=0}^{\infty} \frac{1}{q!} e^{-\mu_k} \mu_k^q \frac{1}{\sqrt{2\pi}\sigma_k} e^{-\frac{(H_k - g_k q - o_k)}{2\sigma_k^2}} \end{split}$$

In practice, this expression is difficult to work with, so we look for an analytical approximation. For sufficiently large μ_k , the Poisson distribution is well-approximated by a normal distribution $P(\mu_k) \approx \mathcal{N}(\mu_k, \mu_k)$. Under the conditions that this approximation is valid, $P(H_k)$ is easily calculated, because the sum of two Gaussian variables is another Gaussian variable:

$$P(H_k) \approx \mathcal{N}(\mu_k + o_k, \mu_k + \sigma_k^2)$$

1.1.2 Bayesian Inference of PSF parameters and the Cramer-Rao bound

Suppose we are given samples from a model distribution with unknown parameters. This model defines a joint likelihood of the samples at each point in θ space, formally the posterior $P(X|\theta)$. We may then ask - does the likelihood of the data vary as we vary the parameters? If the likelihood surface is flat, all parameter sets would be equally likely and the data does not appear to carry much information about the parameters. Perhaps our model is complete nonsense, and the data simply cant carry substantial information about the parameters. Moreover, if the surface has a number of bumps or inflection points, then we expect that maybe some parameter sets are more likely that others. Fisher information, relates this "bumpiness" of the likelihood surface to a precise metric of information carried by the data about the parameters, and is measured by computing the variance the second derivative of the log-likelihood over the parameter space

The log-likelihood of an image under parameters θ , assuming each pixel is an independent random variable, reads

$$\ell(H|\theta) = \log \prod_{k}^{M^2} P(H_k|\theta) = \sum_{k=1}^{M^2} \ell(H_k|\theta)$$

This is fairly simple when the likelihood is Gaussian

$$\ell(H|\theta) = \frac{1}{2} \sum_{k} \log 2\pi \sigma_k^2 + \frac{(H_k - \mu_k)^2}{\sigma_k^2}$$

and the Fisher information matrix is

$$I_{ij}(\theta) = \mathbb{E}\left(\frac{\partial \ell}{\partial \theta_i} \frac{\partial \ell}{\partial \theta_j}\right)$$

Maximum likelihood estimation is a special case of maximum a posteriori estimation where our prior on the parameter values is uniform.

$$\theta_{\text{MAP}}^* = \underset{\theta}{\operatorname{argmax}} P(\theta|\mathcal{X})$$
$$= \underset{\theta}{\operatorname{argmax}} \mathcal{L}(\theta|\mathcal{X})\pi(\theta)$$

where \mathcal{L} denotes the likelihood function (posterior probability of the parameters) and $\pi(\theta)$ a prior on the parameters. Under the constraint that $\pi(\theta)$ is a uniform distribution, we are dealing with maximum likelihood estimation

$$\begin{aligned} \theta_{\text{MLE}}^* &= \underset{\theta}{\operatorname{argmax}} \ \mathcal{L}(\theta|\mathcal{X}) \\ &= \underset{\theta}{\operatorname{argmin}} \ - \ell(\theta|\mathcal{X}) \end{aligned}$$

where ℓ is the log-likelihood.

We can now return to the original optimization problem

$$\theta_{\text{MAP}}^* = \underset{\theta}{\operatorname{argmax}} \ \pi(\theta) \mathcal{L}_{\theta}$$

$$= \underset{\theta}{\operatorname{argmax}} \ \prod_{k} \mathcal{L}_{\theta,k}$$

$$= \underset{\theta}{\operatorname{argmax}} \ \sum_{k} \log \mathcal{L}_{\theta,k}$$

CHAPTER 2

STATISTICAL MECHANICS OF GENE REGULATION

2.1 Introduction

- 2.2 Transcriptional bursts and chromatin architecture
- 2.3 Transcriptional condensates: a phase separation model for transcriptional control

Heavily influenced by Young's group at MIT

- 2.4 Brief introduction to polymer dynamics
- 2.5 Statistical mechanics of transcriptional condensates
- 2.6 The chemical master equation and finite state projection

The central assumption underlying a Markov process, is the memoryless property

$$P(X_t|X_{t-1},X_{t-2},...,X_{t-N}) = P(X_t|X_{t-1})$$

A single Markov chain is the set of states $X = \{X_1, X_2, ..., X_N\}$. Such a set can be generated provided that $P(X_t|X_{t-1})$ is known. To capture $P(X_t|X_{t-1})$ for all possible pairs X_t and X_{t-1} , we define a square transition matrix $T \in \mathbb{R}^{N \times N}$ where $N = |\Omega|$. As such, the elements of T represent the probability of a transition from a state ω_j to ω_i in a unit time

$$T_{ij} = \Pr\left(X_t = \omega_i, | X_{t-1} = \omega_j\right)$$

Under these definitions, the row T_i represents the present time, and is a conditional probability distribution $P(\omega|X_{t-1}=\omega_j)$ which requires that

$$\sum_{j} T_{ij} = \sum_{j} P(X_t = \omega_j | X_{t-1} = \omega_i) = 1$$

The matrix T is not necessarily symmetric $T_{ij} \neq T_{ji}$. One should note that the columns T_j do not define a probability distribution $P(X_t = \omega_i | X_{t-1} = \omega_j)$ and therefore do not necessarily sum to unity. The probability $P(X_t = \omega_i | X_{t-1} = \omega_j)$ has no meaning in this context, since we have defined the rows to represent a probability of the future given the present. We simply sample $X_t \sim P(X_t = \omega_j | X_{t-1} = \omega_i)$, assign i = j, and repeat. It directly follows from the fundamental rules of probability, the first order dynamics for a particular state ω_i : $P(\omega_i, t)$ is given by

$$P(\omega_i, t + dt) = P(\omega_i, t) + \mathcal{J}_i dt$$
(2.1)

The net probability current \mathcal{J}_i must be

$$\mathcal{J}_{i} = \sum_{i} T_{ij} P(\omega_{j}, t) - \sum_{i} T_{ij} P(\omega_{i}, t)$$

The first is a sum on a column and the second a sum on a row. This can be simplified further by noticing that the normalization condition implies

$$T_{ij} = 1 - \sum_{j} T_{ij} (1 - \delta_{ij})$$
$$= 1 - \sum_{j} T_{ij} + \sum_{j} T_{ij} \delta_{ij}$$

$$\begin{split} \mathcal{J}_i &= \sum_i T_{ij} P(\omega_j, t) - \sum_j T_{ij} P(\omega_i, t) \\ &= \sum_i \left(1 - \sum_j T_{ij} + \sum_j T_{ij} \delta_{ij} \right) P(\omega_j, t) - \sum_j T_{ij} P(\omega_i, t) \\ &= |\Omega| - |\Omega| + \sum_i \sum_j T_{ij} P(\omega_j, t) \delta_{ij} - \sum_j T_{ij} P(\omega_i, t) \\ &= \sum_j T_{ji} P(\omega_j, t) - T_{ij} P(\omega_i, t) \end{split}$$

Notice that the Kronecker delta effectively just swaps the index. Taking the limit of (1.1), we arrive at the **master equation**

$$\frac{\partial P(\omega_i)}{\partial t} = \sum_{j} T_{ji} P(\omega_j, t) - T_{ij} P(\omega_i, t)$$

It is common to then define an operator \boldsymbol{W} s.t. $W_{ij} = T_{ij}$ and $W_{ii} = -\sum_{j} T_{ij}$

$$\frac{dP(\omega_i)}{dt} = \sum_j W_{ij}P(\omega_j) \to \frac{dP(\boldsymbol{\omega})}{dt} = \mathcal{J}(\boldsymbol{\omega}) = \mathbf{W}P(\boldsymbol{\omega})$$

This operator form has a solution in terms of a matrix exponential

$$P(\boldsymbol{\omega}, t) = \exp(\mathcal{J}(\boldsymbol{\omega}))$$

This matrix exponential is intractable for large $|\Omega|$. However, in the Finite State Projection algorithm, it is possible to truncate the state space $\Omega \to \tilde{\Omega}$ and obtain good estimates $\tilde{P}(\boldsymbol{\omega},t)$ with some certificate of accuracy.

2.6.1 Sequential tempered Markov Chain Monte Carlo

CHAPTER 3 ${\bf IFN-}\gamma \ {\bf INDUCED} \ {\bf TRANSCRIPTIONAL \ BURSTS}$

Appendices

APPENDIX A

DERIVATION OF THE FOKKER PLANCK EQUATION

A.O.1 Kramers-Moyal Expansion

Given many instantiations of a stochastic xariable x, we can construct a normalize histogram over all observations as a function of time P(x,t). However, in order to systematically explore the relationship between the parameterization of the process and P(x,t) we require an expression for $\dot{P}(x,t)$. If we make a fundamental assumption that the exolution of P(x,t) follows a Markox process i.e. its exolution has the memoryless property, then we can write

$$P(x',t) = \int T(x',t|x,t-\tau)P(x,t-\tau)dx$$
(A.1)

which is known at the Chapman-Kolmogorox equation. The factor $T(x',t|x,t-\tau)$ is known as the transition operator in a Markox process and determines the exolution of P(x,t) in time. We proceed by writing $T(x',t|x,t-\tau)$ in a form referred to as the Kramers-Moyal expansion

$$T(x',t|x,t-\tau) = \int \delta(u-x')T(u,t|x,t-\tau)du$$
$$= \int \delta(x+u-x'-x)T(u,t|x,t-\tau)du$$

If we use the Taylor expansion of the δ -function

$$\delta(x+u-x'-x) = \sum_{n=0}^{\infty} \frac{(u-x)^n}{n!} \left(-\frac{\partial}{\partial x}\right)^n \delta(x-x')$$

Inserting this into the result from aboxe, pulling out terms independent of u and swapping

the order of the sum and integration gixes

$$T(x',t|x,t-\tau) = \sum_{n=0}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x} \right)^n \delta(x-x') \int (u-x)^n T(u,t|x,t-\tau) du$$
 (A.2)

$$= \sum_{n=0}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x} \right)^n \delta(x - x') M_n(x, t)$$
(A.3)

noticing that $M_n(x,t) = \int (u-x)^n T(u,t|x,t-\tau) du$ is just the *n*th moment of the transition operator T. Plugging (2.6) back in to (2.4) gixes

$$P(x,t) = \int \left(1 + \sum_{n=1}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x}\right)^n M_n(x,t)\right) \delta(x - x') P(x, t - \tau) dx \tag{A.4}$$

$$= P(x', t - \tau) + \sum_{n=1}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x} \right)^n [M_n(x, t) P(x, t)]$$
(A.5)

Approximating the derivative as a finite difference and taking the limit $\tau \to 0$ gives

$$\dot{P}(x,t) = \lim_{\tau \to 0} \left(\frac{P(x,t) - P(x,t-\tau)}{\tau} \right) \tag{A.6}$$

$$= \sum_{n=1}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x} \right)^n \left[M_n(x,t) P(x,t) \right]$$
 (A.7)

which is formally known as the Kramers-Moyal (KM) expansion. The Fokker-Planck equation is a special case of (2.10) where we neglect terms n > 2 in the diffusion approximation.

Consider the following Ito stochastic differential equation

$$d\vec{x} = F(\vec{x}, t) + G(\vec{x}, t)dW$$

The SDE given above corresponds to the Kramers-Moyal expansion (KME) of a transition density T(x', t'|x, t) see (Risken 1989) for a full derivation.

$$\frac{\partial P(x,t)}{\partial t} = \sum_{n=1}^{\infty} \frac{1}{n!} \left(-\frac{\partial}{\partial x} \right)^n [M_n(x,t)P(x,t)] \tag{A.8}$$

where M_n is the *n*th moment of the transition density. In the diffusion approximation, the KME becomes the Fokker-Planck equation (FPE) (Risken 1989). For the sake of demonstration, consider the univariate case with random variable x and the form of T(x', t'|x, t) is a Gaussian with mean $\mu(t)$ and variance $\sigma^2(t)$. In this scenario, the FPE applies because $M_n = 0$ for all n > 2. Given that the drift $M_1(x, t) = \mu(t)$ and the diffusion $M_2(x, t) = \sigma^2(t)$, the FPE reads

$$\frac{\partial P(x,t)}{\partial t} = \left(-\frac{\partial}{\partial x}M^{(1)}(t) + \frac{1}{2}\frac{\partial^2}{\partial x^2}M^{(2)}(t)\right)P(x,t) \tag{A.9}$$

We can additionally define the term in parentheses as a differential operator acting on P(x,t)

$$\hat{\mathcal{L}}_{FP} = \left(-\frac{\partial}{\partial x}M^{(1)}(t) + \frac{1}{2}\frac{\partial^2}{\partial x^2}M^{(2)}(t)\right) \tag{A.10}$$

It is common to additionally define the probability current J(x,t) as

$$J(x,t) = \left(M^{(1)}(t) - \frac{1}{2}\frac{\partial}{\partial x}M^{(2)}(t)\right)P(x,t)$$
 (A.11)

This definition provides some useful intuition. The value of J(x,t) is the net probability flux into the interval between x and x + dx at at time t. This also allows us to write the FPE as a continuity equation

$$\frac{\partial P(x,t)}{\partial t} = -\frac{\partial J(x,t)}{\partial x} \tag{A.12}$$

3.1 Poisson processes

The Poisson process can be derived very quickly by noticing that it is simply the continuoustime limit of the Binomial distribution.

$$B(m;t) = \binom{n}{m} \lambda^m (1-\lambda)^{n-m}$$

Since λ is the fraction of successes, the expected number of successes is $\mu = n\lambda$

$$B(m;t) = \binom{n}{m} \left(\frac{\mu}{n}\right)^m \left(1 - \frac{\mu}{n}\right)^{n-m}$$
$$= \binom{n}{m} \left(\frac{\mu}{n}\right)^m \left(1 - \frac{\mu}{n}\right)^n \left(1 - \frac{\mu}{n}\right)^{-m}$$

$$B(m;t) = \frac{n!}{m!(n-m)!} \left(\frac{\mu}{n}\right)^m \left(1 - \frac{\mu}{n}\right)^n \left(1 - \frac{\mu}{n}\right)^{-m}$$
$$= \frac{n!}{(n-m)!} \left(\frac{1}{n}\right)^m \left(1 - \frac{\mu}{n}\right)^{-m} \frac{\mu^m \left(1 - \frac{\mu}{n}\right)^n}{m!}$$

In the first term, we can take the first m subterms of the numerator n! = n(n-1)...(n-m) and, since n >> m, each term will cancel with one factor of n from the term $1/n^m$. This leaves

$$B(m;t) = \frac{(n-m)!}{(n-m)!} \left(1 - \frac{\mu}{n}\right)^{-m} \frac{\mu^m \exp(-\mu)}{m!}$$

We now take the continuous time limit i.e. $n \to \infty$ and, again, since m << n we are left with

$$\lim_{n \to \infty} B(m;t) = \frac{\mu^m \exp(-\mu)}{m!}$$

If an event can be detected will probability γ , the rate of the Poisson process will be reduced by that factor i.e., $\lambda' = \gamma \lambda$. Therefore, the mean and variance of the process becomes $\mu = \gamma \lambda \Delta t$