

JESUS LOVES YOU !

WE CREATE VALUE !



Eco-Friendly Seismic-Resistant Anti-Slip Resin Floor Systems



OFFICE: 406, C-dong, M-State, 114 Beobwon-ro, Songpa-gu, Seoul, Korea
TEL: +82-2-420-2844~5 **FAX:** +82-2-413-8605





03

About Sky Floor

Material Form

Sky Floor is formed by blending a dedicated antimicrobial flooring resin with a powder of calcined inorganic materials, producing a high-density, non-absorbent, impermeable, anti-slip floor. With its low volatile organic compound (Low VOC) content, it is an eco-friendly product.

Structural Form

The strong bond between the Stainless Wire Glass Mesh Sheet and Sky Resin resists cracks originating in the concrete structure, protecting the floor and preventing delamination — a flooring solution engineered for long-term durability.

Finish Form

Product specifications adapt to site requirements and conditions, allowing a wide range of build thicknesses and surface finishes: seamless solid-color finishes, anti-slip finishes, and decorative interior finishes.



< Sky Floor products >

04

Sky Floor Features

Physical Properties

- Crack Resistance

The strong bond of the Stainless Wire Glass Mesh Sheet and Sky Resin protects the floor from cracks originating in the structure.

- Seismic Performance

The bonded structure (Sheet + Resin) responds to floor cracks and building movement, preventing peeling and delamination for long-term durability.

- Impermeability

The dense structure blocks penetration of detergents and chemicals.

- Impact Resistance

A high-strength floor with excellent compressive strength.

Chemical Properties

- Eco-Friendly Product

Contains only low volatile organic compounds (Low VOC).

- Thermal-Shock Resistance

Depending on thickness and specification, resists hot water up to 120°C.

- Chemical Resistance

Resists acids, alkalis, solvents and industrial cleaning agents.

- Inertness

Blocks growth of mold, bacteria and microorganisms on the installed floor surface.

- Human-Safe

Generates no harmful compounds such as VOCs, benzene, toluene, cumene or xylene.

Hygienic & Maintenance Properties

- Non-Tainting

Uses no diluents such as thinner, so there is no irritating odor; it does not taint smell or taste in HACCP food-processing facilities.

- Clean & Safe


Easy to clean and maintain, providing a safe working environment.

- Anti-Slip Performance

Delivers optimal slip resistance.

05



Sky Color Quartz System

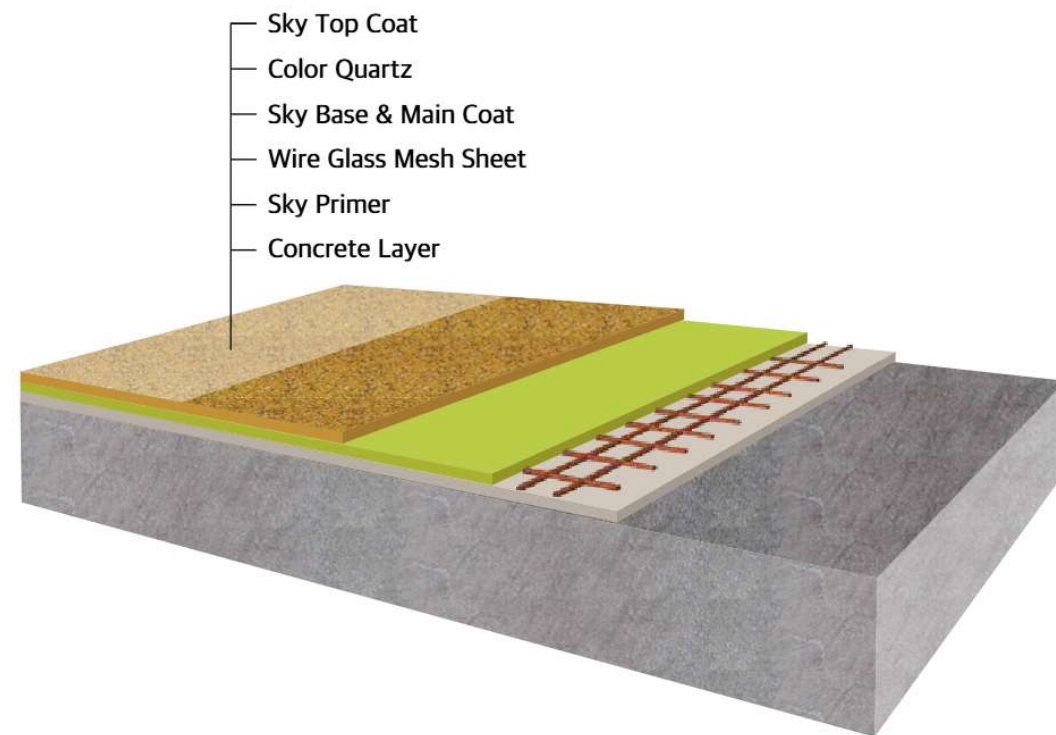

- **Application** : where strong anti-slip performance is required
- **Typical sites** : kitchens, school cafeterias, fish markets, ramps, HACCP facilities
- **Build thickness** : 3 mm ~ 6 mm

06


Sky Color Flakes System

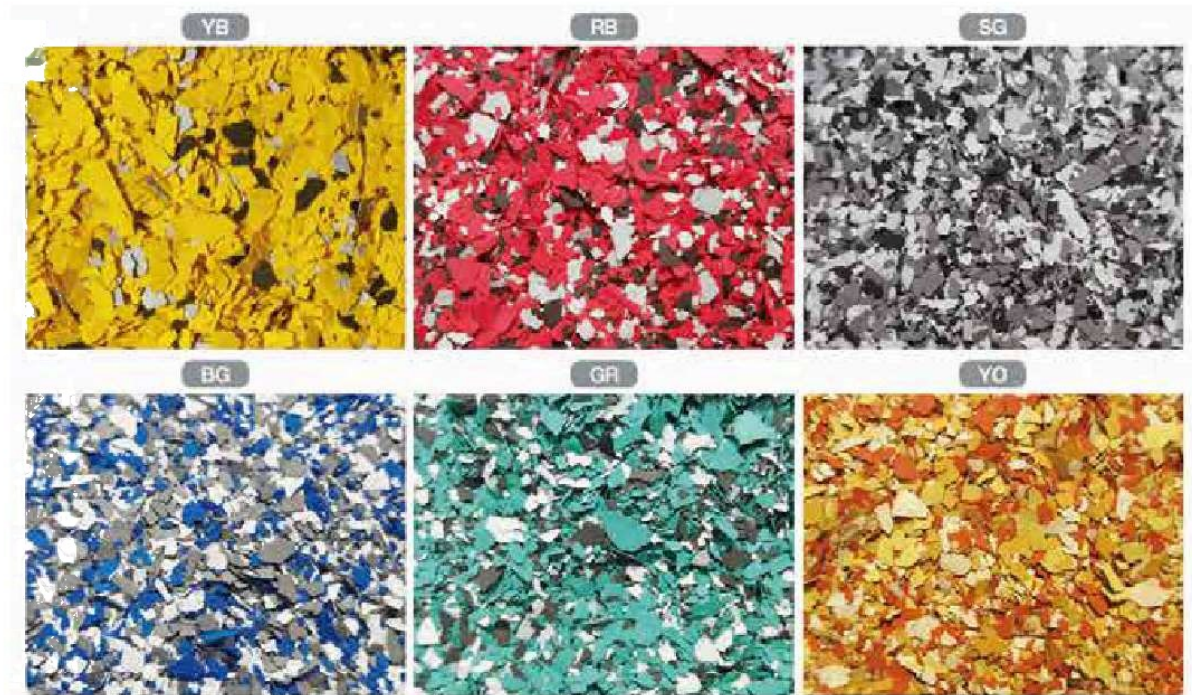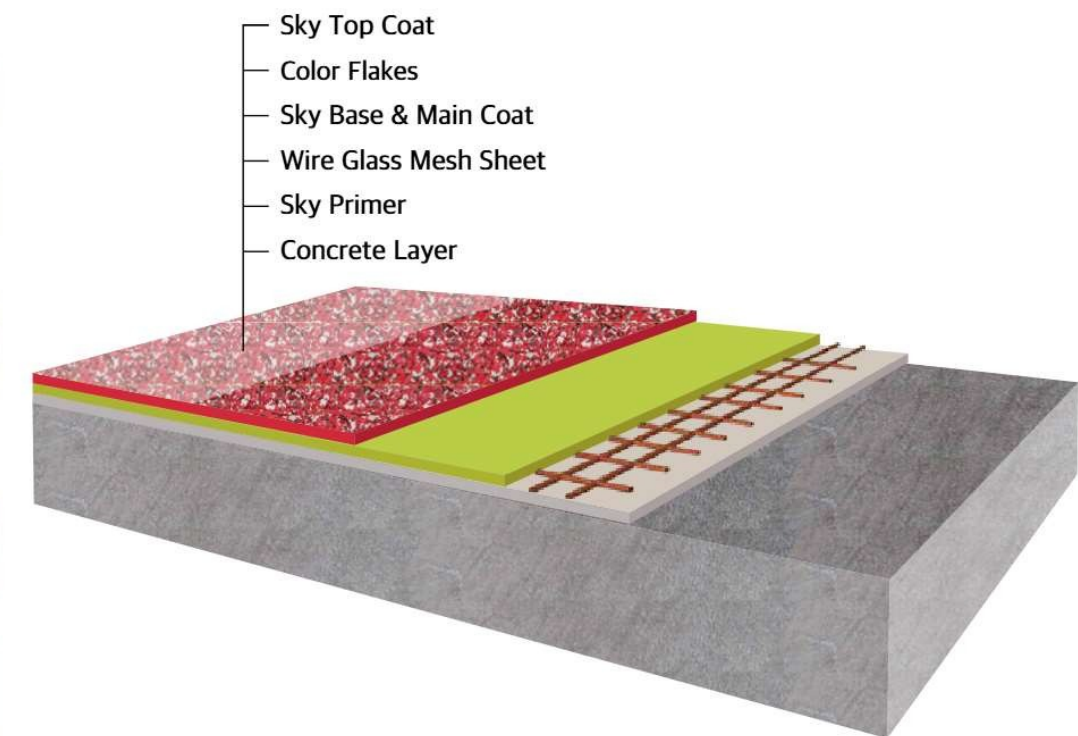

- **Application** : decorative interior effect where anti-slip performance is required
- **Typical sites** : classrooms, corridors, activity rooms, cafeterias, libraries, exhibition halls
- **Build thickness** : 3 mm ~ 6 mm

07

Sky Color Seamless System

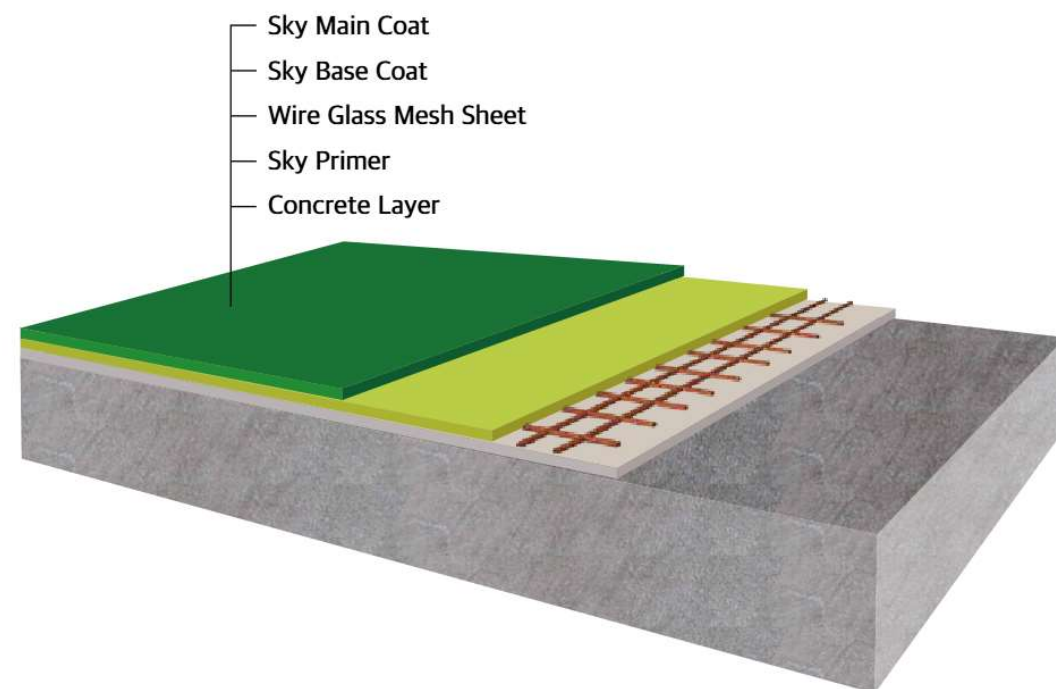

RED

BUFF

GREEN

BLUE


LIGHT GREY

DARK GREY

- **Application** : seamless floors, anti-slip areas, thin-build floors
- **Typical sites** : parking garages, warehouses, HACCP processing plants, offices, factory floors, fish markets
- **Build thickness** : 2 mm ~ 10 mm

08


Sky AquaCrete System

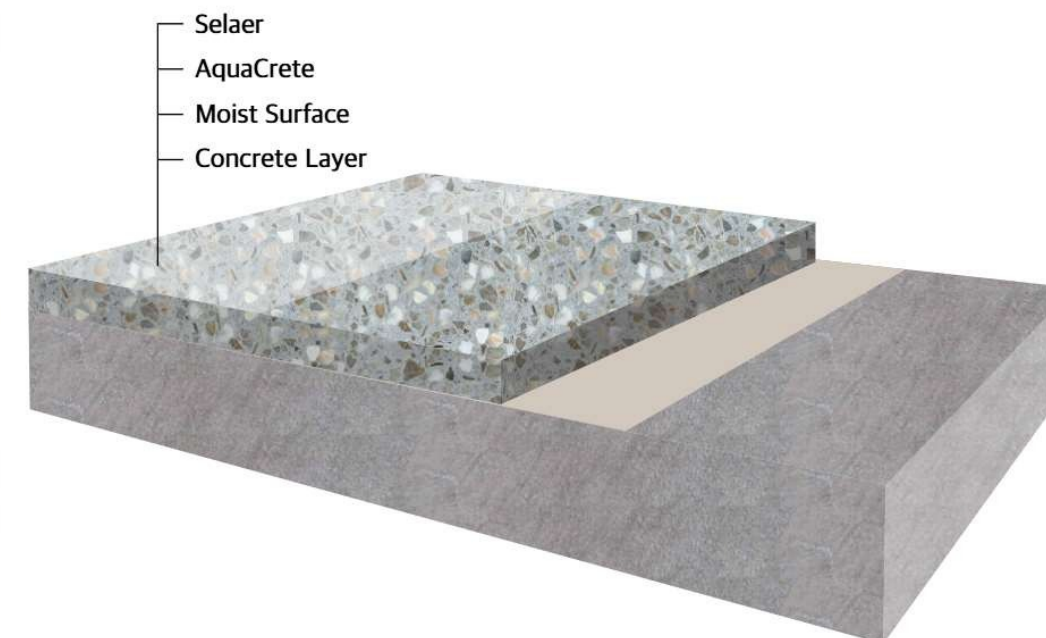

- **Application** : non-combustible flooring; installation over damp substrates
- **Typical sites** : soup-kettle zones, high-heat zones, cold and freezer rooms, trench-surround reinforcement, HACCP facilities
- **Build thickness** : 30 mm ~ 100 mm


09

Sky Coving System

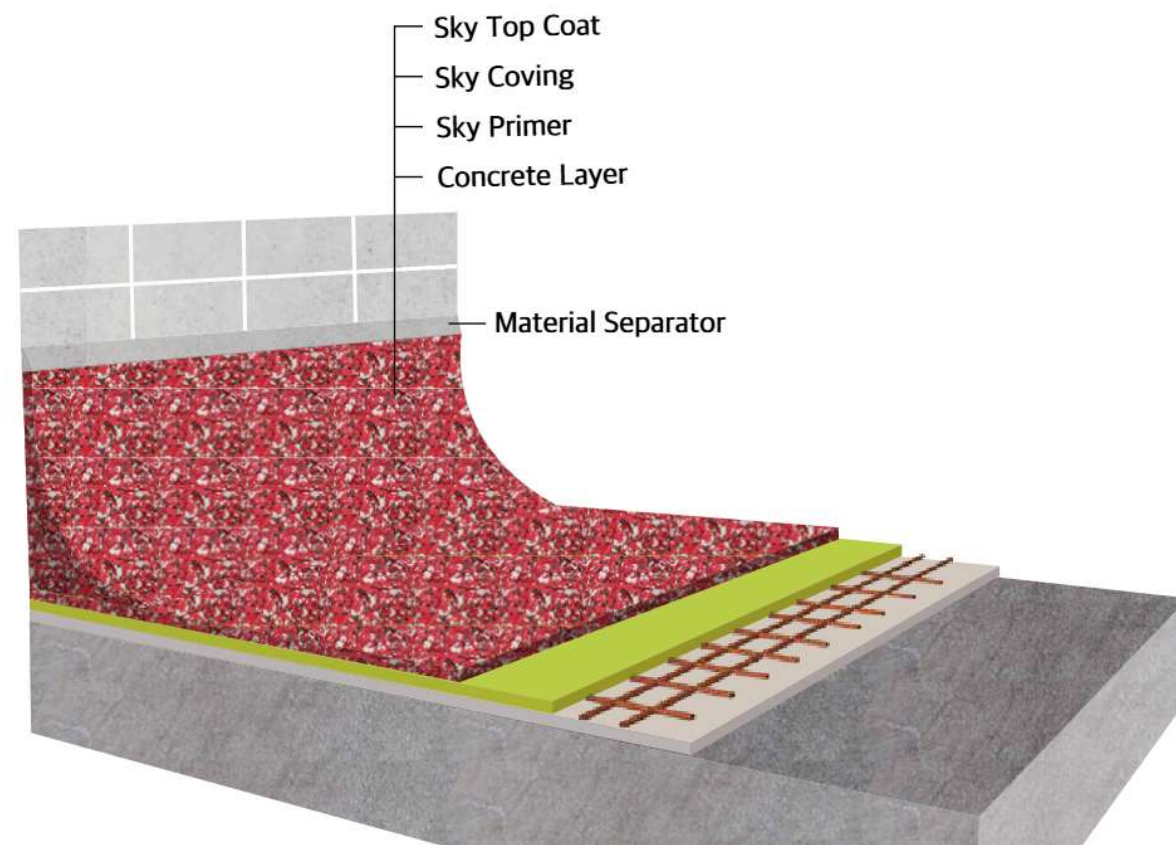

10

Sky Reinforce System

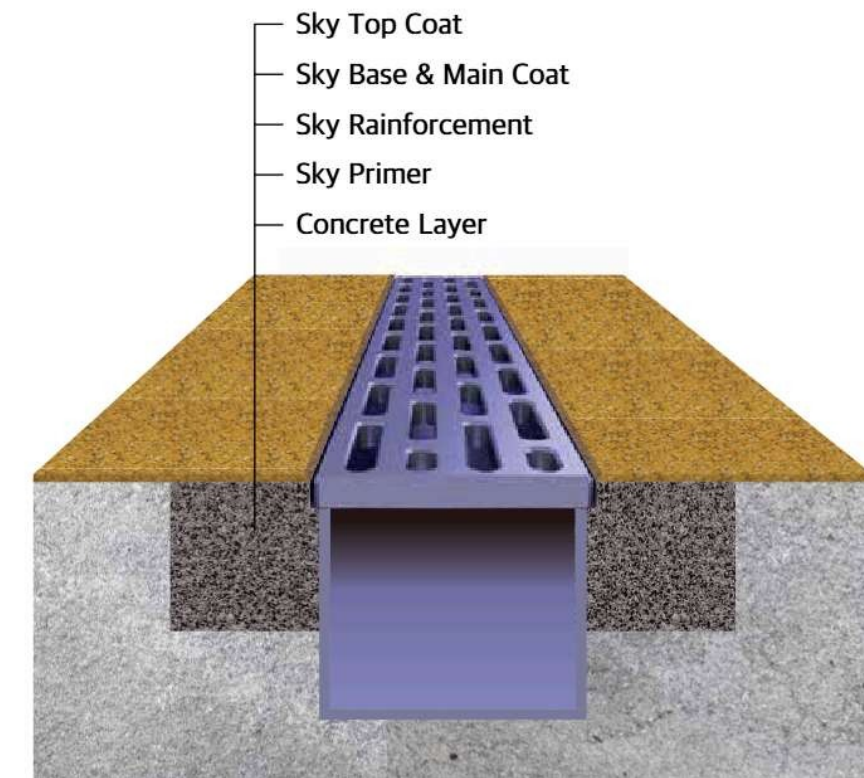

11 Sky Floor Installation Gallery




12 Sky Floor Installation Gallery





13

Sky Floor Installation Gallery

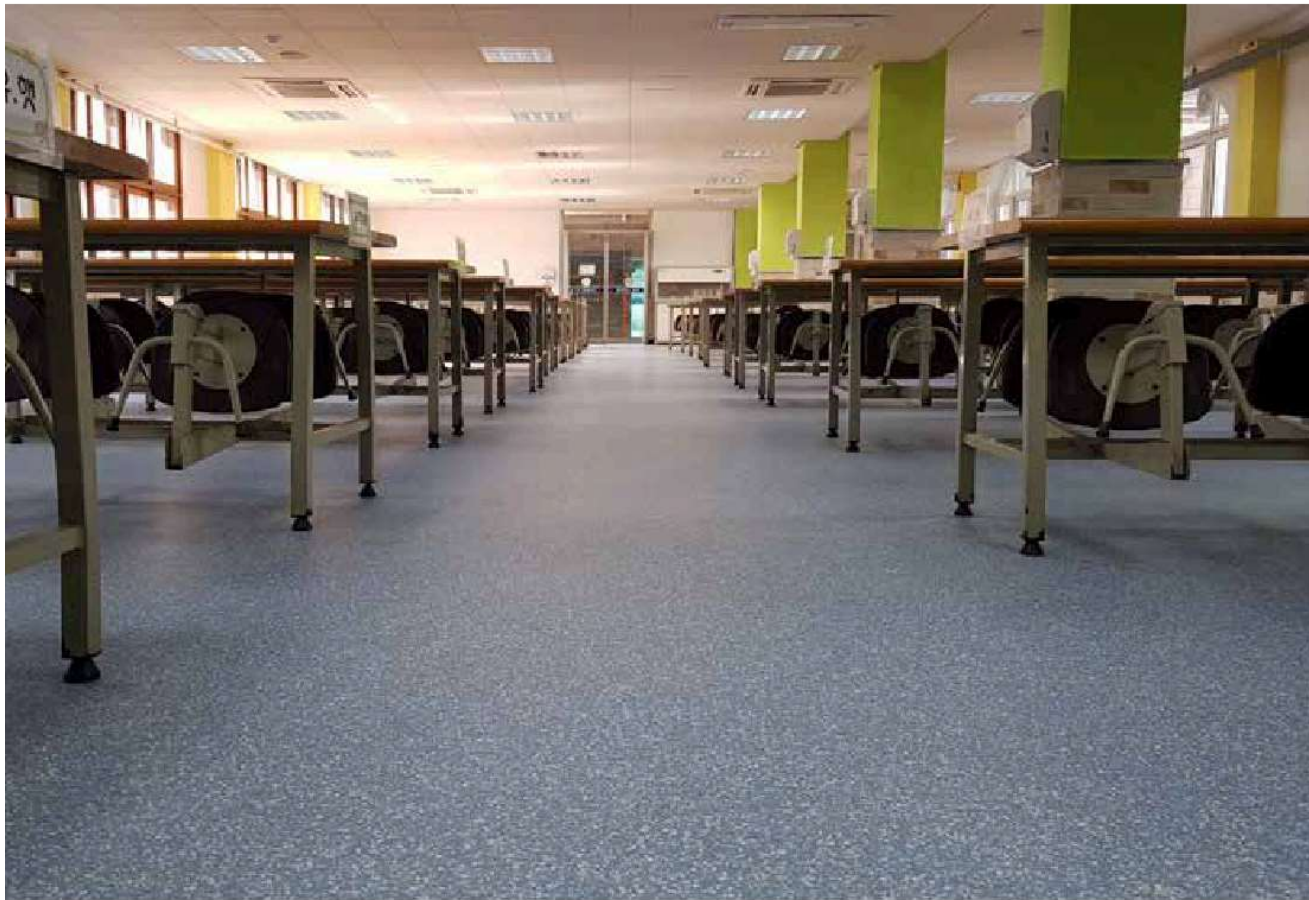

14

Sky Floor Installation Gallery

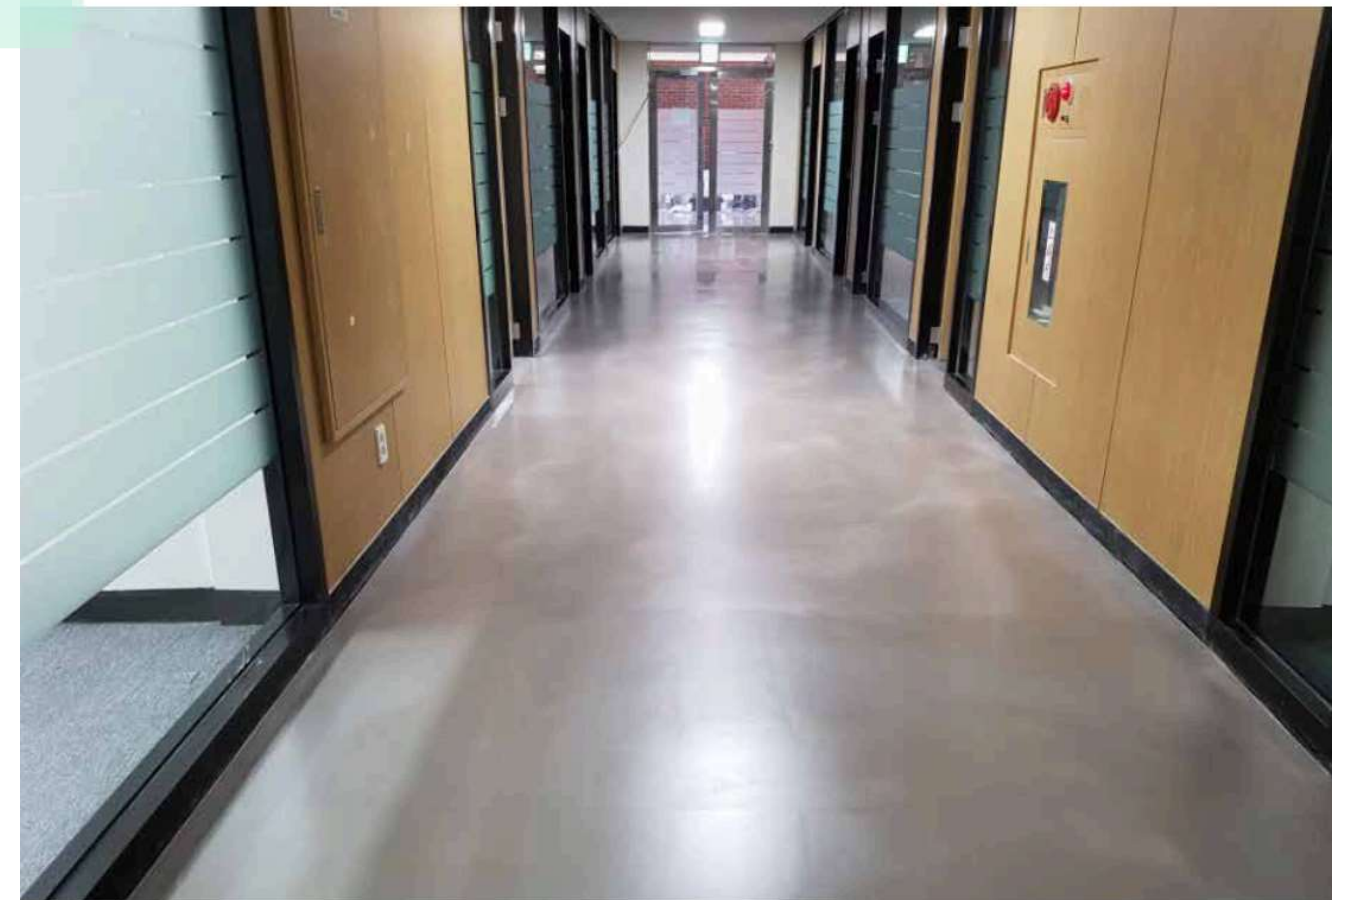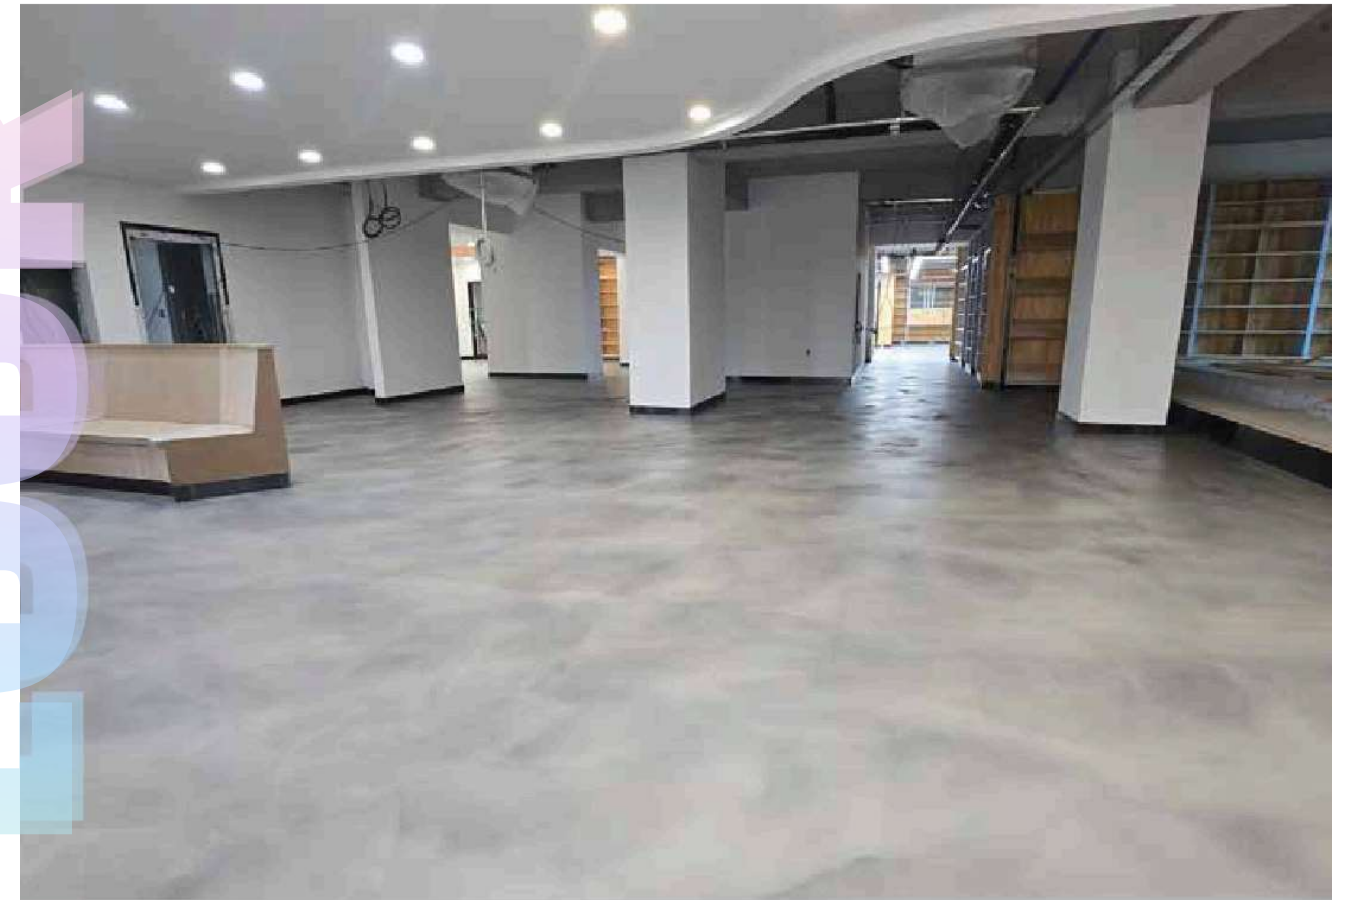

15

Sky Floor Installation Gallery



16

Sky Floor Installation Gallery



17 Sky Floor Installation Gallery



18 Sky Floor Installation Gallery

