SUBOFF native-mesh initialization diagnostic

Actual body-fitted cells: 6,810

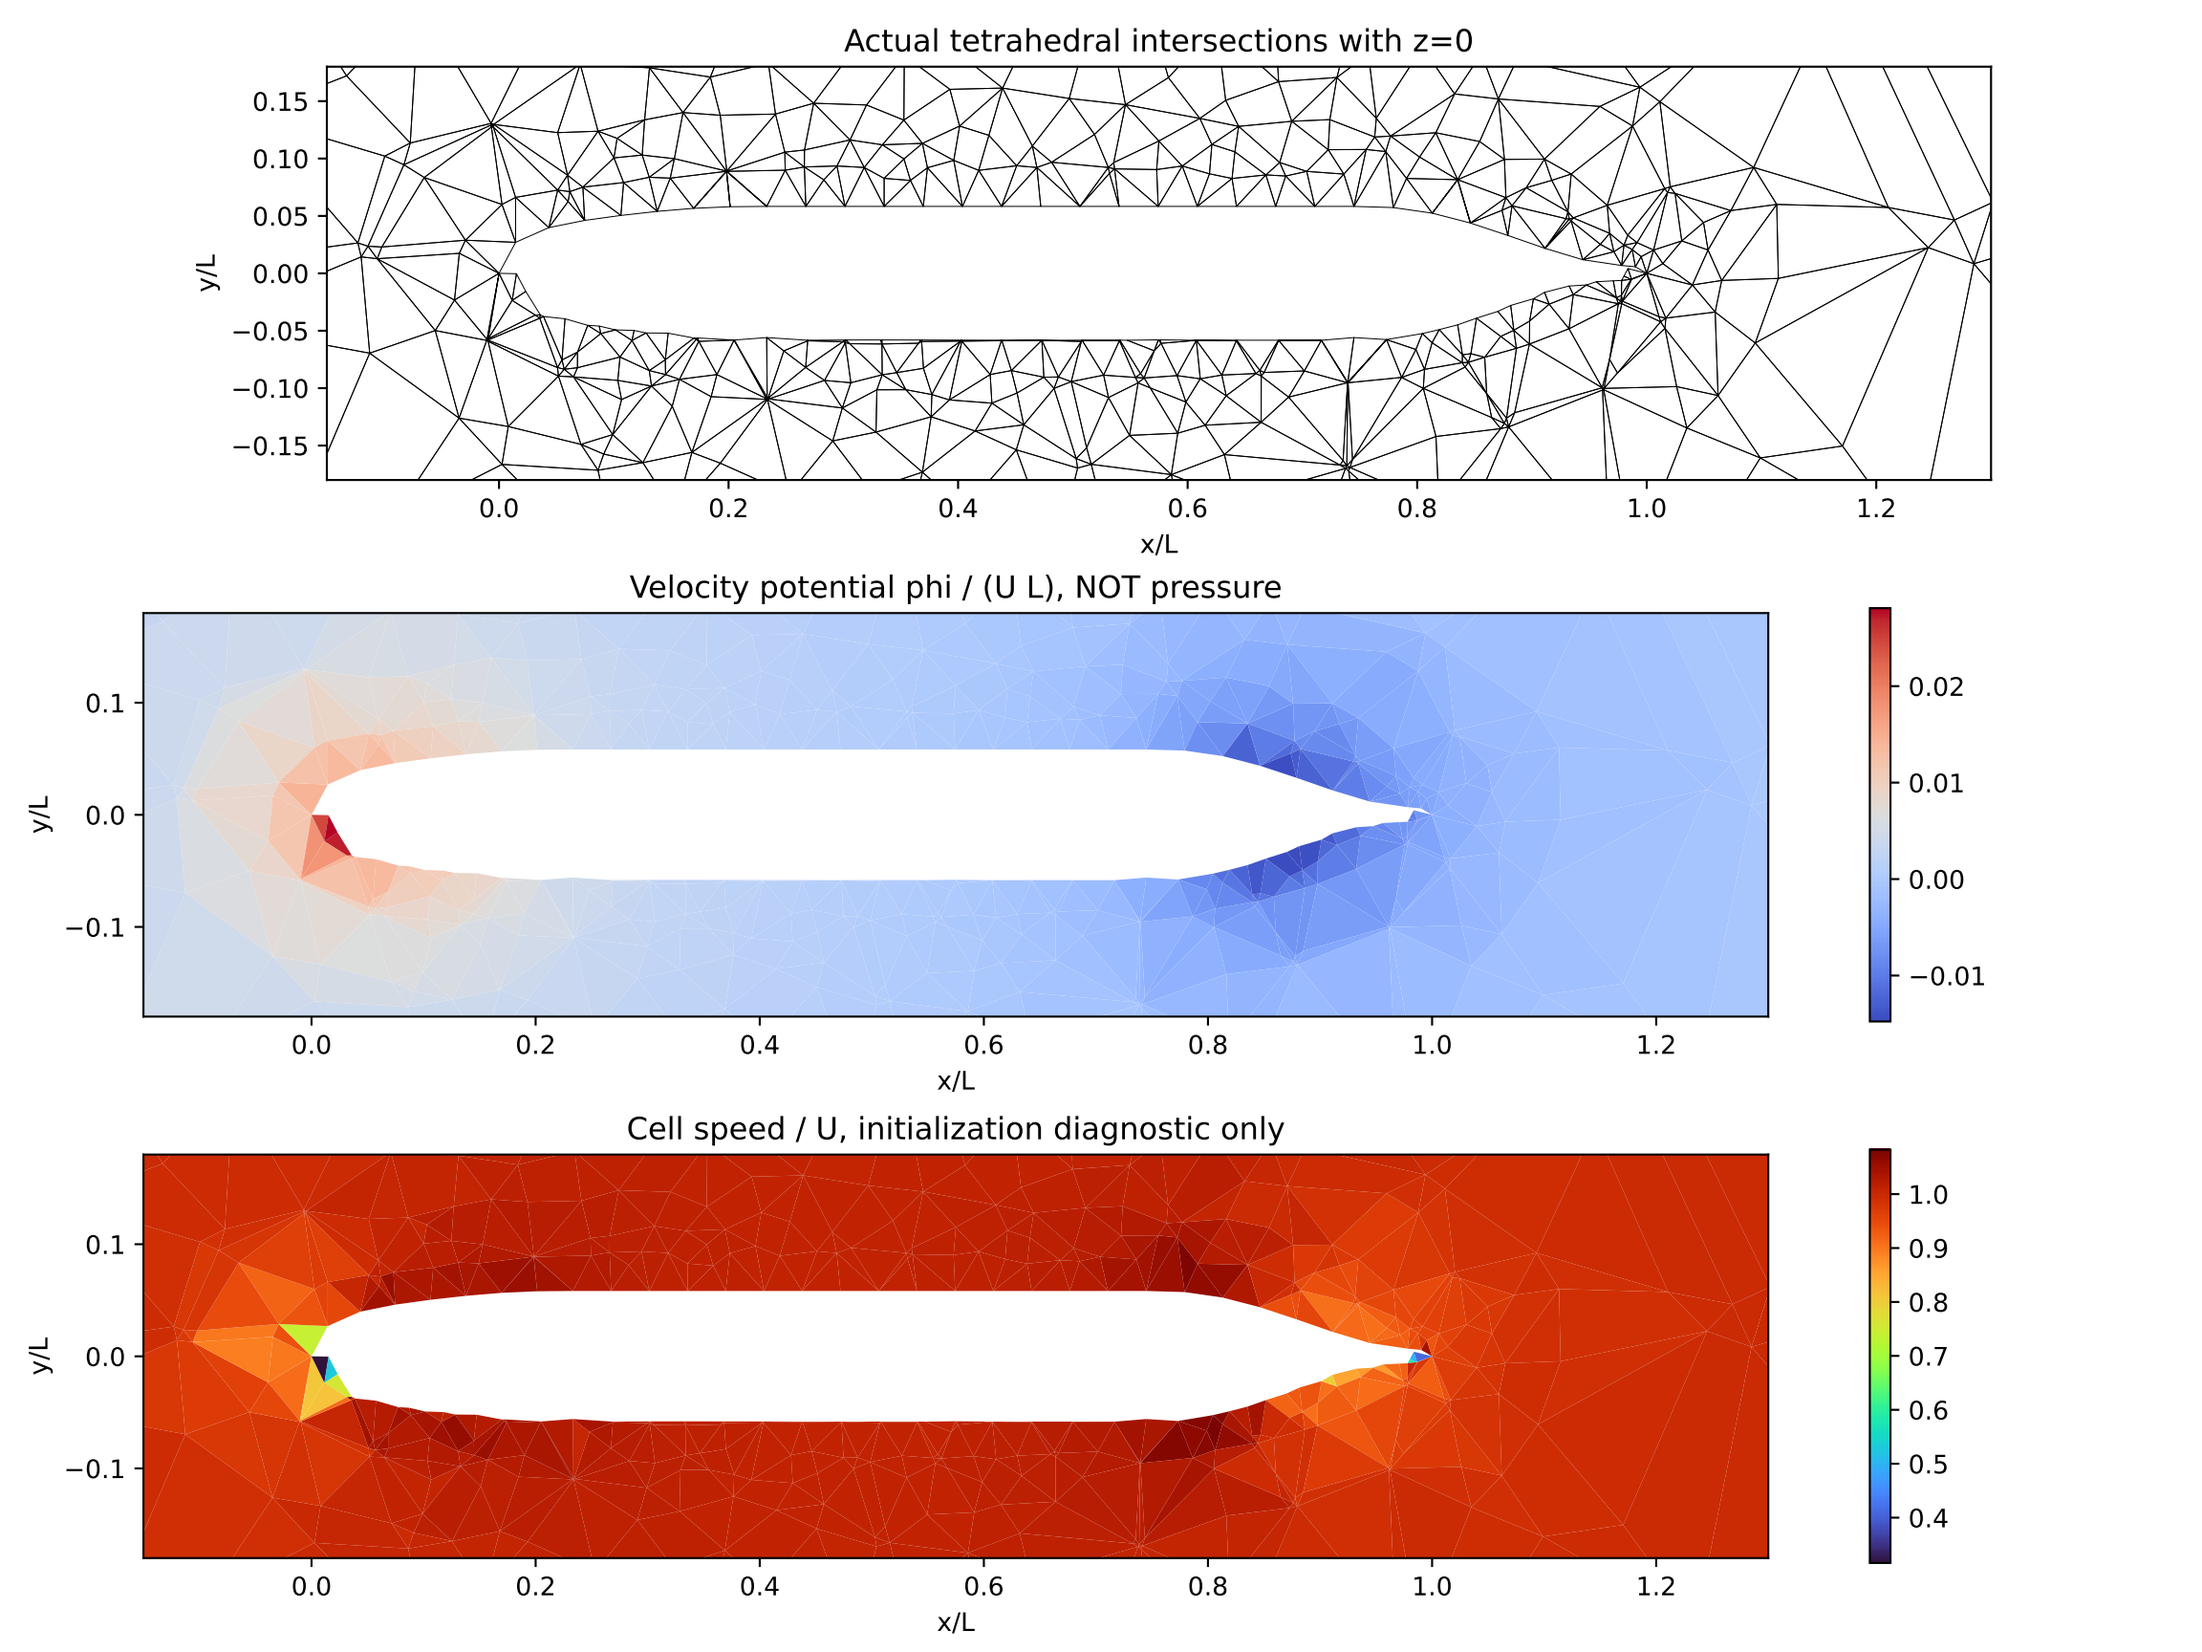
Native divergence: 1.737e-12 U/L

Wall normal speed: 8.863e-17 U

Interior cell/face normal discrepancy: 0.1633 U

The computed scalar is velocity potential, NOT physical pressure.
No physical time, viscosity, turbulence or drag has been computed.
No Reynolds-number or 3% accuracy qualification is implied.

This tests SUBOFF topology, boundary normals, native projection,
conservative initialization and exposes cell/face discrepancy.
See report.md and result.json for exact scope and reproduction.


Actual tetrahedral intersections with z=0
y/L
x/L
Velocity potential phi / (U L), NOT pressure
y/L
x/L
Cell speed / U, initialization diagnostic only
y/L
x/L