


RS 485 to SN8F570210

SN8F570210 Enhanced 8051 microcontroller, 4 KB non-volatileflash memory (IROM), 256 bytes internal RAM (IRAM), 13 interrupt sources with priority levels control and unique interrupt vectors, 1set16-bit PWM generators, 12-bit SAR ADC, SPI, UART, I2C, On-Chip Debug Support.

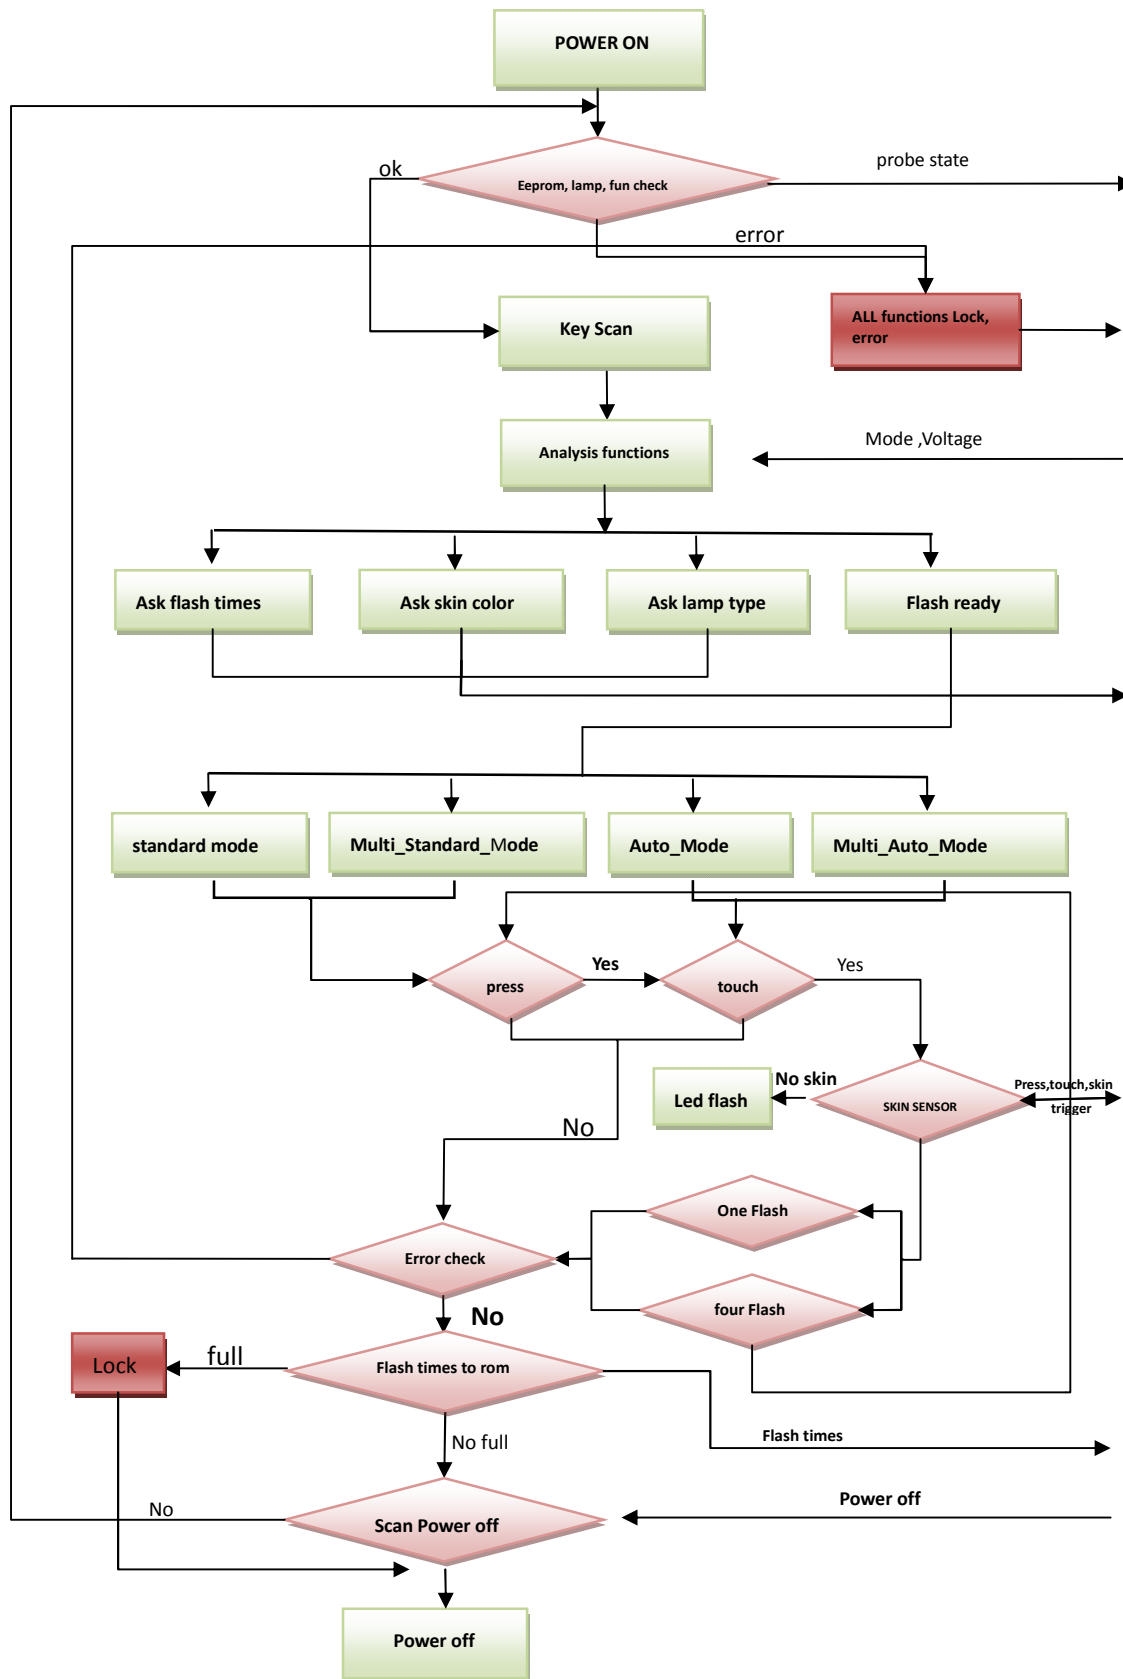

RS 485 to STM8S105C4