
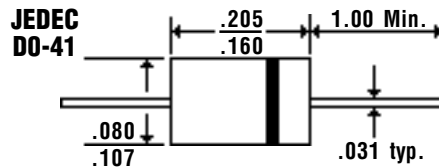


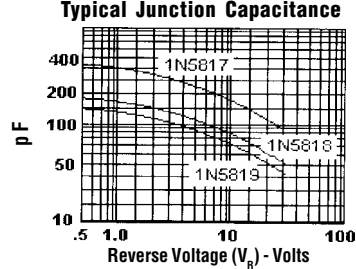


**1.0 Amp SCHOTTKY  
BARRIER RECTIFIERS****Description****Mechanical Dimensions****Features**

- EXTREMELY LOW  $V_F$
- LOW POWER LOSS — HIGH EFFICIENCY
- LOW STORED CHARGE; MAJORITY CARRIER CONDUCTION
- MEETS UL SPECIFICATION 94V-0

**1N5817, 18 & 19 Series**

Electrical Characteristics @ 25°C.		1N5817, 18 & 19 Series			Units
Maximum Ratings		1N5817	1N5818	1N5819	
Peak Repetitive Reverse Voltage... $V_{RRM}$		20	30	40	Volts
Working Peak Reverse Voltage... $V_{RWM}$		20	30	40	Volts
DC Blocking Voltage... $V_{DC}$		20	30	40	Volts
RMS Reverse Voltage... $V_{R(rms)}$		14	21	28	Volts
Average Forward Rectified Current... $I_{F(av)}$ @ $T_A = 55^\circ\text{C}$			1.0		Amps
Non-Repetitive Peak Forward Surge Current... $I_{FSM}$ @ Rated Load Conditions, 1/2 Wave, 60 HZ, $T_J = 75^\circ\text{C}$			25		Amps
Forward Voltage... $V_F$ @ $I_F = 3.0$ Amps		.450	.550	.600	Volts
DC Reverse Current... $I_R$ @ Rated DC Blocking Voltage	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$		1.0 10		mAmps mAmps
Typical Junction Capacitance... $C_j$		110	< .70	>	pF
Operating & Storage Temperature Range... $T_J, T_{STRG}$			-65 to 125		°C

**Typical Reverse Characteristics****Instantaneous Forward Characteristics****Typical Junction Capacitance**



**Datasheet5**  
——集成电路查询网

超过3, 000, 000种电子元器件资料免费查询

[www. datasheet5. com](http://www.datasheet5.com)