



## NetMemo tutorial

Author	Mohammed Mahboubi
Version	0.0.1.a (alpha)
Website	<a href="https://www.github.com/cybconv/netmemo">https://www.github.com/cybconv/netmemo</a>
Date	15-07-2016

## License



This document has been released under Creative Commons Attribution-ShareAlike 4.0 International license (CC BY-SA 4.0).

The reader may visit <https://creativecommons.org/licenses/by-sa/4.0/> for more details on this legal disclaimer.



## Document Changes History

[illegible]

## Table of Contents

License.....	2
Document Changes History.....	3
Table of Figures .....	5
Context.....	6
Available features.....	6
QoS.....	7
Layer2/3 conversions .....	7
Summary of RFC-recommended values for marking .....	8
Summary of AutoQoS for the Enterprise classes and DSCP values.....	9
IPv4.....	10
IPv6.....	11
Multicast.....	11
Security.....	12
Troubleshooting.....	13
Network settings.....	14

## Table of Figures

Figure 1 - A view of NetMemo on Microsoft Windows 10.....	6
Figure 2 - QoS tab : Control area .....	7
Figure 3 - Layers 2/3 QoS conversions .....	8
Figure 4 - Summary of RFC-recommended values for marking.....	9
Figure 5 - Summary of AutoQoS for the Enterprise classes and DSCP values.....	9
Figure 6 - A view of the IPv4/decimal conversion feature .....	10
Figure 7 - A view of the IPv4 calculations feature .....	10
Figure 8 - A view of the IPv6 tab.....	11
Figure 9 - conversion between multicast IPv4/IPv6 and MAC addresses .....	12
Figure 10 - The security tab view.....	12
Figure 11 - A view of the Troubleshooting tab .....	13
Figure 12 - A view of the Troubleshooting commands feature.....	14
Figure 13 - A view of the Network settings tab .....	14

## Context

I created NetMemo to maintain my skills; I was having in mind two things: to keep close to the Cisco world (especially all the skills acquired during my Cisco certification process) and to refresh my Java programming skills.

I developed NetMemo during winter 2011/2012 on part time between December 2011 and February 2012. It has been released as an open source project and published on GitHub on <https://www.github.com/cybconv/netmemo> .

For further details, I would recommend the reader to visit the project repository.

## Available features

After launching NetMemo, you are going to have a main window composed of seven tabs as depicted in the figure below. The default active tab is QoS. Also, after the launch of NetMemo, the user may have the possibility to control the application from the systray taskbar (usually on the bottom right of the screen on a MicroSoft Windows system).

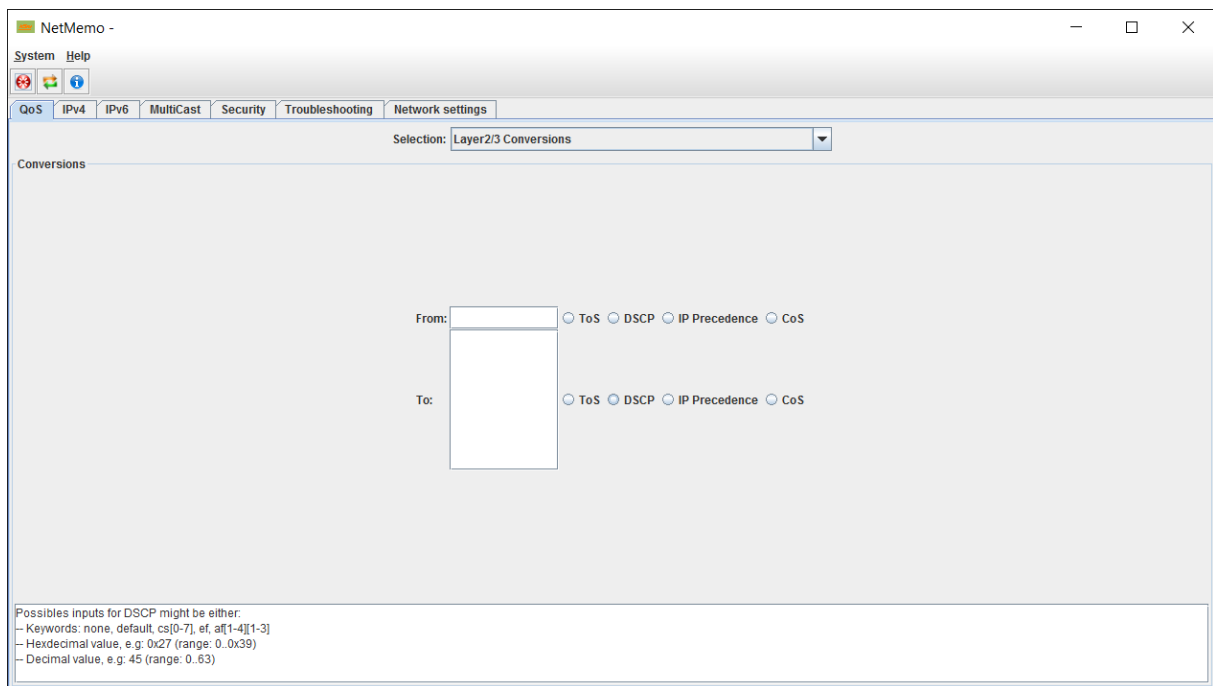


Figure 1 - A view of NetMemo on Microsoft Windows 10

In the following, I am going to discuss the seven tabs in that order: QoS, IPv4, IPv6, Multicast, Security, Troubleshooting and Network settings.

## QoS

**“QoS”** is the default active tab in NetMemo. When activated, the user will have three areas: the control (selection) area on the top, and the main area beneath of it.

From the control area, the user may select a view among three possible views:

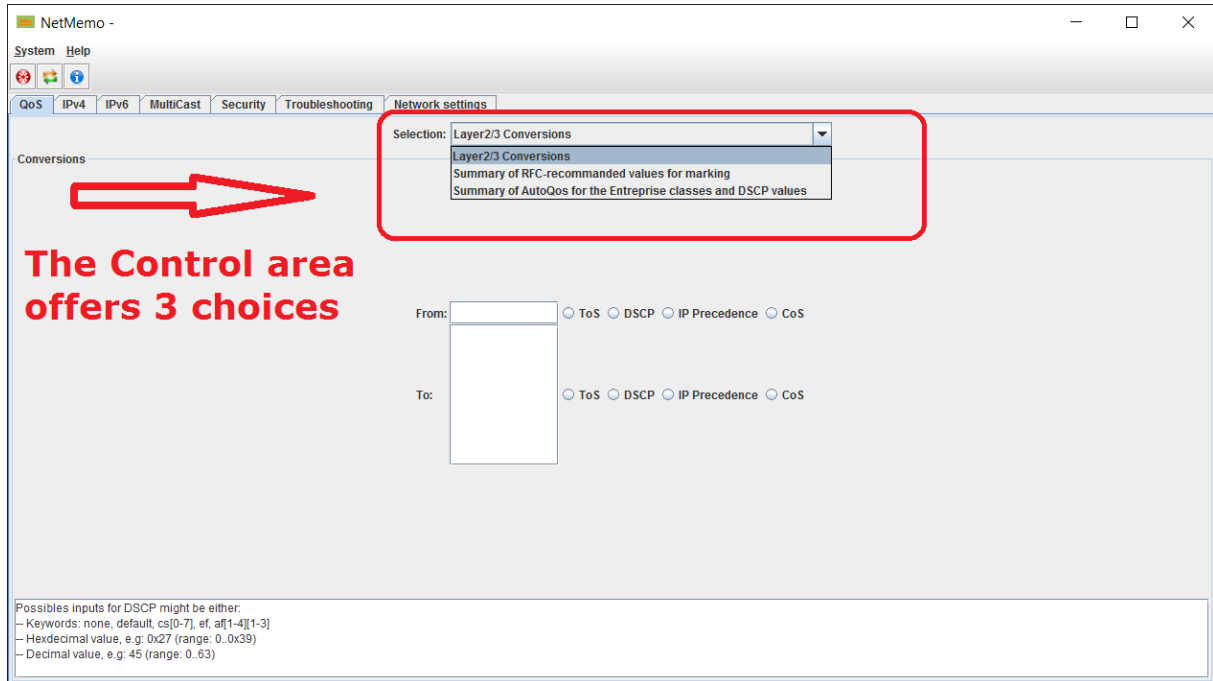


Figure 2 - QoS tab : Control area

- Layer2/3 conversions
- Summary of RFC-recommended values for marking
- Summary of AutoQoS for the Enterprise classes and DSCP values

## Layer2/3 conversions

The main area is composed of two areas: the conversions area (on the top) and the hints area (on the bottom). The purpose of the conversions area is to provide a conversion tool between ToS, DS field, IP precedence and CoS field's value.

- ➔ When considering DSCP, input valid values are:
- Integers values between 0 and 63
  - Best effort: default
  - Class Selectors: cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7,
  - Expedited Forwarding (real-time): ef
  - Assured Forwarding:
    - Low: af11, af21, af31, af41
    - Medium: af12, af22, af32, af42
    - High: af13, af23, af33, af43

- ➔ When considering ToS, valid input values range from 0 to 255.
- ➔ When considering IP precedence or CoS, valid input values range from 0 to 7.

This configuration is depicted in the figure below:

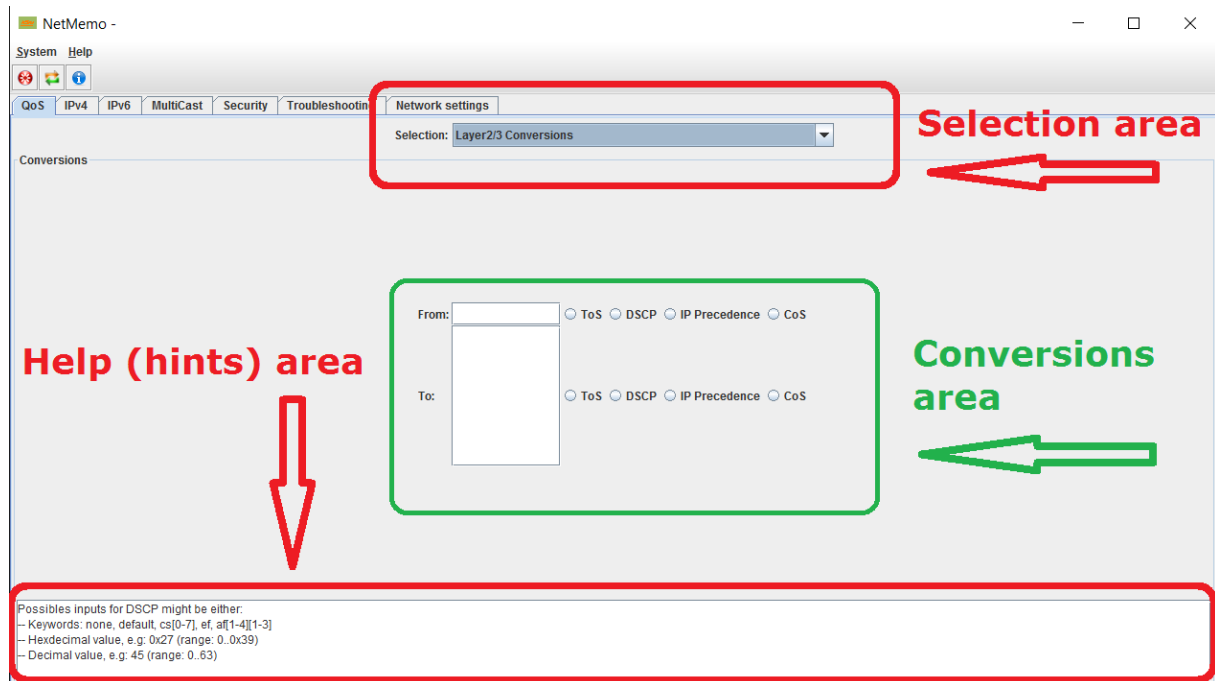


Figure 3 - Layers 2/3 QoS conversions

### Summary of RFC-recommended values for marking

This is a cheat sheet based on the DiffServ model. It provides a memo regarding default settings recommended by Cisco. But it is up to the engineering teams to define the QoS templates suitable for their own needs.



NetMemo -

System Help

QoS IPv4 IPv6 MultiCast Security Troubleshooting Network settings

Selection: Summary of RFC-recommended values for marking

RFC-recommended marking settings

Copy table to clipboard

Type of Traffic	CoS	IP Precedence	DSCP
Voice payload	5	5	ef
Video payload	4	4	af41
VoiceVideo signaling	3	3	cs3
Mission-critical data	3	3	af31,af32,af33
Transactional data	2	2	af21,af22,af23
Bulk data	1	1	af11,af12,af13
Best effort	0	0	default
Scavenger (less priority than best effort)	0	0	2,4,6

It is recommended not to use more than four or five different service classes for data traffic.  
By using more classes, the difference in behavior between the various classes tends to blur.  
For the same reason, do not give too many data service classes high-priority service.

Figure 4 - Summary of RFC-recommended values for marking

## Summary of AutoQoS for the Enterprise classes and DSCP values

This is a cheat sheet based on the DiffServ model. It provides a memo about default settings regarding the Cisco AutoQoS feature.

NetMemo -

System Help

QoS IPv4 IPv6 MultiCast Security Troubleshooting Network settings

Selection: Summary of AutoQoS for the Enterprise classes and DSCP values

AutoQoS marking settings

Copy table to clipboard

Class	DSCP/PHB Value	Traffic Types
Routing	cs6	elgrp,ospl
VoIP	ef	rtp voice media
Interactive Video	af41	rtp video media
Streaming Video	cs4	real audio,netshow
Control	cs3	rtcp,h323,sip
Transactional	af21	sap,ctrix,telnet,ssh
Bulk	af11	ftp,smtp,pop3,imap,exchange
Scavenger	cs1	peer-to-peer applications
Management	cs2	snmp,syslog,dhcp,dns
Best effort	all others	all others

Figure 5 - Summary of AutoQoS for the Enterprise classes and DSCP values

## IPv4

**“IPv4”** is the second tab in NetMemo. The control area allows the user to choose between either to make IPv4/decimal conversions or to make IPv4 calculations.

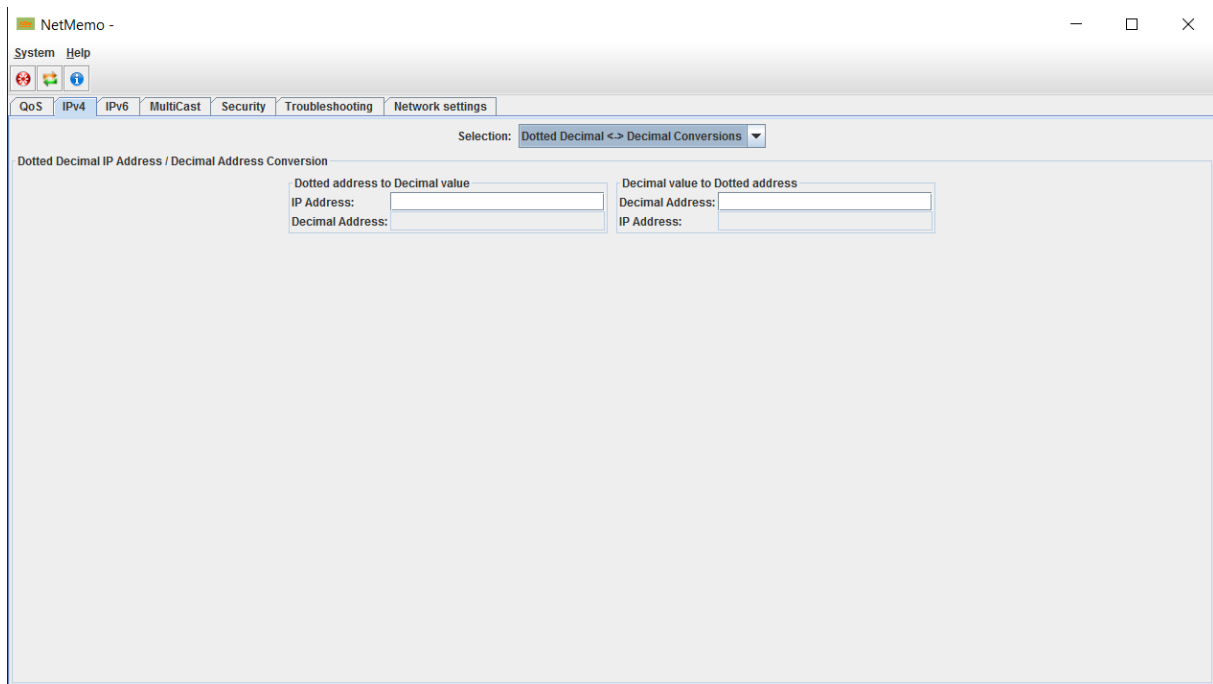


Figure 6 - A view of the IPv4/decimal conversion feature

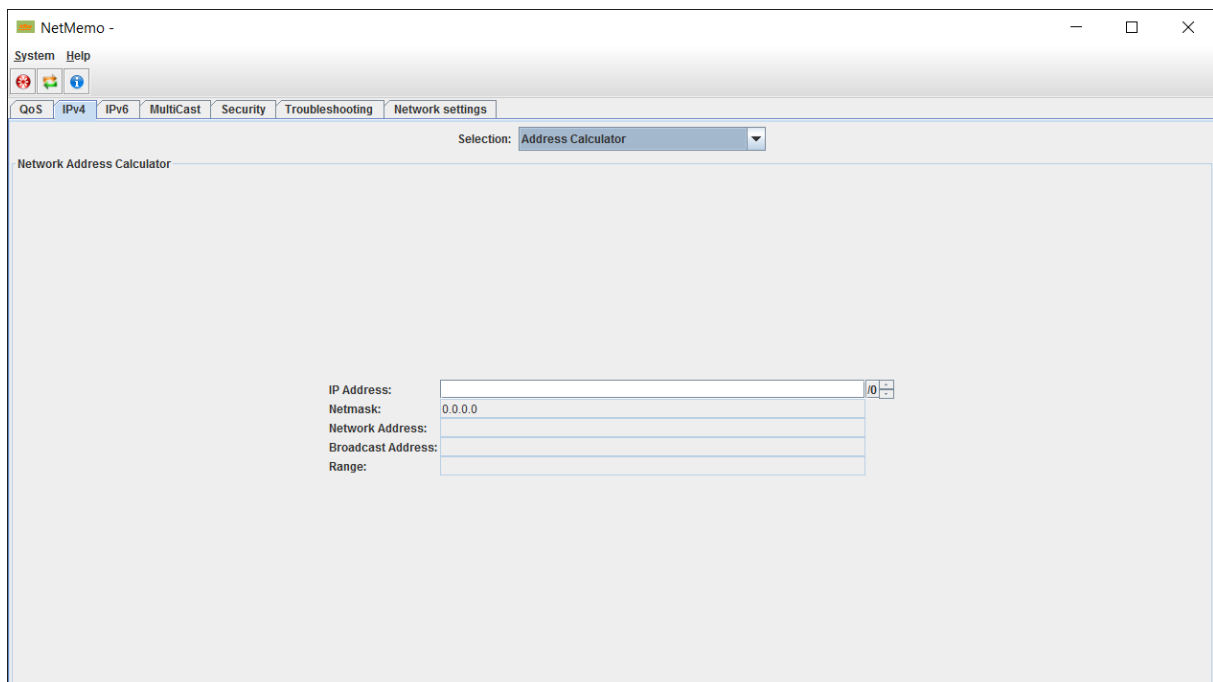


Figure 7 - A view of the IPv4 calculations feature

## IPv6

**“IPv6”** is the third tab in NetMemo. This tab allows the user to make some IPv6 calculations.

The control area provides three features:

- EUI64 calculation: by knowing the MAC address, the user can calculate different IPv6 that match the specified MAC address
- Tunneling: by knowing the IPv6 prefix and the IPv4 address of the tunneling gateway, the user can calculate different IPv6 tunnel addresses
- Misc.: by knowing an IPv6 address, the user can calculate the solicited node address

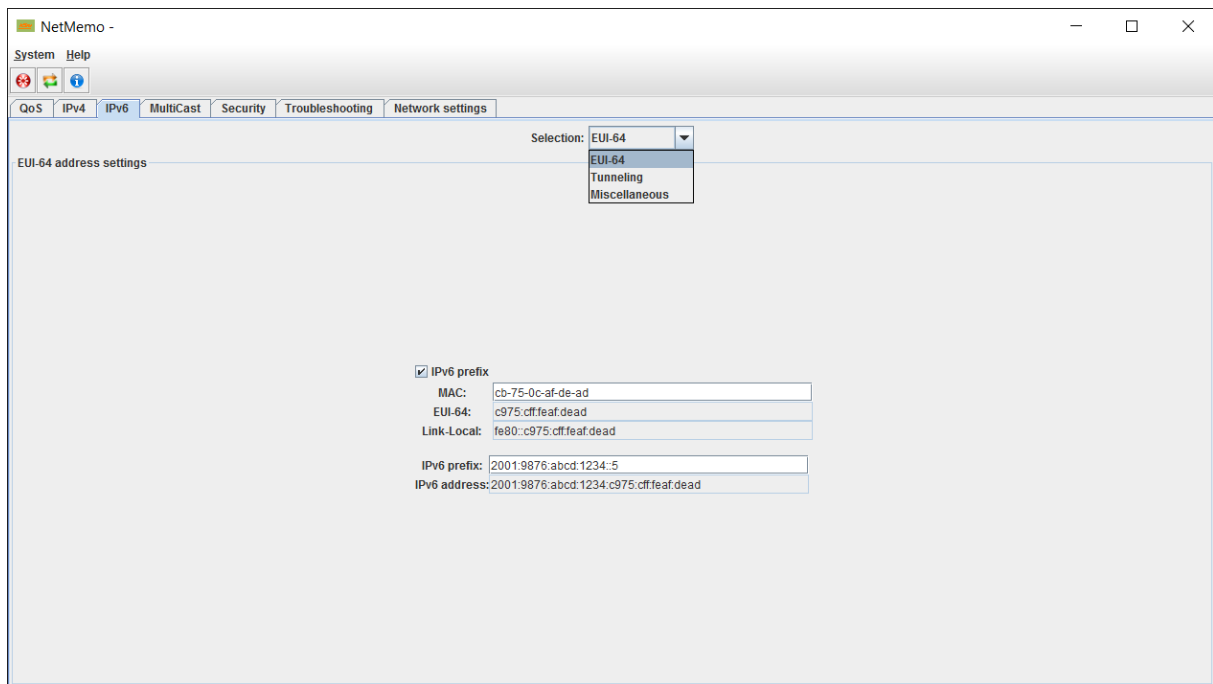


Figure 8 - A view of the IPv6 tab

## Multicast

**“Multicast”** is the fourth tab in NetMemo. This tab provides a conversion tool between multicast IPv4/IPv6 addresses and MAC addresses.

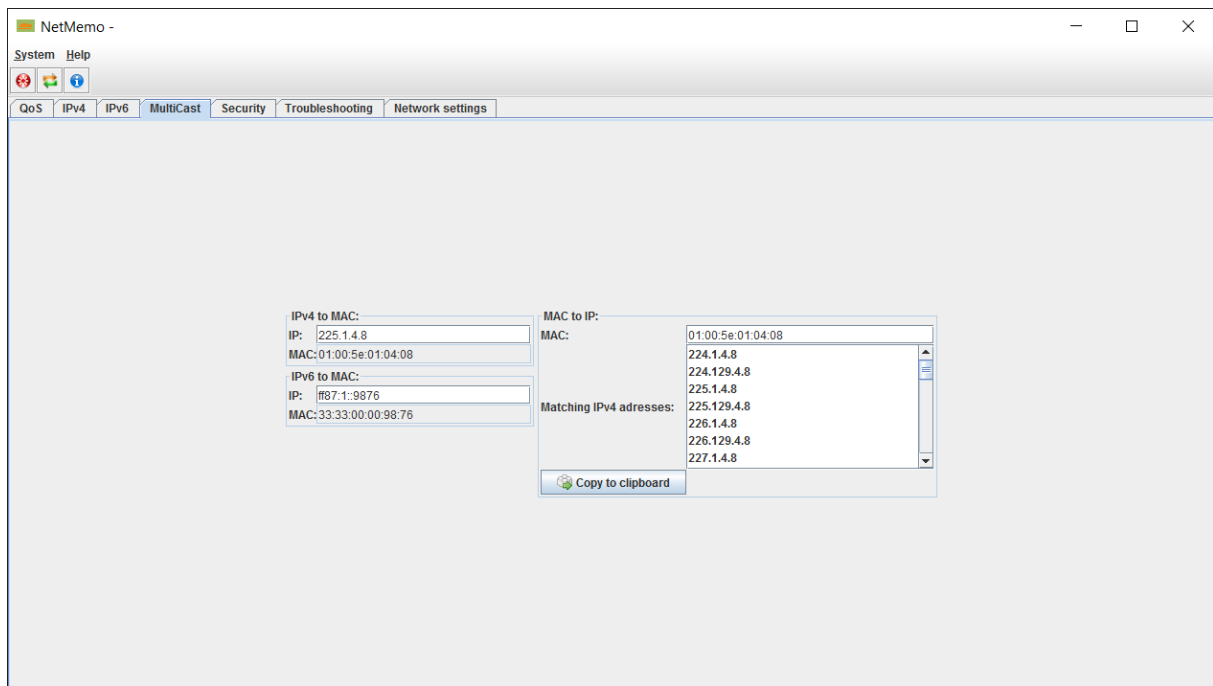


Figure 9 - conversion between multicast IPv4/IPv6 and MAC addresses

## Security

**“Security”** is the fifth tab in NetMemo. It allows the user to generate up to 1000 passwords having different proprieties then it allows the user to copy the generated list the clipboard for a later use.

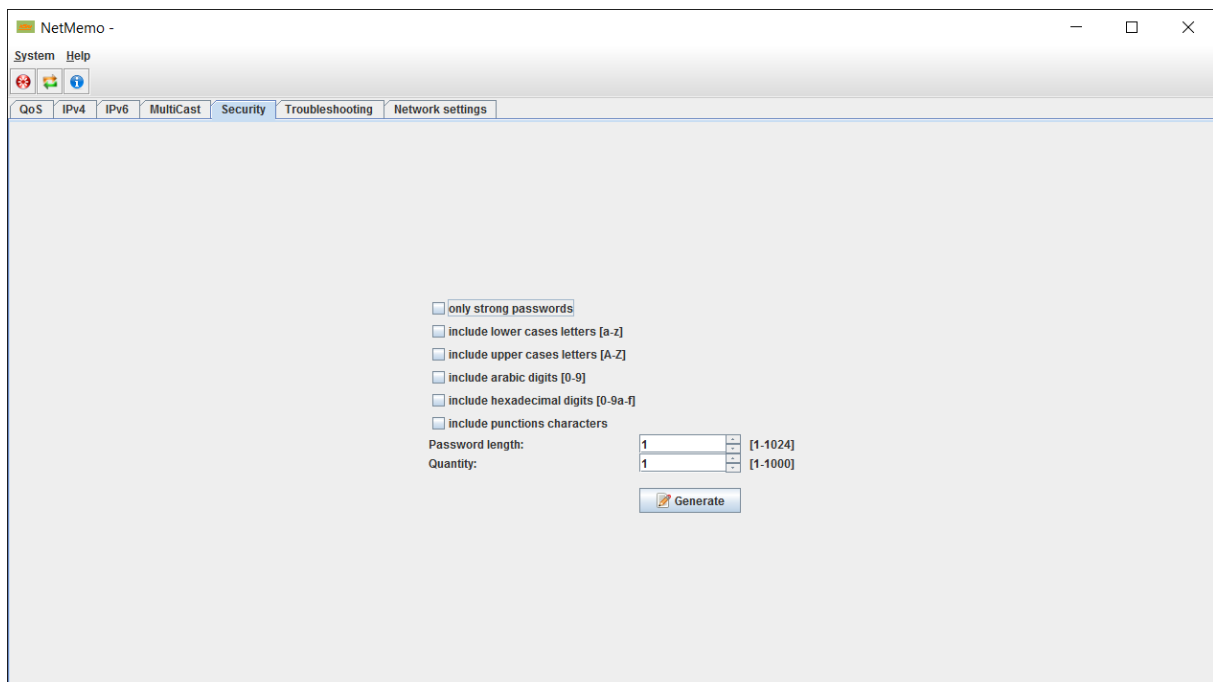


Figure 10 - The securtity tab view

## Troubleshooting

**“Troubleshooting”** is the sixth tab in NetMemo. On this tab, the user will have access to two features:

- A cheat sheet on values to apply on the configuration register on Cisco devices
- A summary of useful troubleshooting commands on Cisco devices

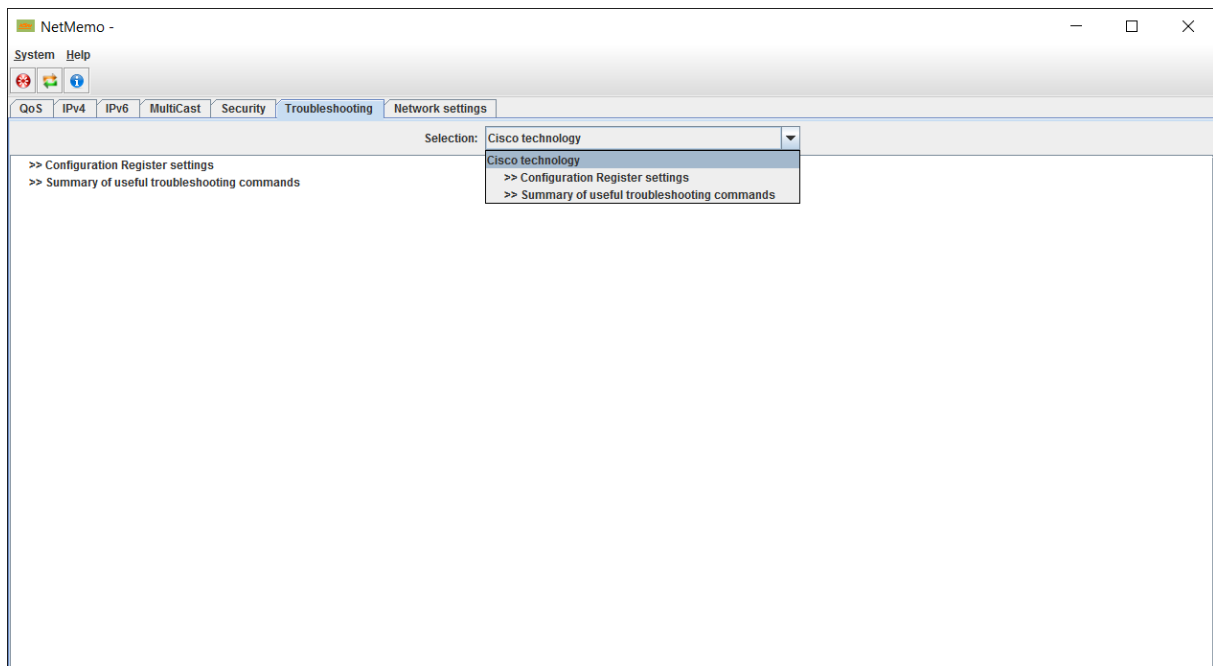


Figure 11 - A view of the Troubleshooting tab

When the user selects the troubleshooting commands feature. It will be presented with a split view:

- A navigation tree on the left to choose a topic
- A memo will become visible after choosing a subject from the navigation tree. A contextual tooltip will appear while the mouse hovers over the table

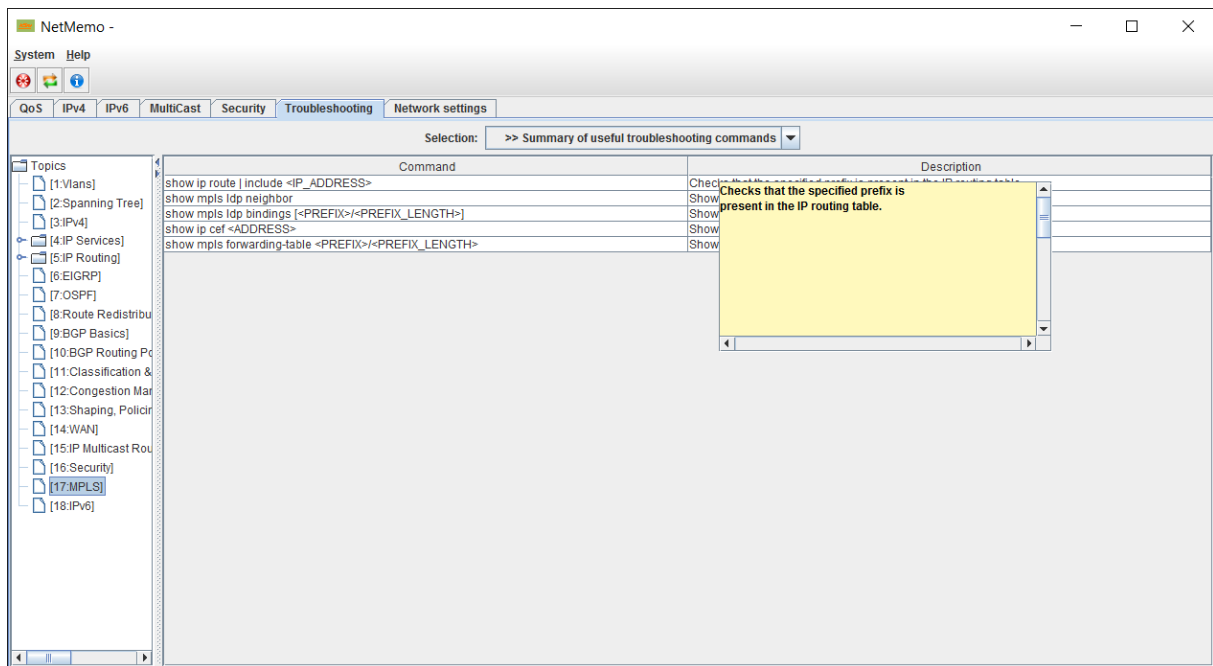


Figure 12 - A view of the Troubleshooting commands feature

## Network settings

**“Network settings”** is the seventh tab in NetMemo. This tab provides the user with a view of the networking settings of his computer.

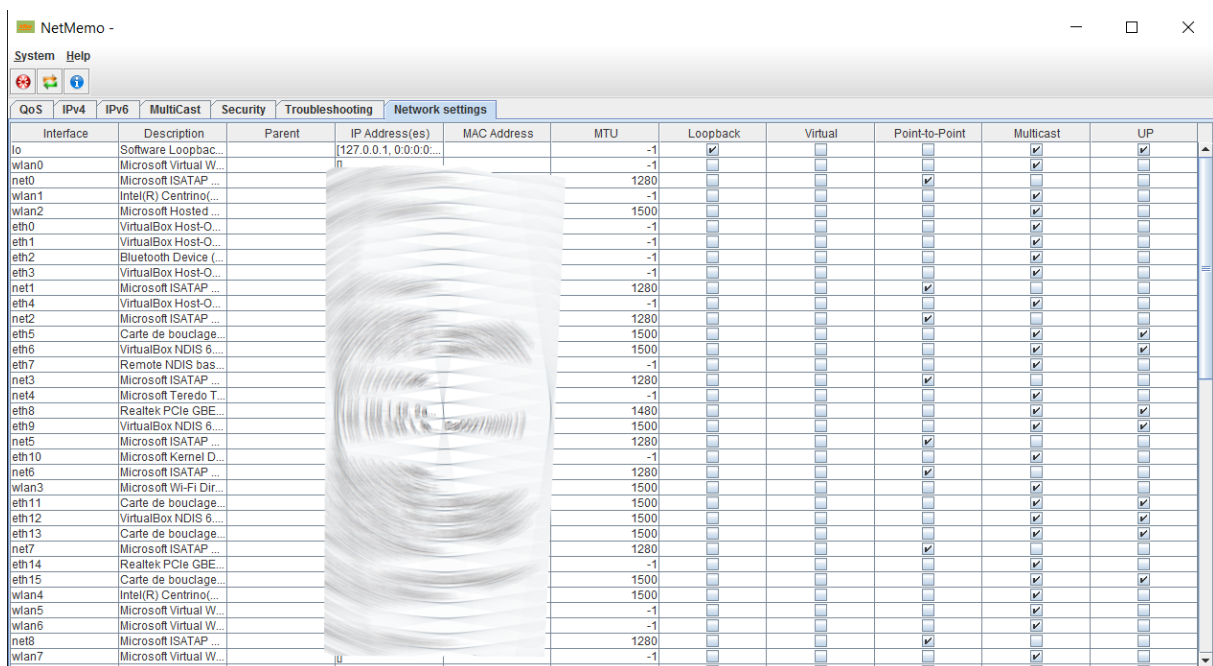


Figure 13 - A view of the Network settings tab