


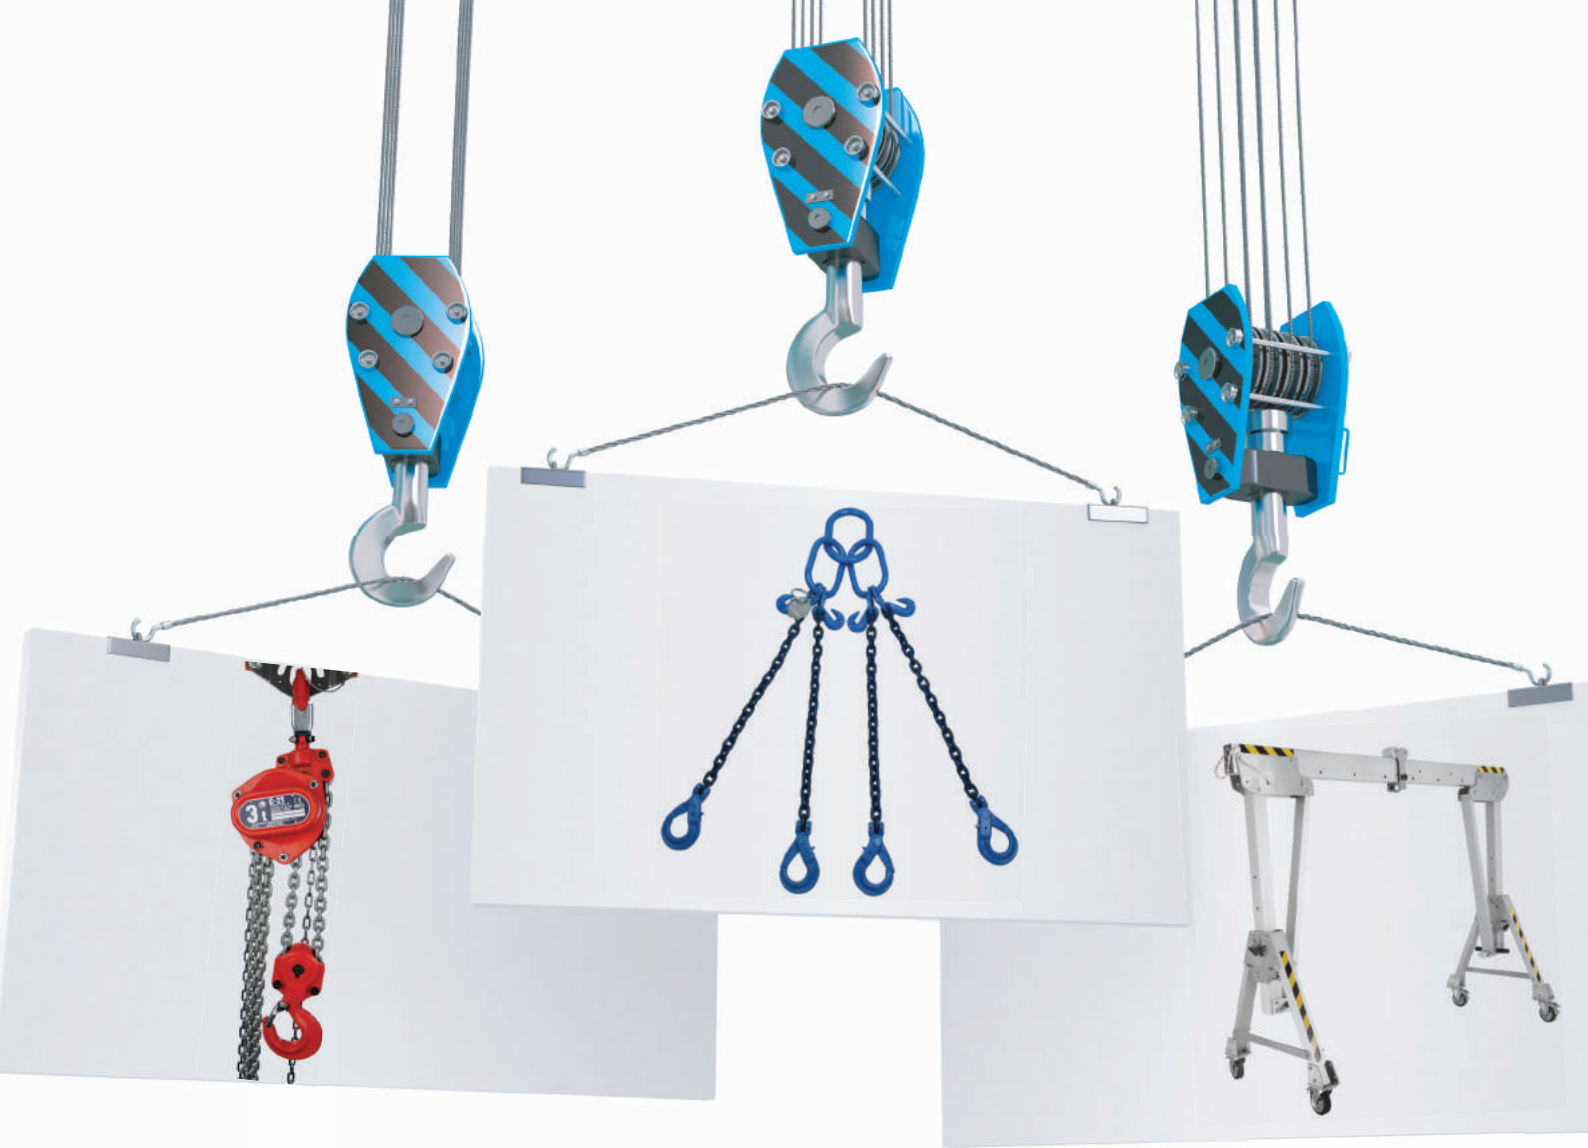

YOUR SINGLE SOURCE FOR **LIFTING & RIGGING** EQUIPMENT

 **SAFETYLIFTINGGEAR.COM**

SALES | HIRE | TESTING | REPAIRS

Adjustable Beam Trolley



- Available from 0.5-5 tonne
- Fits beam flanges width 50-220mm
- Extra wide version available

Geared Beam Trolley



- Available from 0.5-5 tonne
- Supplied with 3mtrs of hand chain (longer lengths available)

Elephant Beam Trolley



- Available from 0.5-2 tonne
- Solid carbon steel design
- Geared model also available

Adjustable Trolley Clamp



- Available from 1-5 tonne
- Easily adjustable to fit most beams
- Locking lever secures adjustment

Adjustable Beam Clamps



- Available from 1-10 tonne
- Adjustable from (70mm - 245mm)
- Design minimises flange stress

Elephant Multi-directional Screw Clamp



- Available 1, 2 & 3 tonne
- Two lifting holes, allows for vertical or horizontal lifts

Quick Fit Beam Clamp



- Available in 1-10 tonnes
- Beam width from 76-305mm
- Fast & Easy to Fit

Vertical Plate Clamp



- Available from 0.5-5 tonne
- Hardened steel jaws
- Locking mechanism

Horizontal Plate Clamp



- Available from 1.5-5 tonne per pair
- Maximum sling angle 0-45° from the vertical

CAMLOK CZ 'HEAVY DUTY' Plate Clamp



CAMCO
COLUMBUS MCKINNON

- Available from 1-12 tonne
- Ideal for transporting sheet metal & steel plates vertically


CAMLOK LJ NON-MARKING Plate Clamp



CAMCO
COLUMBUS MCKINNON

- Available 0.5 and 1.5 tonne
- For lifting various materials without marking or damaging

Lifting Magnet

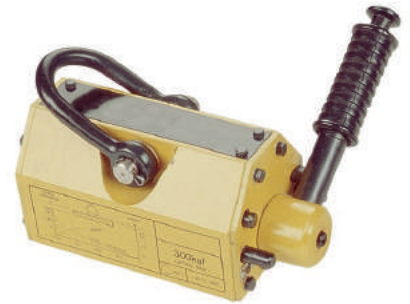

- Available from 100-2000kg
- High attractive force
- No power required

Liftingear Chain Block



- Available from 0.5-30 tonne
- Height of lift from 3-30mtrs
- Captive bearings on load wheel
- Heavy duty & industrial quality

Elephant Chain Block



ELEPHANT
MADE IN JAPAN

- Available from 0.5-5 tonne
- Height of lift from 3-30mtrs
- New super strength, Stronger Load Chain Grade+V 105kgf/mm2

Yale 360 Degree Chain Block



Yale
Industrial Products

- Available from 0.5-3 tonne
- Height of lift from 3-15mtrs
- Can be operated at the side of the load or from any other position

Liftingear Lever Hoist



- Available from 0.25-9 tonne
- Height of lift from 1.5-6mtrs
- Longer height of lift available
- Rubberised handle for comfort

Elephant Lever Hoist



ELEPHANT
MADE IN JAPAN

- Available from 0.25-9 tonne
- Height of lift from 1.5-6mtrs
- Longer height of lift available
- Rubberised handle for comfort

Yale D85 Lever Hoist



Yale
Industrial Products

- Available from 0.75-6 tonne
- Standard 1.5mtr height of lift
- Machined chain pockets for a accurate fit

Wire Rope Hoist



- Available in 230, 300 & 500kg
- Available in 110v & 240v
- Height of lift respectively 28, 60 & 40mtrs

Elephant Electric Chain Hoist



- Maximum Capacity 200kg
- Height of lift from 3-10mtrs
- Lift speed 3.78mtrs per minute
- Available in 110v & 240v

Electric Chain Hoist



1
tonne
Model

- Available from 250-1000kg
- Height of lift from 3-40mtrs
- 110v & 240v models
- Supplied with chain bag

Radio Controlled Electric Hoist



- Available from 0.25-1 tonne
- Height of lift from 3-40mtrs
- 110v or 240v models available
- Transmitter range of 100mtrs

CM Lodestar Electric Hoist



- Available in 0.5-3 tonne
- Height of lift from 3-30mtrs
- Thermal overload protection
- 110volt power supply

Battery Powered Chain Hoist



- Available in 250kg & 500kg
- Height of lift from 3-10mtr (250kg)
- Height of lift 5mtr (500kg)
- 2x Rechargeable Li-ion battery

Fixator 500kg Electric Wire Hoist with Remote Control



- Lifting Speed: 8m/min
- Transmitter Range: 100 metres
- Lift Height 20, 30, 60mtr & 120mtr
- Pendant option also available

Yale CPV Chain Hoist



- Available in 250, 500 & 1000kg
- Height of lift from 3-15mtrs
- Standard operating 400v, 3Ph, 50hz

YALE 3 phase Electric Hoist with Powered Trolley



- Available in 250, 500 & 1000kg
- Height of lift from 3-15mtrs
- Supplied with powered trolley
- Standard operating 400V, 3Ph, 50hz

Budget 500kg 240v Electric Chain Hoist



Electric Wire Rope Hoist



Electric Wire Rope Hoist 150kg



- Maximum Capacity 500kg
- Height of lift from 3-10mtrs
- 240volt power supply
- Lifting speed 3mtrs/min

- Available in 125kg & 200kg
- Height of lift 18mtrs
- 240volt power supply
- Lifting speed 8mtrs/min (single)

- SWL of 150kgs & a HOL of 12mtrs it can also be doubled up to 300kg SWL with a HOL 6mtrs by means of additional Hook and Pulley

Grade 80 Chainslings



Latch Hook



Safety Hook



Swivel Hook



Our grade 80 Chainsling are available in 1, 2, 3 & 4 leg
The safe working loads range from 1.5 - 31.5 tonne
Supplied with latch or safety hooks, swivel hooks also available
Grade 80 chainslings can be assembled to your own requirements

Grade 100 Chainslings



Latch Hook



Safety Hook



Our grade 100 chainslings are available in 1, 2, 3 & 4 leg
The safe working load ranges from 1.4 - 14.1 tonne
Available with latch or safety hooks
Grade 100 has a 25% higher W.L.L than grade 80
Grade 100 chainslings can be assembled to your own requirements

Lifting Tripod / Shear Legs



- Available in 500kg & 1 tonne models
- Fully Adjustable height
- Includes Security anti slip chain the for base
- Optional storage bag available
- Lightweight aluminium construction with a steel head and lifting point

Adjustable Portable Gantry



- Available in 500, 1000 & 2000kg models
- Fitted with 4 swivel locking castors
- Gantry is NOT to be moved whilst under load
- All steel construction with I-Beam cross member for added strength
- Height adjustable from 2400-3600mm in 100mm increments

Builders Gantry Hoist Package



- Available with a 300kg or 500kg Hoist
- Gantry system with frames (included a gate for safe working at height)
- Hoist includes integral Trolley & Counter balance weight buckets (allows unit to be free standing)
- Totally portable, lightweight and easy to erect

Aluminium Gantry



- Beam length from 2 to 7 metres
- Support height: three basic types - A1 / B1 / C1
- Working load limit (WLL) from 1500kg - 3500kg
- Safety factor for lifting loads: 2,1:1
- Safety factor for personal rescue: 10:1
- Protection for max of 5 people at the same time

Container Lifting Lugs Set of 4



- 2x Left Hand Lifting Lugs
- 2x Right Hand Lifting Lugs
- WLL Per Set of 4 = 50 tonne
- Lifting hole diameter 70mm

CAMLOK CLB Lugs for Side Lifting



CALCO
COLUMBUS MCKINNON

- Supplied in sets of 4
- Lifting capacity of up to 50 tonne
- This model has a spring loaded bolt to prevent accidental release

CAMLOK CLT Lugs for Top Lifting



CALCO
COLUMBUS MCKINNON

- Supplied in sets of 4
- Lifting capacity of up to 56 tonne
- Vertically mounted in the hole at the top of the container

G80 Lifting Clutch



- Grade 80 Lifting Clutch
- Available from 1-20 tonnes WLL
- For the use of pre cast concrete staircases & columns etc.

G80 Ring Clutch



- Available in 2.5 & 5 tonne WLL
- Grade 80 with Manual release
- For the use of pre cast concrete staircases & columns etc.

Pipe Hooks (Pair)




- Supplied in Pairs
- Available in 3, 6 & 8 tonne pairs
- Polyurethane surface protection

Man Hole Lifting Pin



- 1.5 tonne lifting pin
- Normally used in sets of 3
- Easy attach retaining clip
- Pins are sold individually

Manhole Lifting Pin Automatic Quick Release

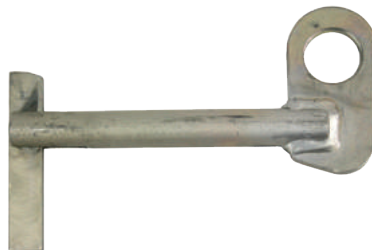

- Capacities from 750-1500kg
- Pin Diameters 25, 30, 35 & 38mm
- Automatic drop latch secures the pin in the manhole

Wheelbarrow Lifting Chains



- Lifts wheel barrows up to 250kg
- Easy to Attach & Detach
- Two rings for the handles & a pig tail hook for the front

EM200 Scaffold Hoist



- Maximum Capacity 200kg, 110v
- Rope diameter 5mm
- Height of lift of 25 metres
- Lift speed 23 metres per minute
- 12month warranty

TM235 Scaffold Hoist



- Maximum Capacity 200kg, 110v
- Rope diameter 5mm
- Height of lift of 25 metres
- Lift speed 23 metres per minute
- 12month warranty

Radio Controlled Scaffold Hoist



- Maximum Capacity 200kg, 110v
- Transmitter range 100 metres
- Height of lift of 25 metres
- Lift speed 23 metres per minute
- 12month warranty

200kg 110volt Ladder Hoist



- Lifting capacity 200kg
- Speed: 22mtrs/min
- Base structure 7.8mtr
- Platform size: 680 x 910 x 500mm

Hoist Tipping Bucket



- Available in 60, 100 & 150Ltr
- Simple locking mechanism
- Heavy duty construction from quality materials

Mortar Tub



- 250ltr Mortar Tub
- Available as Crane Lift or Crane/Fork Lift
- Supplied fully tested and certified

Self Balancing Crane Fork MBA-20A



- Working Load Limit 2 tonne
- Adjustable fork width 340-1600mm
- Locking mechanism to secure fork position

Self Balancing Crane Fork MBRA20



- Working Load Limit 2 tonne
- Adjustable Fork width 300-1200mm
- Adjustable Height 1200-1800mm
- Facility to attach a protection net

Fitting Bag (Lifting Bag) 30kg



- Safe Working Load 30KG
- Polypropylene Lifting Bag
- Bag opening 400mm
- Each bag has its own serial number

Adjustable Slab Gripper 20kg



- Capacity 20kg
- Adjustment 200-300mm
300-400mm
400-500mm

200kg Kerb Grab



- Capacity 200kg
- Range 500-1000mm
- Option to lift manually by 2 people or using a crane / hoist

500kg Kerb Grab



- Capacity 500kg
- Range 30-200mm
- Option to lift manually by 2 people or using a hoist

TSZ-UNI 600kg Kerb Grab



- Working load limit 600kg
- Lifting eye to attach to crane hook
- Gripping range 50-600mm
- Gripper length 350mm

1000kg Kerb Grab



- Capacity 1000kg
- Rotating rubber coated plates
- Ideal for lifting from the horizontal position to vertical

Block Grab 1800kg with Safety Net Facility



- 1800kg Block Lifting Grab
- Fully automatic function
- Adjustable for different size packs
- Side handles for steadying

Gin Wheel & Ropes



- Rope length 20, 30 & 50mtrs
- Supplied with 1 Gin Wheel
- Maximum rope diameter 20mm
- Capacity 250 kg

Pulley Block with brake & rope



- Maximum lifting weight 100kg
- Available in 20, 30 & 50mtr length
- Rope diameter 14mm
- Rope with hook and safety catch

Polyprop Rope



- Available in 6, 8, 10, 12 & 16mm
- Lengths Available 30, 100, 220mtr
- Not for fall protection or lifting
- Blue polyprop rope

Polyester Round Slings



- Available lengths 0.5-10mtrs
- Capacities from 1-30 tonne
- Safety factor 7:1
- Complies with EN 1492-2 2000 CE

Polyester Webbing Slings



- Available lengths 1-20mtrs
- Capacities from 1-20 tonne
- Safety factor 7:1
- Complies with EN 1492 CE

Round & Webbing Sling Hooks



- Available in 1, 2, 3 & 5 tonne
- Hooks colour coded to match slings
- Can be used as a link to join two Slings Together

Bow Shackles



- Available from 0.33-85 tonne
- Steel, Black & Green Pin Finish Available
- Safety & Screw Pin
- Steel shackle meets BS3032
- Supplied fully certified



Large Dee Shackle



- Available from 0.5-7 tonne
- Meets the performance requirements of BS3032
- Supplied fully certified

Long Bodied Piling Shackle



- Available from 1-5 tonne
- Self-colour finish
- Supplied fully certified

Wire Rope Sling




- Available from 400-5700kg
- Lengths from 1-10 metres
- Stamped with SWL & Serial Number

Modulift Spreader Beam



- Available in 12, 24, 34, 50 & 70 tonne
- Span beam ranges from 1mtr-12mtrs
- Supplied with:
1x pair of End Units and Drop Links,
4x Alloy Bow Shackles (tonnage of shackles will vary depending on the beam purchased)
- Used by many of the leading rental and crane hire companies
- Supplied fully tested and certified

Modulift®
working between the hook and the load

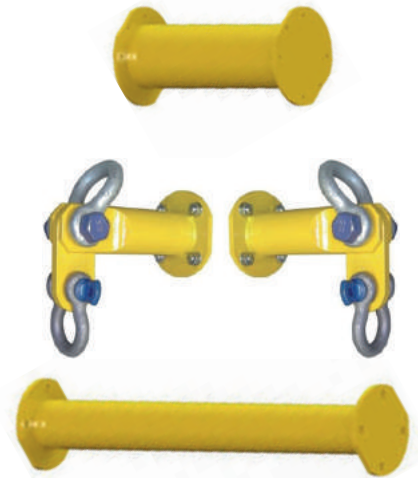

Excavator Hook



- Weld on hook
- Available from 2-10 tonnes
- Heavy duty safety catch
- Replacement catches available

Weld On Deck Plates



- Available from 2-20 tonnes
- Forged from high tensile steel
- Extremely popular as they are easy to weld onto surfaces

Weld On Lifting Point with Spring



- Available from 1.12-8 tonne
- Suitable for lifting and lashing applications such as excavators, low loaders, lifting beams

Dynamo Eyebolt



- Available sizes M10, M12 & M20
- Fully certified for lifting

Drop Forged Collared Eyebolt



- Available sizes from M06-M36
- Also Available in long shank

Eyenuts



- Available sizes from 8-36mm
- Rated for lifting applications
- Supplied fully certified

Swivel Lifting Point



- Diameters from 8-36mm
- Thread lengths from 13-35mm
- Also available in longer threads

G100 Swivel Load Ring



- Available in sizes from M8-M36
- Lifting capacities 0.63-8 tonne
- Fastening at 90 degrees

RUD WBG-V Swivel Lifting Point



- Available from 8-30mm
- Lifting Capacities 0.3-5 tonne
- Can be loaded in all directions with a 4:1 design factor

RUD VRS-F Starpoint Eyebolt



- Available from 8-36mm
- capacities from 0.3-7 tonne
- Can be fixed in position and is adjustable by disengaging the StarKey (locking device)

RUD VLBG Swivel Load Ring



- Available from 8-36mm
- Lifting capacities 0.3-8 tonne

RUD VLBS-U Load Ring



- Available from 1.5-10 tonne
- Grade 100
- A protected spring keeps the ring bracket in every required position without tipping

RUD VRBS Load Ring



- RUD VRBS Load Ring for welding
- Available from 4-10 tonne
- The ring latch can be tilted by 180°
- Made of high-tensile material

Ratchet Loadbinder



- Fitted with grab hooks for easy connection
- Loadbinders range with 8-16mm chain

EN12195-3 Ratchet Loadbinder



- Available in 8mm, 10mm & 13mm
- Conforms to EN12195-3
- Fitted with grab hooks with locking pins for easy connection

Loadbinder Kit with Latch Hooks



- Available in 8000-20,865kg M.B.S
- Lengths ranging from 3-10mtrs
- Grade 80 chain & components

Loadbinder Kit with Grab Hooks



- Available in 8000-20,865kg M.B.S
- Lengths ranging from 3-10mtrs
- Grade 80 chain & components

Grade 80 Lifting Chain



- Grade 80 lifting chain
- Chain diameter from 7-20mm
- M.B.S is 4 times the W.L.L
- Conform to BS EN 818-2

Grade 100 Lifting Chain



- Grade 100 lifting chain
- Chain diameter from 6-13mm
- M.B.S is 4 times the W.L.L
- Conform to BS EN 818-2

Loadbinder Grab Hook



- Available in 10mm & 13mm
- Clevis Type Connection
- Simple Way to Shorten Loadbinder Chains

Load Binder Slip Hook



- Available in 10mm & 13mm
- Clevis Type Connection
- Wide open mouth for easy connection

HW2500 Hand Winch



- Capacity 2500lb
- Wire Rope Length 7.6mtrs
- One-piece gear for heavy duty use
- Heavy duty frame with safety latch

HW2500S Hand Winch



- Capacity 2500lb
- Webbing length 6mtrs
- High strength webbing
- Fitted with claw hook end

Hand Winch Type A



- Capacities 150, 300, 500 & 1000kg
- Can be supplied without rope
- Lengths from 10-40mtr depending on the model

Hand Winch Type B



- Capacities 250, 500 & 1000kg
- Can be supplied without rope
- Lengths from 10-40mtr depending on the model

250kg Manual Hand Winch



- Available in 20 & 25mtrs
- Lifting Capacity 250kg
- Equipped with Automatic Brake
- Galvanized steel wire rope

Harken 500kg Rigger's Winch



- 500kg Safe Working Load
- Multiple mounting options
- Product Weight: 7kg
- **Rope Sold Separately**

Portable Battery Powered Winch



- Lifting/Pulling capacity: 100/400kg
- Rope length: 4.6mtr
- Speed: 5mtrs/min
- Product Weight: 8.2kg




Yale LMG Cable Grip




- Available in 3 different sizes
- 4.5-8.4mm Pulling force 2000 daN
- 8.4-15mm Pulling force 3000 daN
- 15-28mm Pulling force 5000 daN

Electric Vehicle Winch 1500lbs

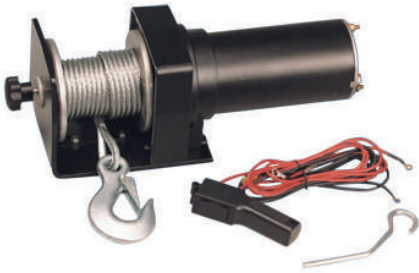

- Rated Line Pull 1500lbs (682kgs)
- Rope 4mm x 7.6mtrs length
- Free spooling clutch
- 12v DC 0.6KW/0.8HP
- Gear Ratio 153:1

Electric Vehicle Winch 2500lbs

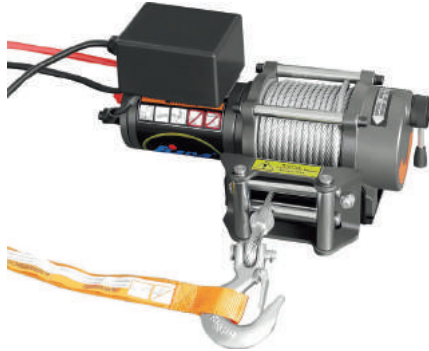

- Rated Line Pull 2500lbs (1136kgs)
- Rope 5.1mm x 14mtrs length
- Free spooling clutch
- 12v DC 0.9KW/1.2HP
- Gear Ratio 253:1

Electric Vehicle Winch 5000lbs



- Rated Line Pull 5000lbs (2272kgs)
- Rope 6mm x 24mtrs length
- Free spooling clutch
- 12v DC 1.7KW/2.3HP
- Gear Ratio 294:1

DU-500S Electric Winch



- Available in 110 or 240 volts
- Lifting capacity 500kg
- Fitted with 6mm x 30mtr rope
- Duty cycle 30%
- Compact high performance winch

Wire Rope Winch



- Rope fitted with latch hook
- Aluminium Body (For Lightness)
- 20, 30, & 50mtr ropes available
- Available in 800, 1600, 3200 & 5400kg (Includes handle)

Battery Powered Winch



- Battery operated winch/hoist kit
- Pulling power 750kg
- Rope length 15mtr
- 2x Rechargeable LI-ION batteries
- Supplied with storage case

8 Tonne Swing Block



- Swing out plates pivot at pulley shaft for easy engagement & disengagement from winch cable
- Suits cable diameter up to 14.5mm

Snatch Blocks



- Available from 2-12 tonne
- Available in either hook or shackle
- Drop forged wheel

2 tonne Heavy Duty Wire Rope Cable Puller



- Rated load 2 tonne
- Pulling distance 1300mm
- Rope: 7x1500mm Length
- Weight 3.8kg

Standard & Low Profile Cylinders



- Available from 10-200 tonne
- Strokes 50, 100 & 150mm
- Maximum pressure 700 Bar
- Female hydraulic coupler

Pad Jacks



- Available from 10-200 tonne
- Strokes vary from 11-20mm
- Maximum pressure 700 Bar
- Female hydraulic coupler

Hollow Cylinders



- Available from 20-100 tonne
- Strokes 50, 75 & 100mm
- Maximum pressure 700 Bar
- Female hydraulic coupler

Lock Nut Cylinder



- Capacity 30 tonne
- Strokes 100mm
- Maximum pressure 700 Bar
- Female hydraulic coupler

Manual Hand Pumps



- 1.8mtr hose with male coupling
- 2 speeds low & high
- Working pressure 700 Bar
- Aluminium version also available

Manifolds



- Available as 2 or 4-way manifold
- 1.8mtr hose in length
- Fitted with shut off valves
- Female coupling on manifold block

Hydraulic Wedge Spreader



- Spreading force of up to 14 tonne
- Tip clearance 6mm
- Max spread 81mm
- Coupler and dust cap

Hydraulic Pipe Bender Kit



- 6 tonne cylinder 150mm stroke
- 10, 13, 20 & 25mm Dies
- Suitable for pipe wall thickness of 1.5-3.5mm

Hydraulic Nut Splitters



- 14 tonne hydraulic ram
- To suit nuts from 8-24mm
- High flow female coupling to fit direct to a hand pump

Bottle Jacks



- Available from 2-30 tonne
- Complete with handle
- Adjustable screw ram cap
- Overload pressure valve

Hydraulic Toe Jacks



- Available in 2.5-15 tonne on toe
- Complete with handle
- Capacity doubles when lifting on the head

Swivel Type Toe Jack



- Available in 5 & 10 tonne
- Lifts from head or toe
- Ideal for use in confined areas
- Toe swivels for easy alignment

Farm Jacks



- Available in bar length 48" & 60"
- Capacity 3.5 tonne at 12"
- 3/4" lift with each handle stroke
- Shear pin prevents overloading

Trolley Jacks



- Available in short or long bodies
- Capacities from 2-10 tonne
- Heavy duty jacks available

Folding Floor Crane



- Capacity from 0.5-2 tonne
- Fitted with wheels for portability
- Legs fold for compact storage

Counter-balance Floor Crane



- Maximum capacity 550kg
- 5 variable capacity settings
- Easily removable weights
- Heavy duty swivel hook fitted with safety Catch

Hydraulic Puller Kit with pump



- Available from 10-50 tonne kit
- Can be use with 2 or 3 legs
- Kit comes with cylinder, hand pump, hose, pulling arms and locking collar

Hydraulic Pullers



- Available from 5-50 tonne
- Come with hydraulics, pulling arms and storage case
- The puller can be used with either 2 legs or 3 legs

Cambuckle Lashing / Load Restraint Strap



- 400kg Minimum breaking strain
- Available in 1, 2, 4 & 6mtrs
- High strength polyester webbing
- 25mm width, LC 200 daN

400kg S Hook Ratchet Lashing



- "S" Hooks at both ends
- 25mm wide Webbing
- Tough reliable & hard wearing
- Quality positive ratchet

Endless Ratchet Lashing



- Available from 500-5000kg
- High Strength Webbing
- Lengths of 4 & 6mtrs
- Complies to EN 12195-2

Ratchet Lashing with Claw Hooks



- Available from 500-3000kg
- Available in lengths of 4 & 6mtrs
- Comes with claw hook
- Complies to EN12195-2

Rat Strap 5 tonne Ratchet Lashing



- 5000kg Minimum breaking strain
- Available in lengths from 4-20mtrs
- 50mm webbing width with chassis hooks at either end

Premium 5 tonne Ratchet Lashing



- 5000kg Minimum breaking strain
- Available from 4-20mtrs
- Fitted with Claw Hooks each end
- Also stocked in Delta & Rave Hook

10 tonne Ratchet Lashing



- 10,000kg Minimum breaking strain
- Available from 6-15mtrs
- Fitted with Claw Hooks each end
- Hard wearing Webbing 75mm wide

Forged Snap Hook



- Forged Carbon Steel
- Pressed Steel Latch
- Two sizes available 7/16" (340kg) & 9/16" (450kg)

Commercial D Shackle



- Available from 5-25mm
- Commercial D Shackle (untested)
- Zinc Plated
- Not rated for lifting

Carbine Hook (Untested)



- Available from 5-14mm
- Zinc Plated
- Not rated for lifting

Quick Link Zinc Plated



- Available from 5-12mm
- Threaded Gate Lock
- Not rated for lifting
- Zinc plated

Drop Forged Straining Screw Eye



- Available from 6-12mm
- Eye and eye end fitting
- Standard: DIN 1480
- Not rated for lifting

Drop Forged Straining Screw Hook



- Available from 6-12mm
- Hook and Hook end fitting
- Standard: DIN 1480
- Not rated for lifting

Stainless Steel Dee Shackle



- 1000kg Working Load Limit
- Shackle to suit pump chains
- Material diameter: 9.5mm
- Supplied fully certified

Galvanised Pump Lifting Chain



- Available from 500-2000kg
- Chain lengths from 2-30mtrs
- Fitted with Master Ring at each end and at 1mtr centres

Stainless Steel Pump Lifting Chain



- Available in 630kg & 1250kg
- Chain lengths from 2-30mtrs
- Fitted with Master Ring at each end and at 1mtr centres