


Hoist with the Hook

0.5 TON TO 5 TON

CE

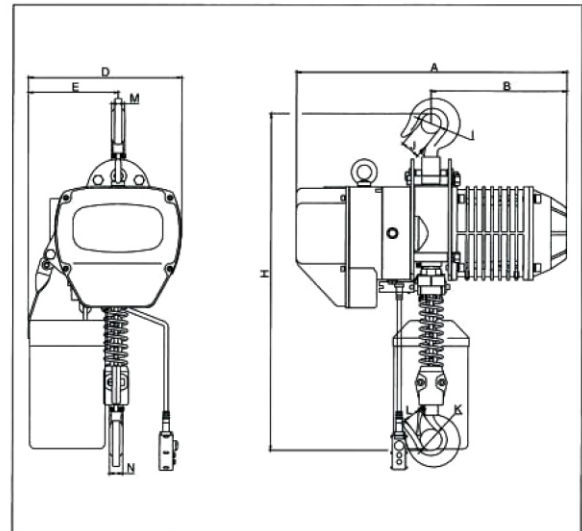

Hoist with the Hook

● Technical Parameters

Type	Capacity (Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting motor					Operating motor					I-Beam (mm)	
				Power (kw)	Rotation Speed(r/min)	Phases	Voltage(V)	Frequency (Hz/s)	Power (kw)	Rotation Speed(r/min)	Operating speed(m/min)	Phases	Voltage(V)		Frequency (Hz/s)
SL0.5-01S	0.5	6	7.2	1.1	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL01-01S	1	6	6.8	1.5	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL01-02S	1	6	3.6	1.1	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL02-01S	2	6	6.6	3.0	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL02-02S	2	6	3.4	1.5	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL03-01S	3	6	5.6	3.0	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL03-02S	3	6	3.3	3.0	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL03-03S	3	6	2.2	1.5	1440	3	220-440	50/60	/	/	/	/	/	/	/
SL05-02S	5	6	2.8	3.0	1440	3	220-440	50/60	/	/	/	/	/	/	/


● Size specification

Type	Capacity (Ton)	Unit(mm)											
		H	A	B	D	E	I	J	K	L	M	N	Chain
SL0.5-01S	0.5	550	460	230	280	160	Φ32	25	Φ32	Φ25	17	17	Φ6.3
SL01-01S	1	600	520	260	300	176	Φ40	31	Φ40	Φ31	24	24	Φ7.1
SL01-02S	1	670	460	230	280	205	Φ40	31	Φ40	Φ31	24	24	Φ6.3
SL02-01S	2	800	620	310	430	265	Φ49	35	Φ49	Φ35	30	30	Φ10.0
SL02-02S	2	750	520	260	300	230	Φ49	35	Φ49	Φ35	30	30	Φ7.1
SL03-01S	3	845	620	310	430	265	Φ59	42	Φ59	Φ42	35	35	Φ11.2
SL03-02S	3	950	620	310	430	320	Φ59	42	Φ59	Φ42	35	35	Φ10.0
SL03-03S	3	1000	520	260	350	280	Φ59	42	Φ59	Φ42	35	35	Φ7.1
SL05-02S	5	1030	620	310	430	325	Φ60	45	Φ60	Φ45	43	43	Φ11.2

Hoist with the Trolley

0.5 TON TO 5 TON

CE

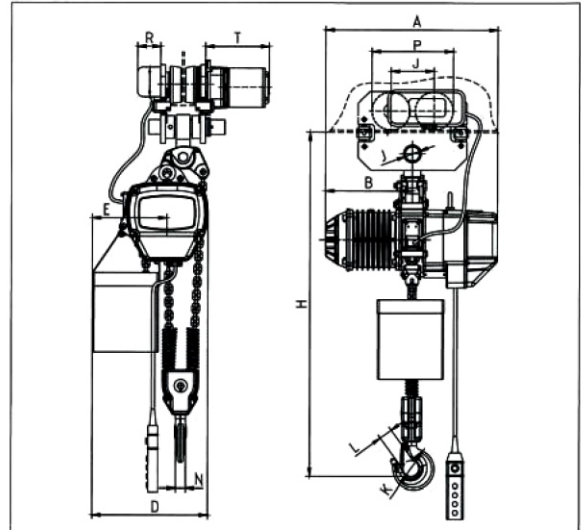

Hoist with Electric Trolley

● Technical Parameters

Type	Capacity (Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting motor					Operating motor					I-Beam (mm)	
				Power (kw)	Rotation Speed(r/min)	Phases	Voltage(V)	Frequency (Hz/s)	Power (kw)	Rotation Speed(r/min)	Operating speed(m/min)	Phases	Voltage(V)		Frequency (Hz/s)
SL0.5-01S	0.5	6	7.2	1.1	1440	3	220-440	50/60	0.2	1440	14	3	220-440	50/60	70-130
SL01-01S	1	6	6.8	1.5	1440	3	220-440	50/60	0.4	1440	10/20	3	220-440	50/60	80-160
SL01-02S	1	6	3.6	1.1	1440	3	220-440	50/60	0.4	1440	10/20	3	220-440	50/60	80-160
SL02-01S	2	6	6.6	3.0	1440	3	220-440	50/60	0.4	1440	10/20	3	220-440	50/60	82-178
SL02-02S	2	6	3.4	1.5	1440	3	220-440	50/60	0.4	1440	10/20	3	220-440	50/60	82-178
SL03-01S	3	6	5.6	3.0	1440	3	220-440	50/60	0.4	1440	10/20	3	220-440	50/60	100-180
SL03-02S	3	6	3.3	3.0	1440	3	220-440	50/60	0.4	1440	11/21	3	220-440	50/60	100-180
SL03-03S	3	6	2.2	1.5	1440	3	220-440	50/60	0.4	1440	11/21	3	220-440	50/60	100-180
SL05-02S	5	6	2.8	3.0	1440	3	220-440	50/60	0.75	1440	10/20	3	220-440	50/60	110-180


● Size specification

Type	Capacity (Ton)	Unit(mm)													
		H	A	B	D	E	I	J	P	K	L	N	R	T	Chain
SL0.5-01S	0.5	630	460	230	280	160	Φ31	100	162	Φ32	25	17	142	150	Φ6.3
SL01-01S	1	650	520	260	300	176	Φ31	111	206	Φ40	31	24	142	231	Φ7.1
SL01-02S	1	640	460	230	280	205	Φ31	111	206	Φ40	31	24	142	230	Φ6.3
SL02-01S	2	770	620	310	430	265	Φ36	127	237	Φ49	36	30	142	231	Φ10.0
SL02-02S	2	740	520	260	300	230	Φ36	127	237	Φ49	35	30	142	231	Φ7.1
SL03-01S	3	840	620	310	430	265	Φ43	140	265	Φ59	42	35	142	231	Φ11.2
SL03-02S	3	940	620	310	430	320	Φ43	140	265	Φ59	42	35	142	231	Φ10.0
SL03-03S	3	920	520	260	350	280	Φ43	140	265	Φ59	42	35	142	231	Φ7.1
SL05-02S	5	1015	620	310	430	325	Φ54	156	296	Φ60	45	43	142	231	Φ11.2

Hoist with the Hook

10 TON

CE

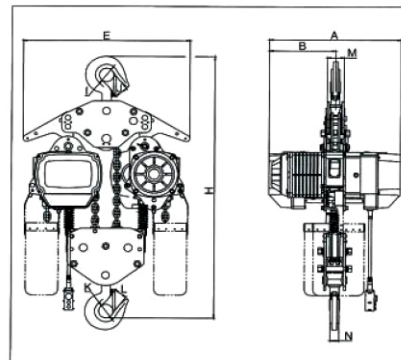

Hoist with the Hook

● Technical Parameters


Type	Capacity (Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting motor					Operating motor					I-Beam (mm)	
				Power (kw)	Rotation Speed(r/min)	Phases	Voltage(V)	Frequency (Hz/s)	Power (kw)	Rotation Speed(r/min)	Operating speed(m/min)	Phases	Voltage(V)		Frequency (Hz/s)
SL10-04S	10	6	2.8	3.0x2	1440	3	220~440	50	/	/	/	/	/	/	/

● Size specification

Type	Capacity (Ton)	Unit(mm)										
		H	A	B	E	I	J	K	M	L	N	Chain
SL10-04S	10	1400	630	315	890	Φ90	70	Φ90	107	65	50	Φ11.2

Hoist with the trolley

10 TON

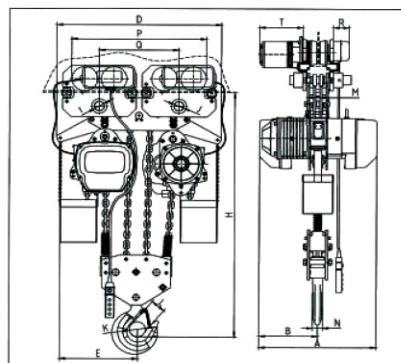

Hoist with Electric Trolley


● Technical Parameters

Type	Capacity (Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting motor					Operating motor					I-Beam (mm)	
				Power (kw)	Rotation Speed(r/min)	Phases	Voltage(V)	Frequency (Hz/s)	Power (kw)	Rotation Speed(r/min)	Operating speed(m/min)	Phases	Voltage(V)		Frequency (Hz/s)
SL10-04S	10	3/9	2.8	3.0x2	1440	3	220-440	50	0.75	1440	10	3	220-440	50	150-220

● Size specification

Type	Capacity (Ton)	Unit(mm)															
		H	A	B	D	E	I	J	K	L	M	N	P	Q	R	T	Chain
SL10-04S	10	1200	630	315	860	430	Φ54	Φ54	Φ90	65	85	50	726	430	142	231	Φ11.2

Hoist 15 TON

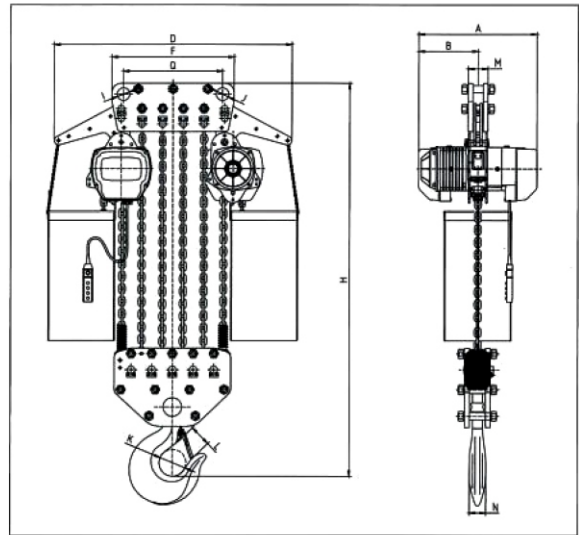

● Technical Parameters

Type	Capacity (Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting motor					Operating motor					I-Beam (mm)	
				Power (kw)	Rotation Speed(r/min)	Phases	Voltage(V)	Frequency (Hz/s)	Power (kw)	Rotation Spedd(r/min)	Operating speed(m/min)	Phases	Voltage(V)		Frequency (Hz/s)
SL15-06S	15	6	1.8	3.0x2	1440	3	220-440	50/60	0.75x2	1440	11/21	3	220-440	50/60	150-220

● Size specification

Type	Capacity (Ton)	Unit(mm)												
		H	A	B	D	E	I	J	K	L	N	M	Q	Chain
SL15-06S	15	1310	630	315	1070	590	Φ 70	Φ 70	Φ 110	80	85	88	520	Φ 11.2