



升威LE-RELAX

中国·中山



1986 年

始创于香港

100000 m²

生产面积

1200 +

公司成员

36 载

发展历程



ABOUT LE-RELAX

关于我们

镇升玻璃制品（中山）有限公司以生产玻璃深加工、幕墙玻璃、室内装饰玻璃。

镇威五金玻璃制品（中山）有限公司以研发、生产铝门窗制品、淋浴房、五金制品、不锈钢加工及幕墙工程。

两家公司同为一体多元化的港资企业，公司在香港始建于1986年，现位于广东省中山市港口镇迎富二路86号，生产基地面积达10万多平方米，拥有1200多人的团队。凭借着富有创意的资深设计开发队伍，完善的生产管理体系，设备精良的生产线，快捷便利的物流车队，精湛的工艺。经过30多年的发展与积聚，公司自强不息，产品始终顺应世界潮流并拥有自主品牌——升威 LE-RELAX。

公司建立了覆盖式的销售网络遍及港、澳、全国及世界各地。

升威 LE-RELAX 品牌达到国家及相关国际标准并通过认证。成为同行业佼佼者。

Zhensheng glass products (Zhongshan) Co., Ltd. produces glass deep processing, curtain wall glass and interior decoration glass.

Zhenwei hardware and glass products (Zhongshan) Co., Ltd. develops and produces aluminum door and window products, shower room, hardware products, stainless steel processing and curtain wall projects.

The two companies are a diversified Hong Kong funded enterprise. The company was founded in 1986 in Hong Kong and is now located at No. 86, Yingfu Second Road, Gangkou Town, Zhongshan City, Guangdong Province. The production base covers an area of more than 100000 square meters and has a team of more than 1200 people. With a creative senior design and development team, perfect production management system, well-equipped production line, fast and convenient logistics team and exquisite technology. After more than 30 years of development and accumulation, the company is constantly striving for self-improvement. Its products always conform to the world trend and have its own brand - Shengwei le-relax.

The company has established a sales network covering Hong Kong, Macao, the whole country and all over the world.

Shengwei le-relax brand has reached national and relevant international standards and passed certification. Become a leader in the same industry.

EXHIBITION HALL

公司展厅



PRODUCTION EQUIPMENT

生产设备



全自动玻璃切割机



45度角双头锯开料



玻璃生产车间



水平钢化玻璃双室炉



钢化玻璃均质炉

CERTIFICATE OF HONOR

荣誉证书



GLOBAL STRATEGIC PARTNERS WORK TOGETHER

全球战略合作伙伴



信义玻璃



富球铝材



德国泰诺风



德国瑞纳斯五金



意大利雷圭蒂五金



德国好博



德国格屋



丹麦斯坦福



老虎粉末涂料

我们始终坚持以客户为中心而开展一切工作，要秉持真心，时刻关注客户的需求。精选来自全球优秀供应商，以强大的技术力量团队，稳定的产品质量和诚信可靠的供货信誉，服务客户。

We always adhere to the customer-oriented and carry out all work, to uphold the sincerity, always pay attention to the needs of customers. select excellent suppliers from the world, with a strong technical team, stable product quality and reliable supply reputation, serve customers.

PRODUCT PERFORMANCE

产品六大性能



隔音性能

采用三元乙丙密封胶条，耐老化
结合双重密封，关闭即静音



隔热性能

高密闭工艺结构，确保密封不渗漏
真正低能耗舒适室温体验



水密性能

加工精确度高、三道密封设计
确保滴水不漏



抗风压性能

高强度铝材，中空钢化玻璃
进口不锈钢配件，抗风压能力强



气密性能

高质量装配，优质密封材料
框包扇结构设计，阻止空气渗透



安全性能

不止于防盗
更从细节上呵护您的健康



PRODUCT CATALOGUE

产品目录

CASEMENT WINDOW SERIES

平开窗系列

68 系列高密度隔音防风防水平开窗 68 Series Low Permeability Wind And Water Proofing Hinged Window	13/16
55A 系列断桥隔热节能高密度平开窗 55A Series Insulated Energy Efficient High-Density Hinged Window	17/20
92 系列断桥隔热节能窗纱一体平开窗 92 Series Bridge Broken Window Screen Integrated Casement Window	21/24
110 系列断桥隔热节能窗纱一体平开窗 110 Series Bridge Broken Window Screen Integrated Casement Window	25/28
117 系列断桥隔热节能窗纱一体平开窗 110 Series Bridge Broken Window Screen Integrated Casement Window	29/32

SLIDING WINDOW SERIES

推拉窗系列

85 系列静音超高耐磨推拉门窗 85 Series Silent & Super High Wear- Resistant Sliding Door/Window	35/38
80 系列安全防水推拉门窗 80 Series Safety Waterproofing Swing Door/Window	39/42

SLIDING DOOR SERIES

推拉门系列

115 系列极窄轻奢推拉门 115 Series Extremely Narrow Light Luxury Sliding Door	45/48
105 系列高气密静音窄边推拉门 105 Series High Air Tight Silent Narrow Side Sliding Door	49/52
110 系列推拉门 110 Series Sliding Door	53/56

FOLDING DOOR SERIES

折叠门系列

73 系列静音耐磨豪华折叠门 73 Series Silence Wear-Resistant Luxury Bi-Fold Door	57/60
---	-------

PD PUSH AND PULL OPEN ONE DOOR SERIES

PD 推拉平开一体门系列	61/62
--------------	-------

W DOOR SERIES

W 门系列


W 系列卫生间门 W Series Toilet Door	65/72
----------------------------------	-------

WINTER GARDEN SERIES

阳光房系列

LE 欧式 4 代阳光房系列 Le European 4Th Generation Sunshine Room Series	73/74
---	-------





CASEMENT WINDOW SERIES

平开窗系列

门窗设计从“美观、舒适”二维，推向了全方位多维度，真实实现了美与舒适、健康的和谐融合。


断桥铝合金平开窗的隔音效果好，能达到降低 60% 的噪音，且结构精心设计，接缝严密，保证室内宁静；采用隔热型材内外框隔离，关闭严密，气密性和保温性能好；利用压力平衡原理设计，下滑设计斜面阶梯式，设有排水口，排水畅通，不容易渗水。

Doors and Windows design from "beautiful, comfortable" two-dimensional, to all-round multi-dimensional, truly achieve the harmonious integration of beauty, comfort, health.

The sound insulation effect of the broken bridge aluminum alloy flat window is good, which can reduce the noise by 60%. The structure is well designed and the joints are tight to ensure the indoor quiet. Using heat insulation profiles inside and outside frame isolation, close tight, air tightness and good heat preservation performance; Using the principle of pressure balance design, sliding design inclined plane step type, with drainage outlet, drainage is smooth, not easy to seepage.

68 SERIES LOW PERMEABILITY WIND AND WATER
PROOFING HINGED WINDOW

68 系列高密度隔音防风防水平开窗

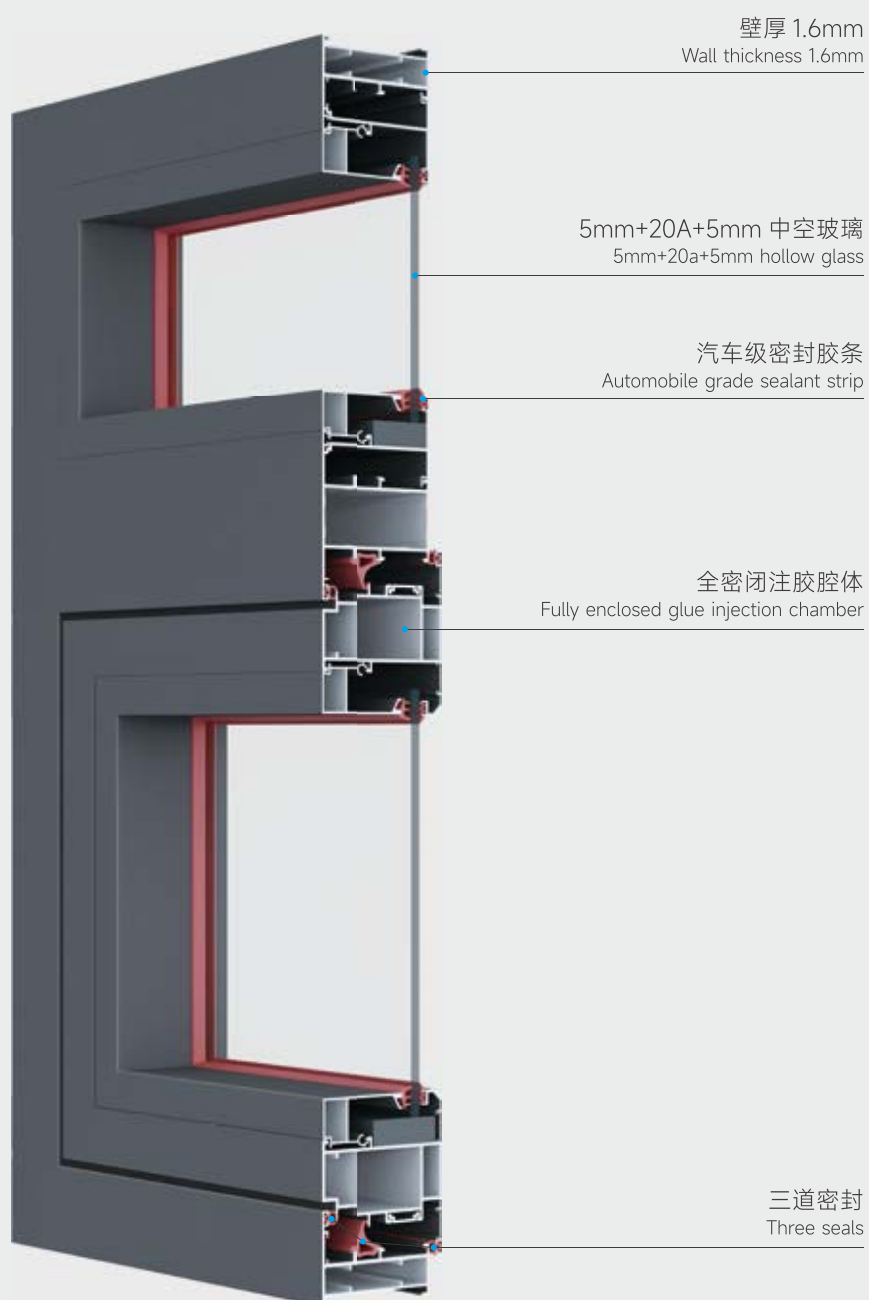

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 产品外观采用欧式独特的设计，室内扇压线与固定玻璃压线，玻璃从室内安装更换方便、安全，高层安全安装；

② 产品突显高效隔音，可配置中空安全玻璃，达到最佳的隔音效果，中空玻璃可内置韩国智能电动百叶；

③ 欧洲先进技术，三道 DPEM 密封胶条，气密性能达 0.02，水密性能达 450Pa 以上；

④ 整窗配置国际品牌五金配件，开启方便轻松，经久耐用、安全可靠；

⑤ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① The product appearance adopts European unique design, indoor fan pressing line and fixed glass pressing line. The glass can be installed and replaced easily and safely from indoor, and the high-rise can be installed safely;

② The product highlights high-efficiency sound insulation, and can be equipped with hollow safety glass to achieve the best sound insulation effect. The hollow glass can be built with Korean intelligent electric shutter;

③ European advanced technology, three layers of DPEM sealant strips, with air tightness of 0.02 and water tightness of more than 450pa;

④ The whole window is equipped with international brand hardware accessories, which is easy to open, durable, safe and reliable;

⑤ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.






好的设计，是审美、思想、文化以及生活方式的融合，是将理想中的向往和现实中的舒心两相结合，兼顾美学与功能，让人能在具有艺术美感的空间中，体验到生活的真实乐趣。

Good design is the integration of aesthetics, thought, culture and life style. It combines the ideal yearning with the reality of comfort, and gives consideration to both aesthetics and functions, so that people can experience the real pleasure of life in the space with artistic beauty.

55A SERIES INSULATED ENERGY EFFICIENT HIGH-DENSITY HINGED WINDOW

55A 系列断桥隔热节能高密度平开窗

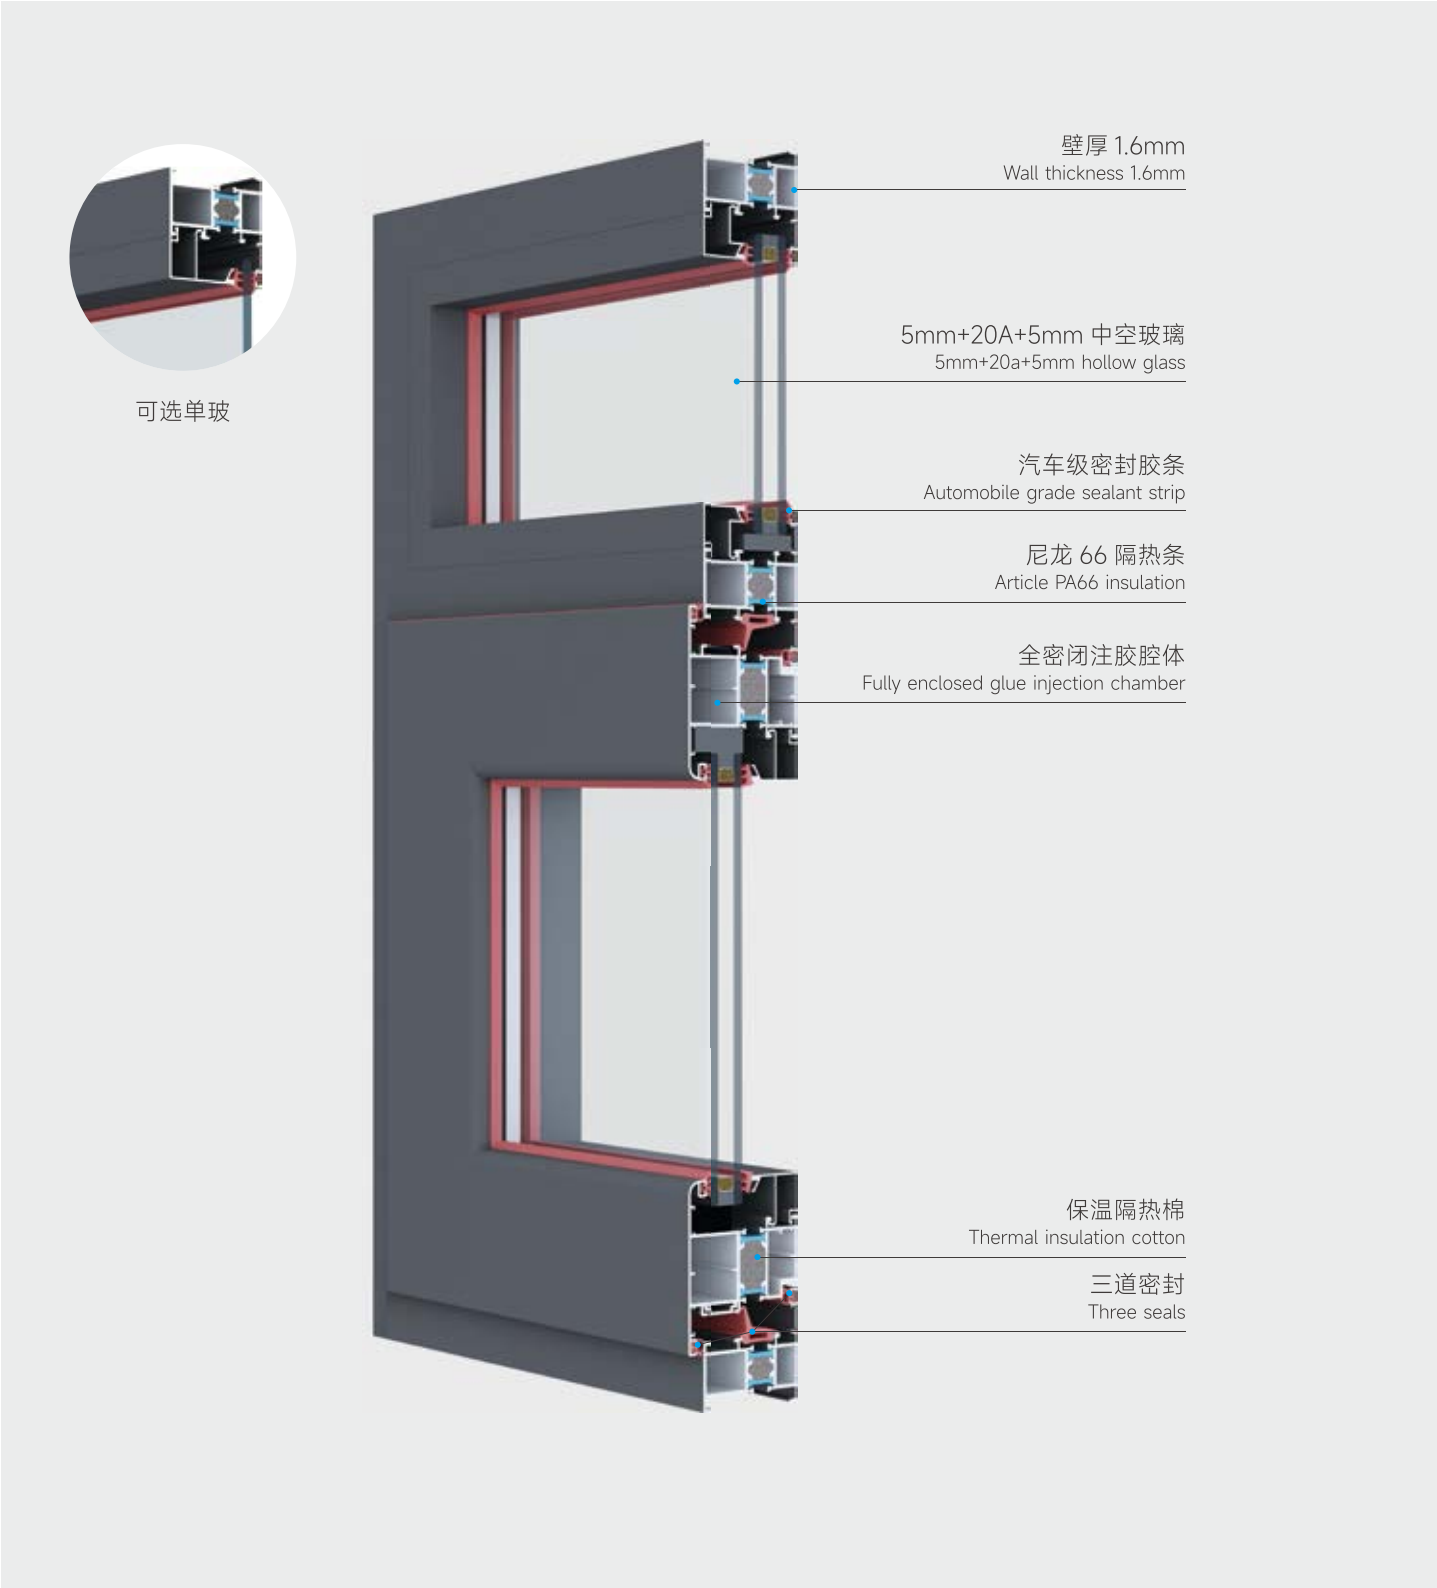

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 产品外观采用欧式独特的设计，室内扇压线与固定玻璃压线，玻璃从室内安装更换方便、安全，高层安全安装；

② 产品突显高效隔音，可配置中空安全玻璃，达到最佳的隔音效果，中空玻璃可内置韩国智能电动百叶；

③ 欧洲先进技术，三道 DPEM 密封胶条，气密性能达 0.02，水密性能达 450Pa 以上；

④ 整窗配置国际品牌五金配件，开启方便轻松，经久耐用、安全可靠；

⑤ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① The product appearance adopts European unique design, indoor fan pressing line and fixed glass pressing line. The glass can be installed and replaced easily and safely from indoor, and the high-rise can be installed safely;

② The product highlights high-efficiency sound insulation, and can be equipped with hollow safety glass to achieve the best sound insulation effect. The hollow glass can be built with Korean intelligent electric shutter;

③ European advanced technology, three layers of DPEM sealant strips, with air tightness of 0.02 and water tightness of more than 450pa;

④ The whole window is equipped with international brand hardware accessories, which is easy to open, durable, safe and reliable;

⑤ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.




有这样一处地方
能赋予生活纯净的美，
有这样一处地方，
不仅有所谓的小资情调，
更是可以在此共度美好时光，
分享生活点滴，
享受优雅的浪漫情怀，
共同度过一段闲散的时光。

There is such a place
Can endow life with pure beauty,
There is a place,
There is not only the so-called xiaozi sentiment,
It's a place where we can spend time,
Share your life,
Enjoy the elegant romance,
Spend some idle time together.



92 SERIES BRIDGE BROKEN WINDOW SCREEN
INTEGRATED CASEMENT WINDOW

92 系列断桥隔热节能窗纱一体平开窗

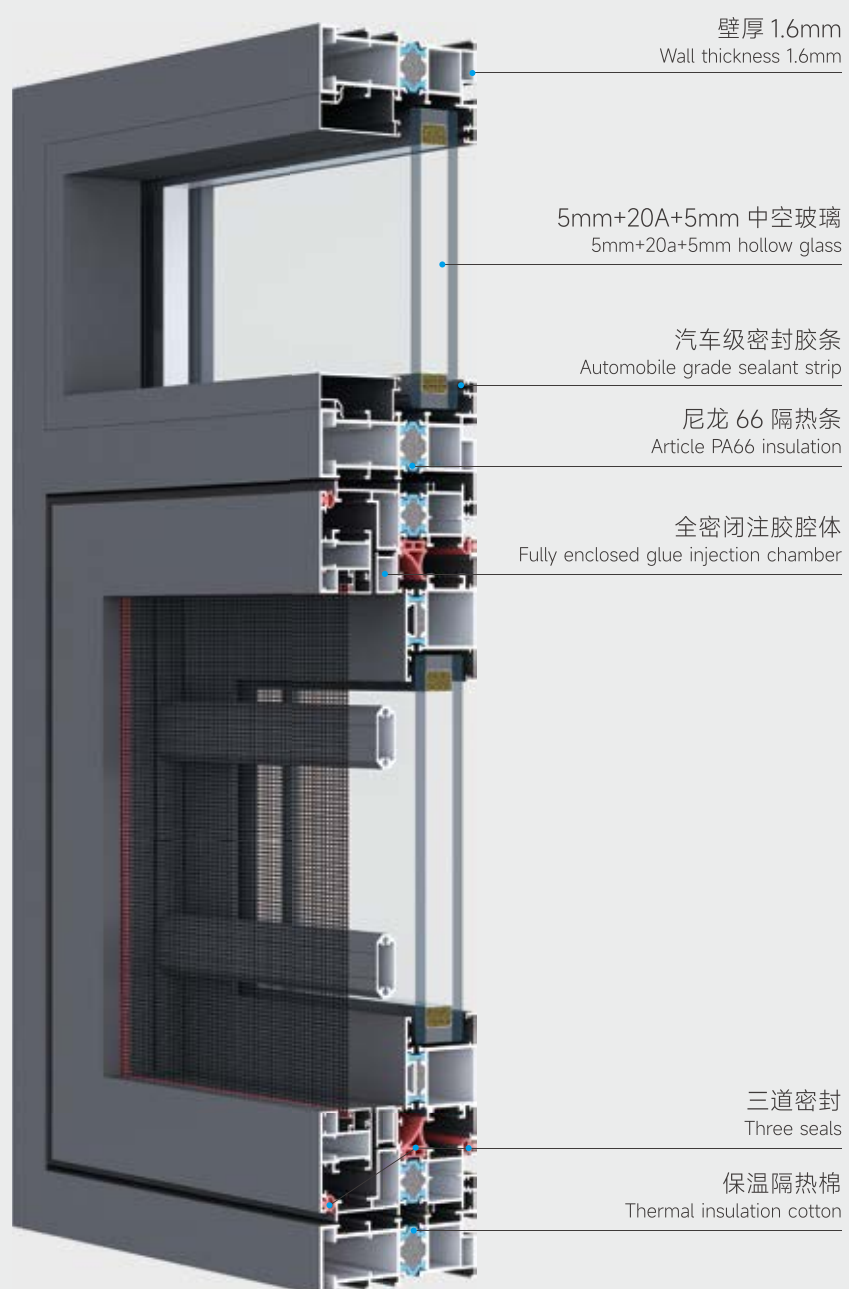

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m²·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W / (M² · K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.



简约的线条，雅致的色调，精巧的款式，
给人一种恰到好处的平衡感，
无时无刻不在向你传达空间的美好，


Contracted line, refined tone, delicate design,
it gives a just right sense of balance,
all the time is not to convey the beauty of space to you.





110 SERIES BRIDGE BROKEN WINDOW SCREEN
INTEGRATED CASEMENT WINDOW

110 系列断桥隔热节能窗纱一体平开窗

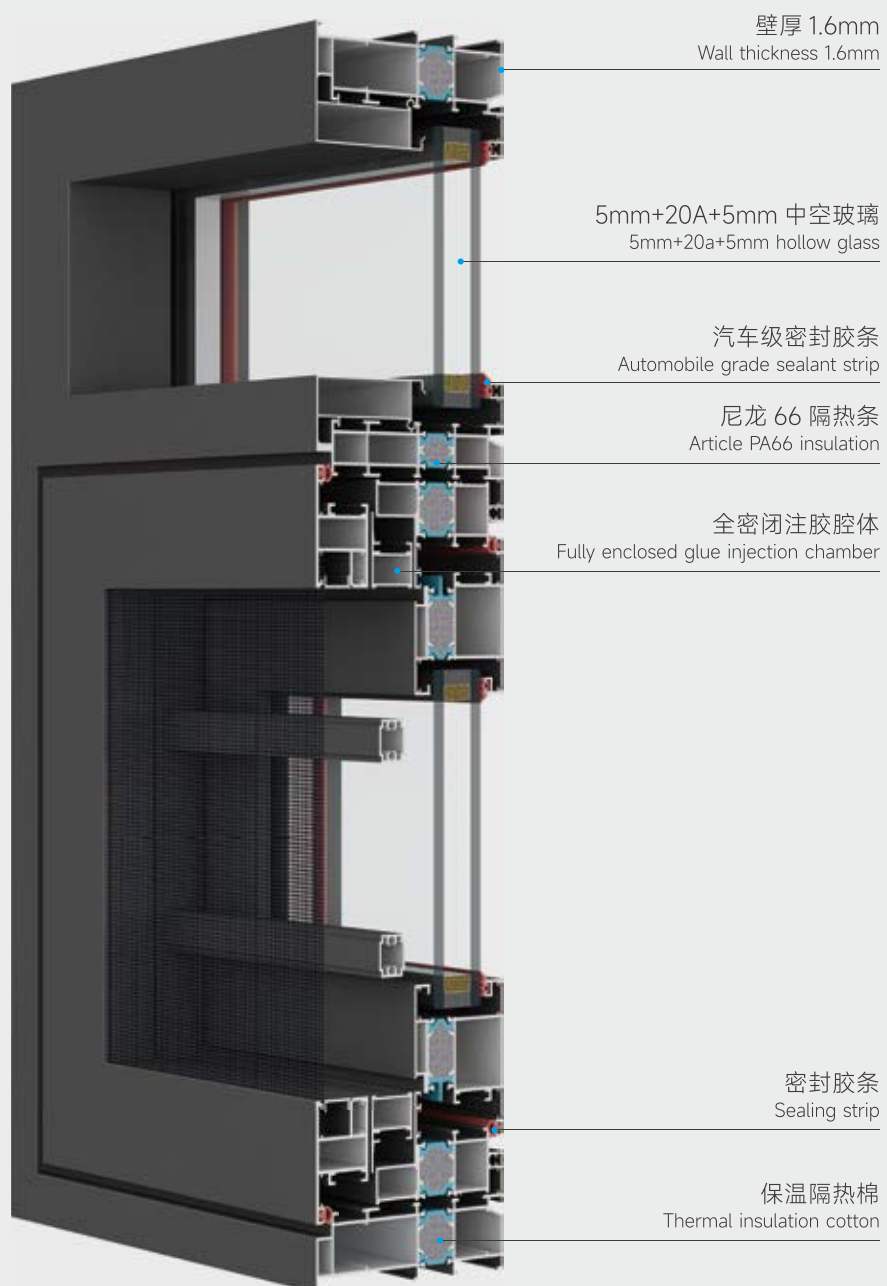

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W / (M2 · K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.






以现代意式极简为基调，
融合东方意蕴，
用简单的元素和自然材料，
创造让客户舒适、
愉悦和提升品质的空间。

Based on Modern Italian minimalism,
Integrating the Oriental connotation,
With simple elements and natural materials,
Create a comfortable environment for customers
Space for pleasure and quality improvement.

117 SERIES BRIDGE BROKEN WINDOW SCREEN
INTEGRATED CASEMENT WINDOW

117 系列断桥隔热节能窗纱一体平开窗

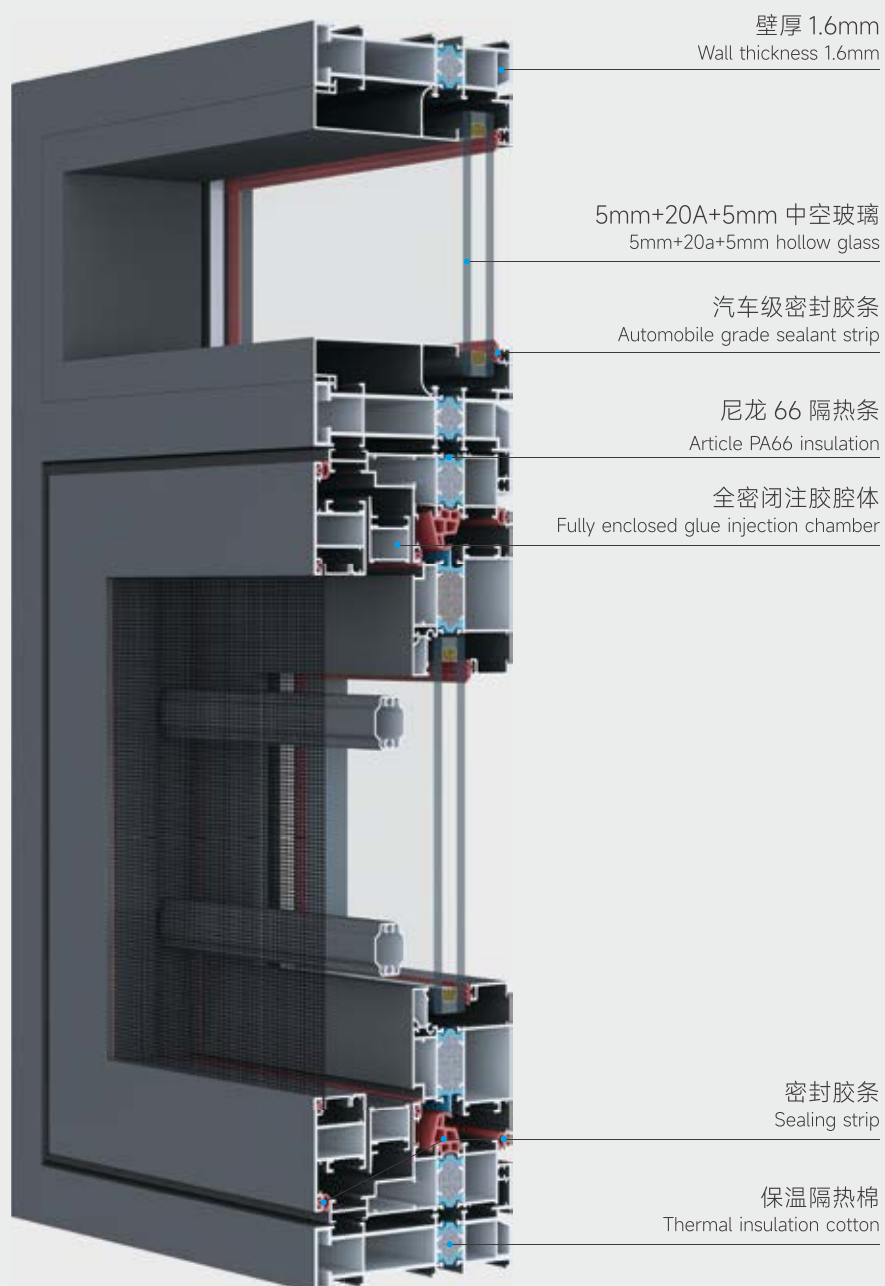

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m²·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W / (M² · K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;


⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.









SLIDING WINDOW SERIES

推拉窗系列

推拉窗采用装有滑轮的窗扇在窗框上的轨道滑行，这种窗的优点是窗无论在开关状态下均不占用额外的空间，构造也较为简单。推拉窗一般适宜中低层住户和比较需要通风的住户，因为开启方式为推拉方式，不会像平开窗那样窗户在外面，避免窗户发生高空坠物，采用高档滑轨，轻轻一推，开启灵活。推拉窗的窗扇幅度大，配上大块的玻璃，既增加室内的采光，又改善建筑物的整体形貌。窗扇的受力状态好、不易损坏。

Push pull window uses the sash that contains pulley to slide in the track on window frame, the advantage of this kind of window is the window no matter below switch state all does not take up additional space, the structure is relatively simple also. Push-pull window is appropriate commonly in low rise household and the household that needs ventilated more, because open means is push-pull means, won't resemble level open window in that way the window is outside, avoid the window to produce high altitude drop content, use high-grade slide course, push gently, open is flexible. The sash range of the push-pull window is large, with large pieces of glass, which increases indoor daylighting and improves the overall appearance of the building. Window sash of good stress state, not easy to damage.

LE-RELAX

85 SERIES SILENT & SUPER HIGH WEAR-RESISTANT
SLIDING DOOR/WINDOW

85 系列静音超高耐磨推拉门窗



性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.





LE-RELAX

80 SERIES SAFETY WATERPROOFING
SWING DOOR/WINDOW

80 系列安全防水推拉门窗



性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，节能环保 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.








推拉门将两个密切关联的区域有机融合，既保证一定的空间分隔，实现了空间的互动与融合。推拉门良好的分隔性与灵活性，装修采用推拉门可以让居室拥有开放、延伸、运动、机动的空间效果，适用于客厅、阳台、厨房、书房等，卫浴以及豪华卧室装修采用推拉门也可以达到意想不到的效果，给居室一个极具风情和想像力的空间印象。采用中空玻璃的推拉门还可以增加空间的通透性。

Sliding door a closely related area organic confluence, ensure certain spatial space already, realized the interaction of the space and confluence. Sliding door good separation and flexibility, decorate the sliding door can let a bedroom have open, extending, movement, the space effect of the motor, and is suitable for the sitting room, balcony, kitchen, study, such as sanitary ware and sliding door luxury bedroom decoration, also can achieve the result that expect is less than a amorous feelings and imagination to the bedroom space. The sliding door that uses hollow glass still can increase a space to be permeable sex.



SLIDING DOOR SERIES

推拉门系列

115 SERIES EXTREMELY NARROW LIGHT
LUXURY SLIDING DOOR

115 系列极窄轻奢推拉门



推拉门



吊趟门



三联动吊趟门

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.

LE-RELAX

大面积玻璃窗
带来强烈的视觉冲击力
无障碍的视觉感
挥去沉重的束缚
是灵魂自由的喜悦
明亮通透
负距离感
与空间无声的对话


Large area glazing
Bring a strong visual impact
Accessible visual sense
Waving away the heavy bondage
It is the joy of the freedom of the soul
Bright and
The negative sense of distance
Silent dialogue with space





105 SERIES HIGH AIR TIGHT SILENT NARROW
SIDE SLIDING DOOR

105 系列高气密静音窄边推拉门

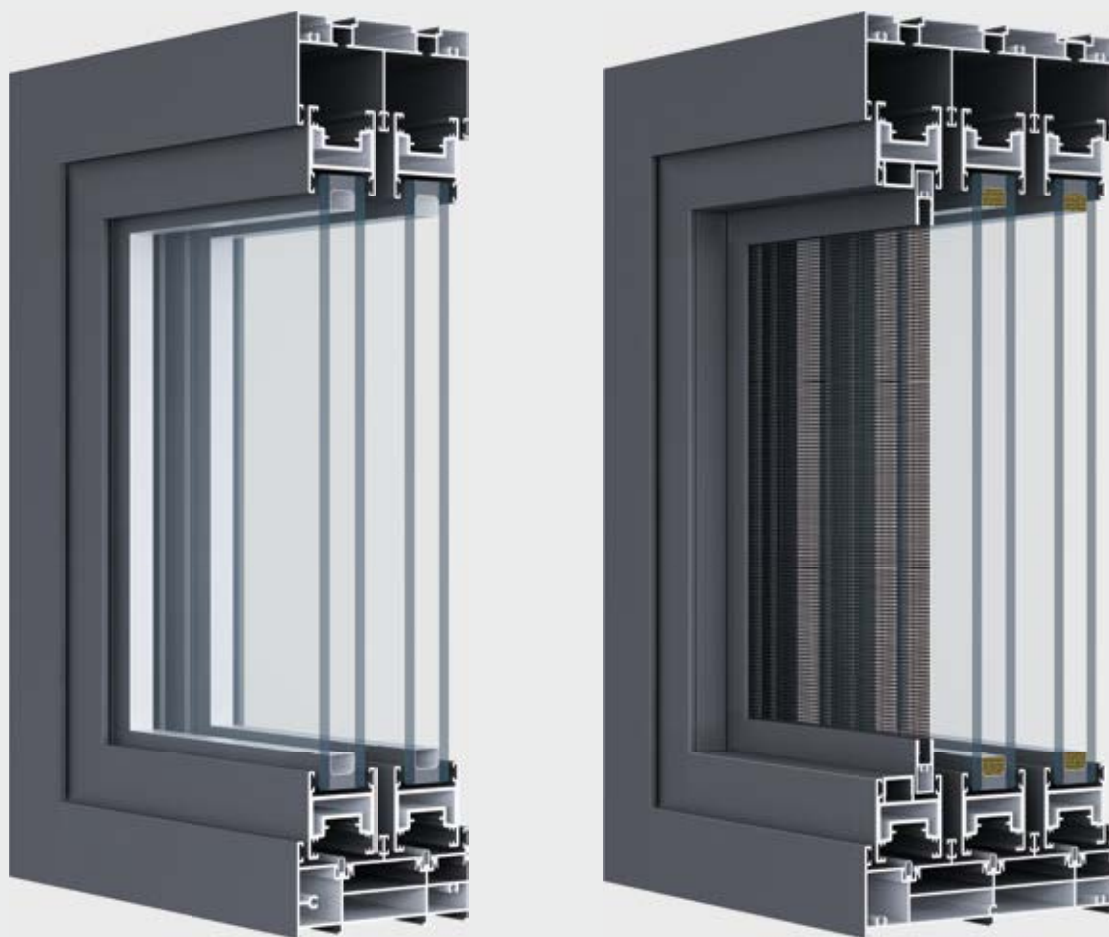

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.

LE-RELAX

越来越多的人
向往一种简单的生活态度，
窄边门窗设计
表现为边框窄，
造型简化，
全景视觉更好，
采光率更高，
让家居简洁明快。

More and more people
Yearning for a simple attitude towards life,
Narrow side door and window design
Represented by a narrow border,
Simplified modeling,
Panoramic vision is better,
Higher light rate,
Let household concise and lively.





LE-RELAX

110 SERIES
SLIDING DOOR

110 系列推拉门



性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.





在日趋繁忙的生活中
人们更倾向简约的生活环境
希望获得一种身心舒缓放松
以简洁和纯净来慰藉精神的空间
这是都市人对于家的定义

In an increasingly busy life
People prefer to live in a minimalist environment
Hope to obtain a kind of physical and mental relaxation
The space that will comfort spirit with concise and pure
This is the urbanite's definition of home

LE-RELAX

73 SERIES SILENCE WEAR-RESISTANT
LUXURY BI-FOLD DOOR

73 系列静音耐磨豪华折叠门



性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m2·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m2·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.





极简美学

不仅仅只是属于设计的一个主题

也是属于时尚和艺术的主题

色彩、材料的完美结合

以还原一个独特的基础美学

The minimalist aesthetics

It's not just a subject of design

Also belongs to the theme of fashion and art

The perfect combination of color and material

To restore a unique basic aesthetic





卫生间门的密封性好，可以有效防止风沙尘土或其它杂物进入屋内，卫生间门还比其它门的四周多一层胶质保护，在使用的时候，可以做到有效的隔绝。开启面积大，更加节省空间且开启及关闭时噪声小，可以不占用门洞左右两侧的墙面，使用周期长，而且密封、保温、防尘性能都比较好。双层中空玻璃设计，其结构非常紧凑，并且有非常好的气密性和水密性，铝合金卫生间门的使用进行隔音是有非常好的效果，有着非常强的抗风性，并且能够抗冲击性。




W DOOR SERIES


W 门系列

The toilet door has good sealing performance, which can effectively prevent wind, sand, dust or other sundries from entering the house. The toilet door is also protected by a layer of glue around other doors, which can be effectively isolated when in use. Large opening area, more space saving and low noise when opening and closing. It can not occupy the walls on the left and right sides of the door opening. It has a long service cycle and has good sealing, thermal insulation and dust-proof performance. The double-layer insulating glass design has a very compact structure and has very good air tightness and water tightness. The use of aluminum alloy toilet door for sound insulation has a very good effect, has very strong wind resistance and impact resistance.


W SERIES
TOILET DOOR
W 系列卫生间门

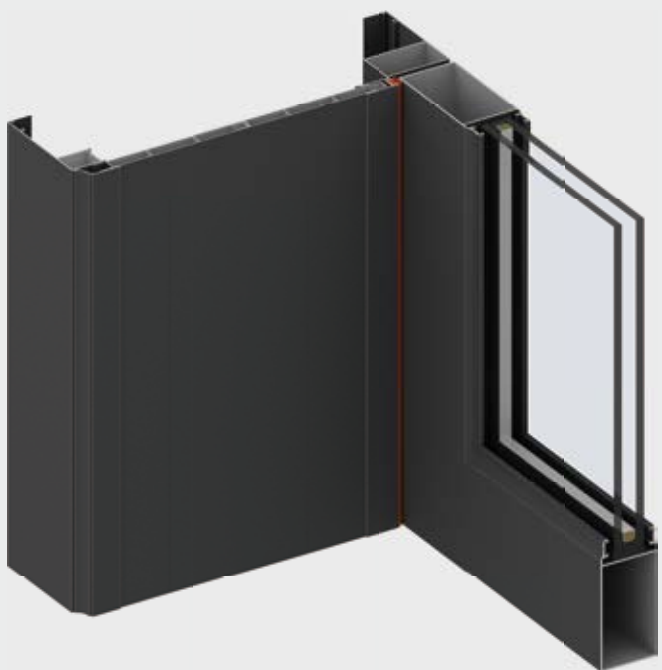

1.0 系列双包



1.0 系列外包



1.0 系列内包

性能参数 performance parameter

保温性能 Thermal insulation performance	6 级 Level 6	有效阻抗玻璃内外两侧温差的传导 Effective impedance Conductivity of temperature difference between inside and outside of glass
抗风压性能 Wind pressure resistance	8 级 Level 8	抵挡破坏力极强的台风 To ward off the most destructive typhoons
气密性能 Air tightness	7 级 Level 7	高度阻止内外空气渗透，环保节能 High prevent inside and outside air penetration, environmental protection and energy saving
水密性能 Water tightness	6 级 Level 6	风雨同时作用，严密防止雨水渗漏 Wind and rain at the same time, strictly prevent rain leakage
隔音性能 Sound insulation performance	4 级 Level 4	室内保持静音，降噪隔音 Keep indoor silence, noise reduction and sound insulation

产品概述 Product description

- ① 欧洲节能门窗系统，欧洲标准 C 槽口，五金配件可兼容性强；

② 多种厚度中空玻璃结构和隔热断桥铝型材空腔结构，可以降低噪音 30dB 以上；

③ 三道密封胶条结构，传热系数 K 值有效检测 2.7W/(m²·K) 以下；

④ 航空级三元乙丙橡胶密封条，抗老化、耐高低温、耐化学药品性能极佳，良好弹性和抗压缩变形性，长期使用不龟裂、变形；

⑤ 压线内装有防盗性能好（尤其楼层较低者），更换玻璃方便和安全（尤其楼层较高者或玻璃面积较大者）；

⑥ 适用于高档住宅、星级酒店、别墅、度假村和会所等。
- ① European energy-saving door and window system, European standard Cnotch, strong compatibility of hardware accessories;

② The hollow glass structure with various thickness and the cavity structure of thermal insulation broken bridge aluminum profile can reduce the noise by more than 30dB;

③ Three layers of sealant strip structure, and the heat transfer coefficient K value is effectively detected below 2.7W/(m²·K);

④ Aviation grade three ethylene propylene rubber sealing strip, anti-aging, high and low temperature, chemical resistance excellent performance, good elasticity and anti compression deformation, long-term use no crack, deformation;

⑤ The pressing line is equipped with good anti-theft performance (especially for those with lower floors), which is convenient and safe to replace the glass (especially for those with higher floors or larger glass area);

⑥ It is applicable to high-end residential buildings, star hotels, villas, resorts and clubs.

LE-RELAX

极简主义是一种风格

是一种简化布局简化色彩、简化线条、简化元素的风格

从视觉的角度看，这种设计是平淡的

Minimalism is a style

It's a style that simplifies the layout, simplifies the colors

simplifies the lines, simplifies the elements

From a visual point of view, the design is bland







LE-RELAX

W SERIES
TOILET DOOR


W 系列卫生间门

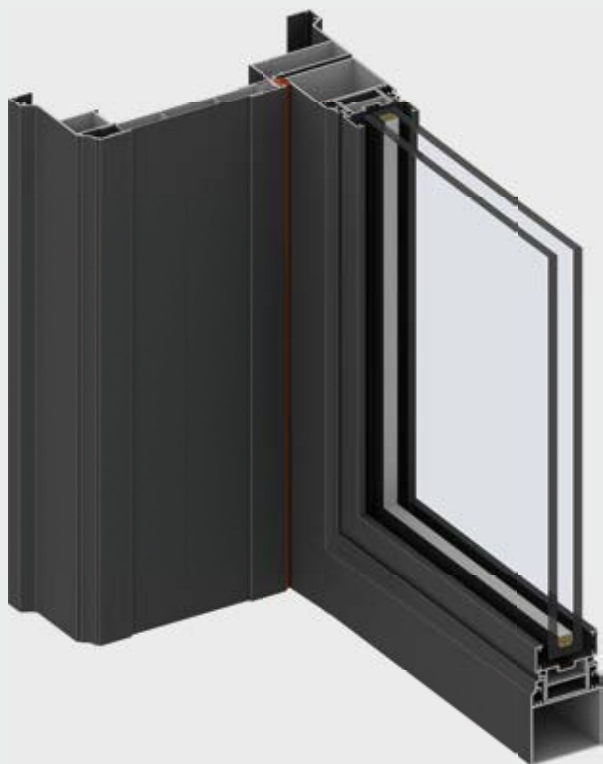

1.4 系列双包



1.4 系列内包



1.4 系列外包



LE EUROPEAN 4TH GENERATION SUNSHINE ROOM SERIES

LE 欧式 4 代阳光房系列

产品概述 Product description

- ① 采用高强度铝合金型材，结构层与饰面层分体组合方式。
- ② 提供钢化、夹胶、中空等各类特种玻璃屋面，造型新颖美观，构造安全。
- ③ 智能化电动天窗，自动控制天窗打开和关闭，调动室内空气流量防止雨淋湿。
- ④ 阳光房除了空间的延伸所带来的舒适度，还能够使您享受到：节能隔热、高效隔音、自然通风、有效排水、易于清洁和安全等多方面的功能。

- ① Adopt high strength aluminum alloy profile, structure layer and finish layer separate combination.
- ② Provide toughened, laminated, hollow and other kinds of special glass roofing, novel and beautiful shape, safe structure.
- ③ Intelligent electric skylight automatically controls the opening and closing of the skylight to mobilize indoor air flow and prevent rain.
- ④ In addition to the comfort brought by the extension of the space, the sun room can also make you enjoy: energy-saving heat insulation, efficient sound insulation, natural ventilation, effective drainage, easy to clean and safety and other functions.







公司地址：广东中山市港口镇迎富二路 86 号
全球统一免费服务热线：400-1788-636
网址：<http://www.bd-lerelax.com>