


SUSPENSION

DESCRIPTION

- The double-wishbone type independent suspension is used for the front as in the previous model.
- A double-wishbone type independent suspension, in which coil springs are located underneath, has been adopted for the rear.

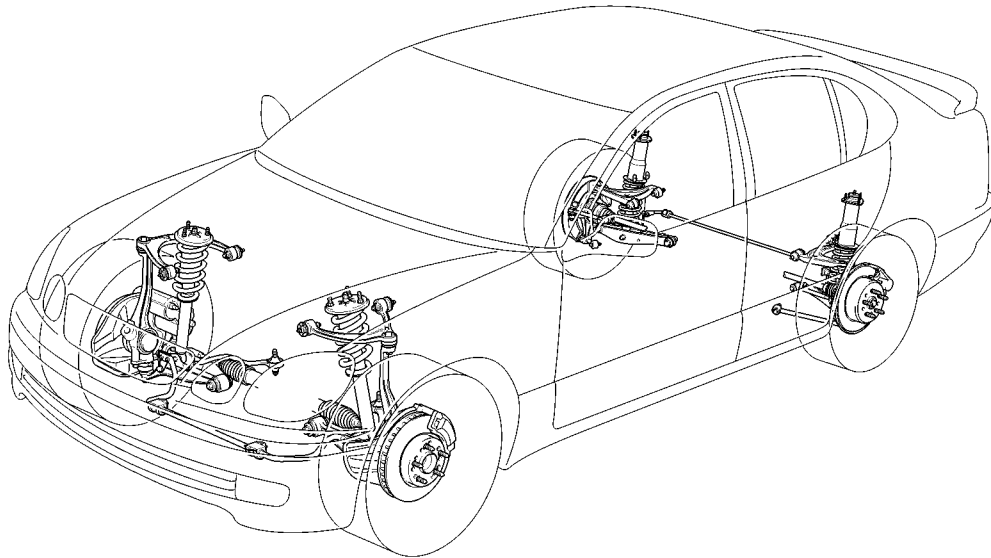

CH

150CH10

► Specifications ◀

Suspension Item		Front	Rear
Tread	mm (in.)	1535 (60.43)	1510 (59.45)
Caster*	degrees	7°28'	—
Camber*	degrees	−0°18'	−0°30'
Toe-In*	mm (in.)	1.5 (0.06)	0.5 (0.02)
King Pin Inclination*	degrees	8°54'	—

*: Unloaded Vehicle Condition