
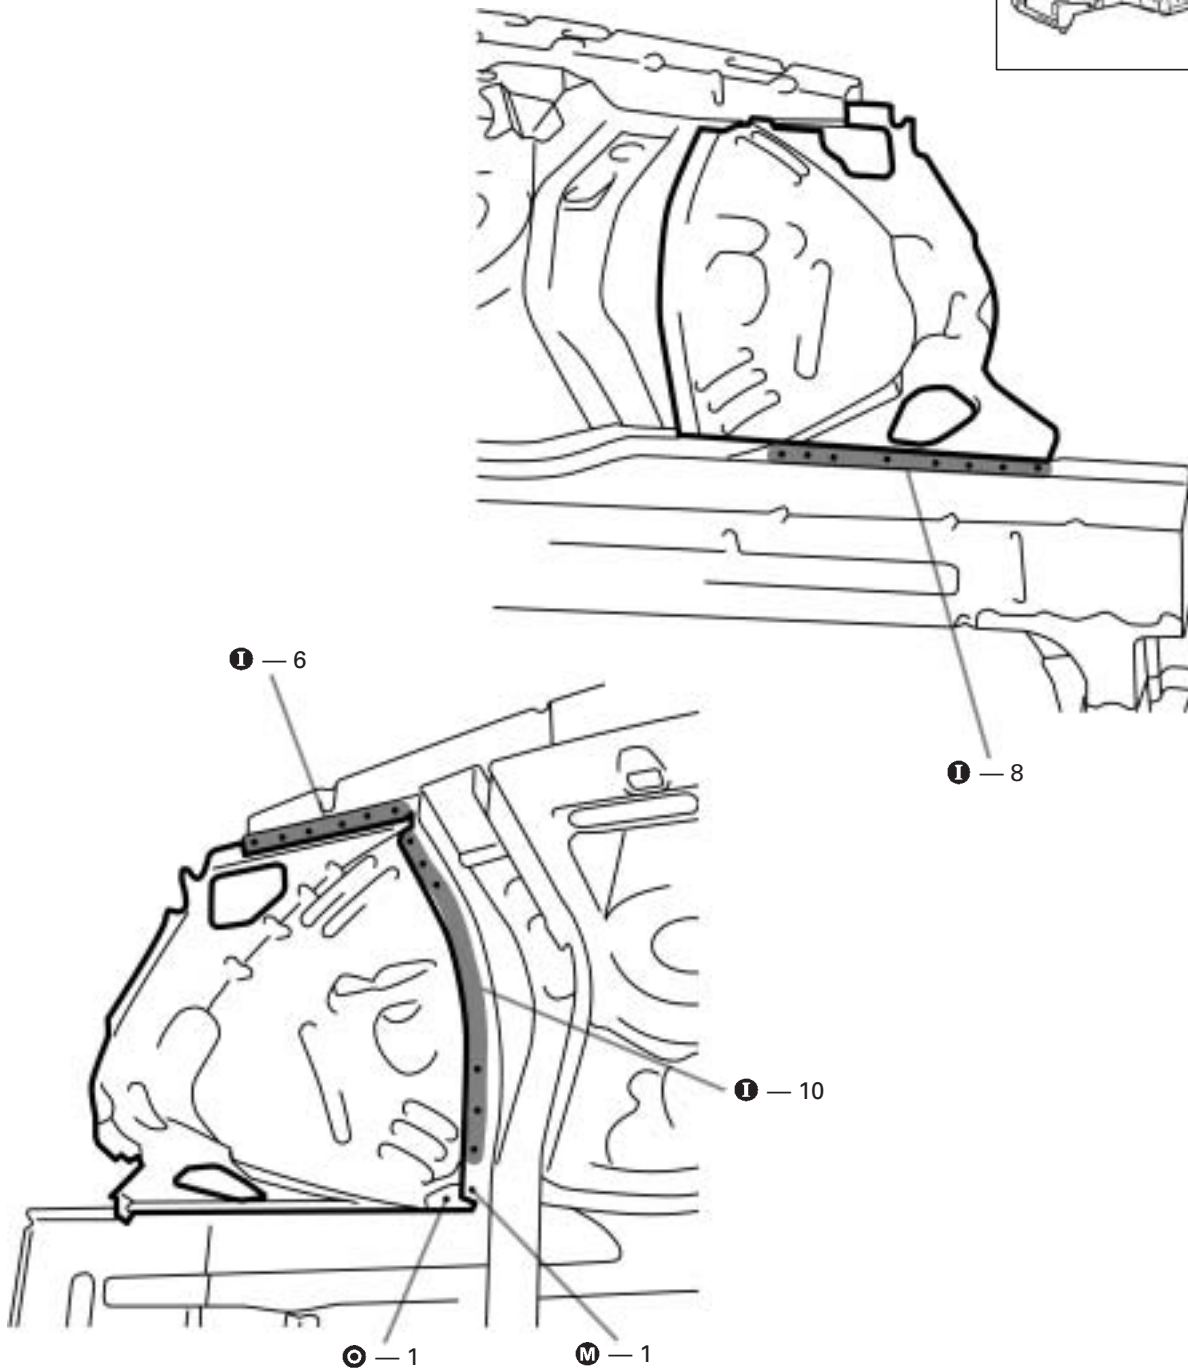
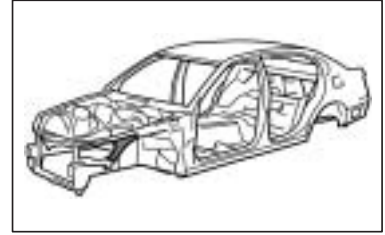


FRONT FENDER FRONT APRON (ASSY)**REMOVAL (With the radiator side support removed.)**

INSTALLATION

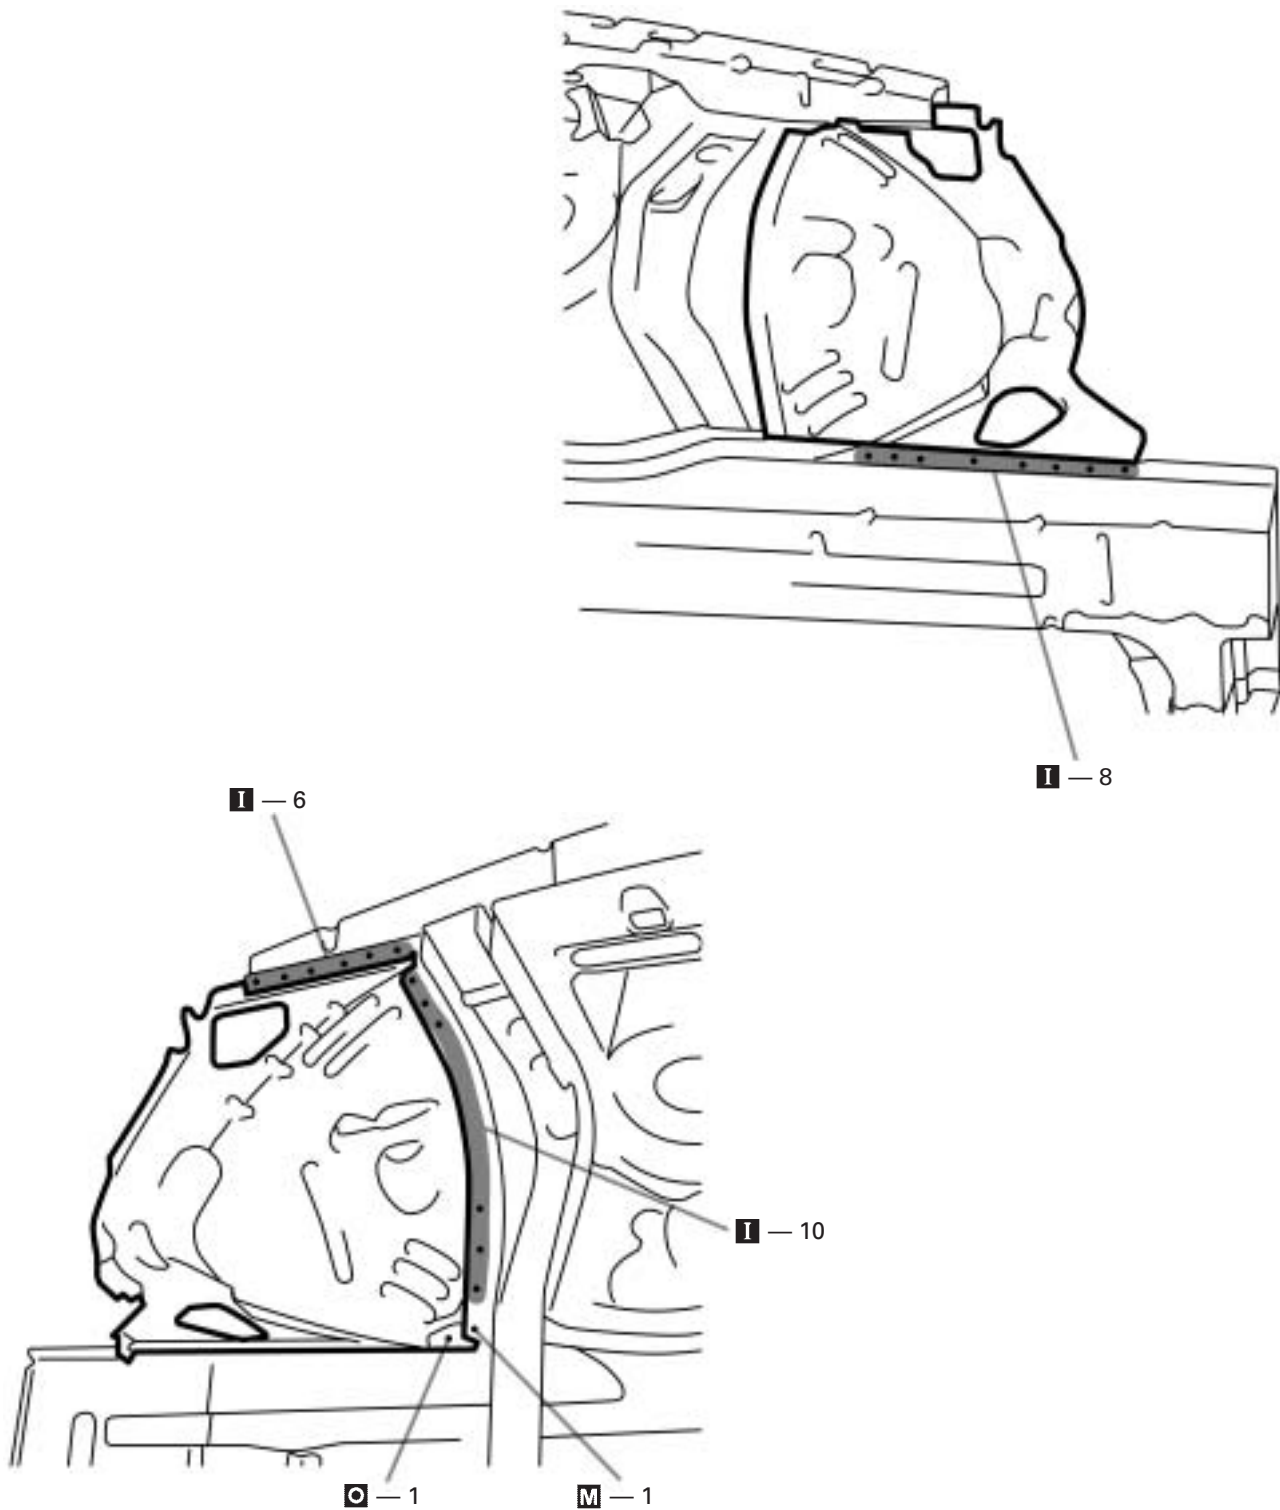

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.