
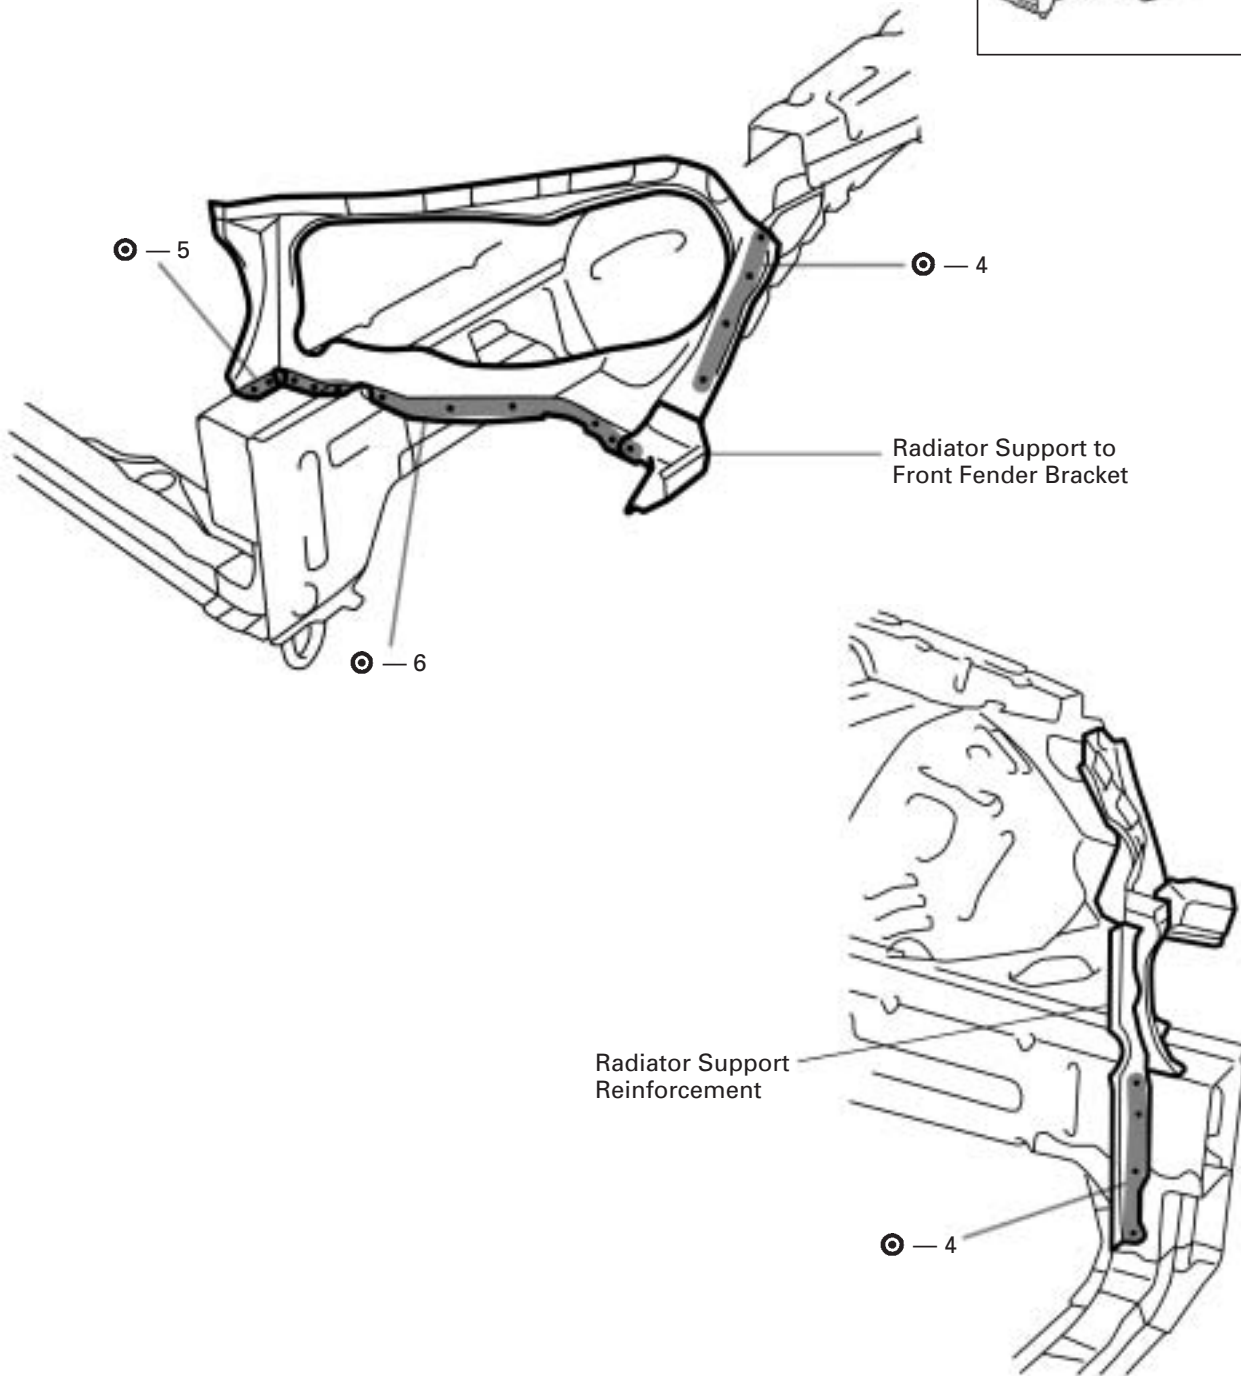



## RADIATOR SIDE SUPPORT (ASSY)

**REMOVAL (With the radiator upper support removed.)**

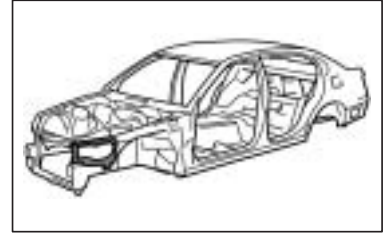

1. Replace the radiator support to front fender bracket and radiator support reinforcement at the same time.

## INSTALLATION

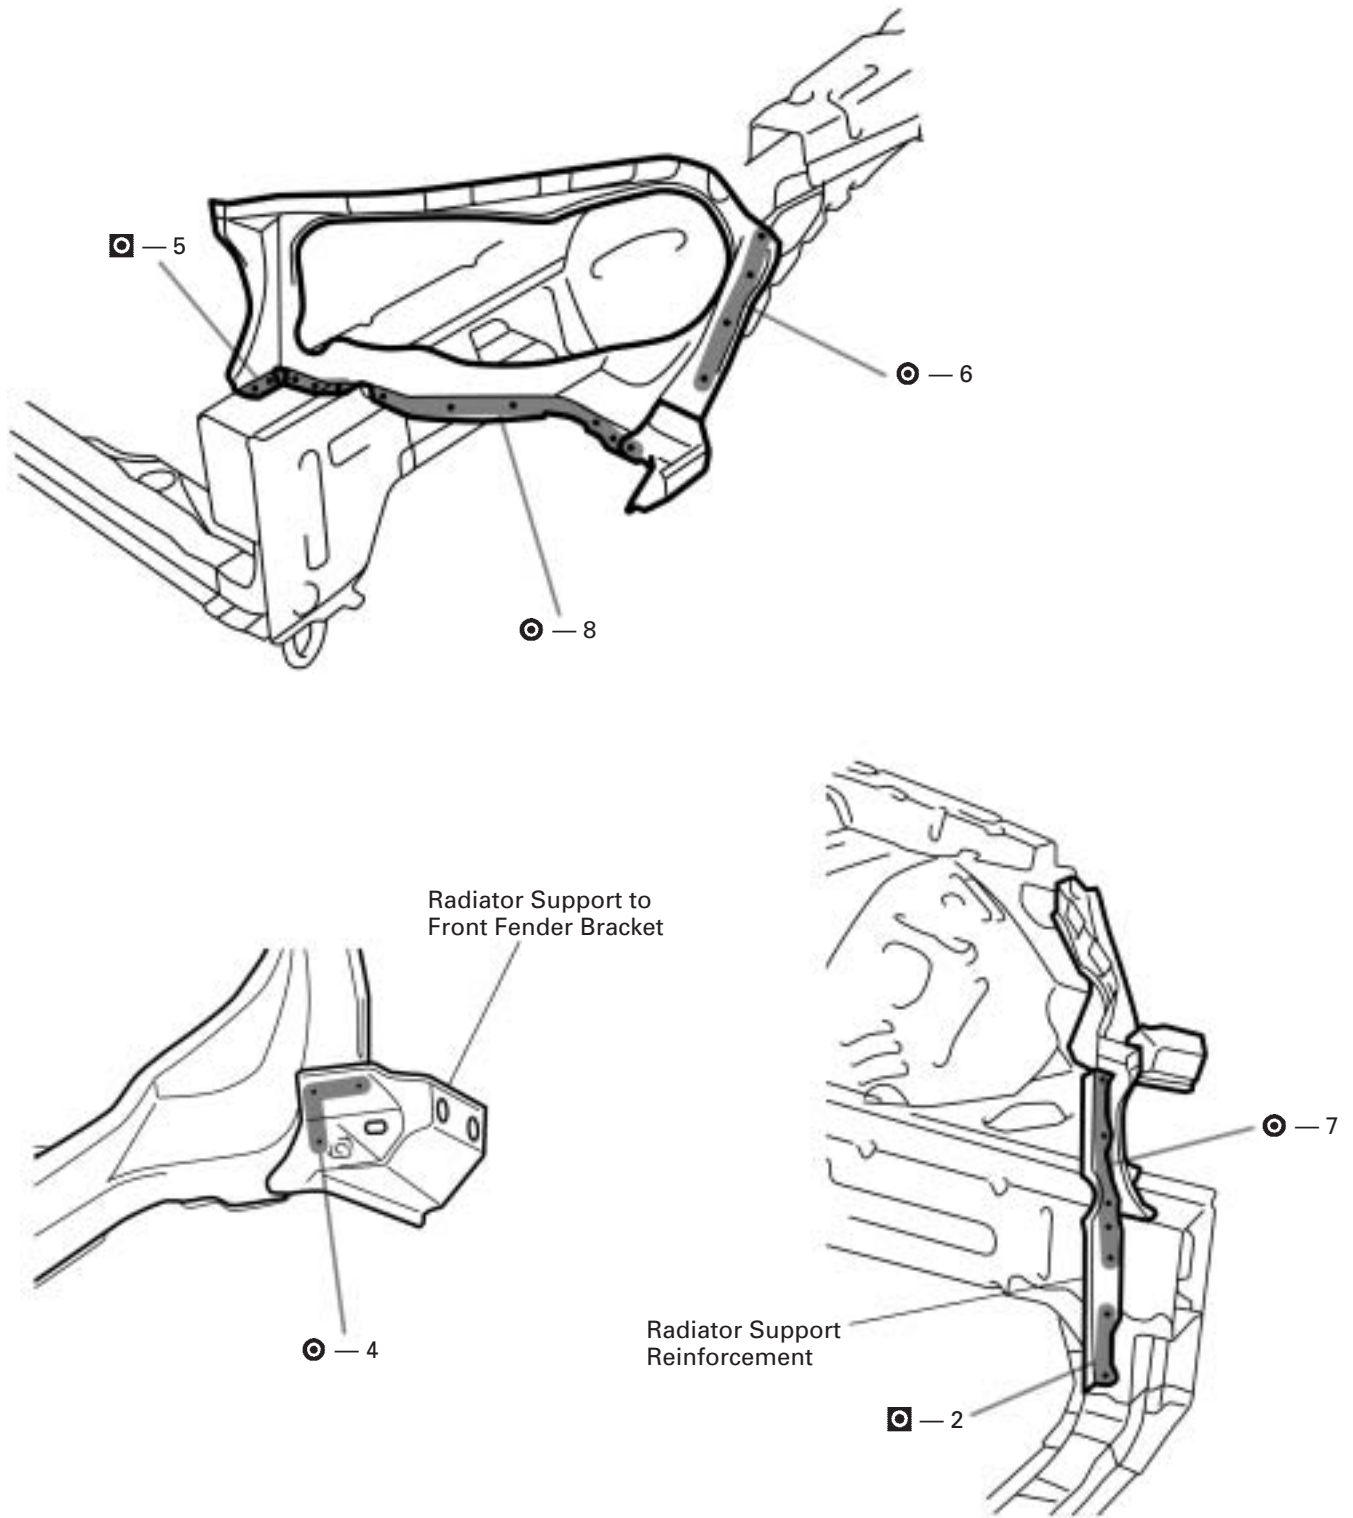

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

*HINT: First install the radiator upper support.*