

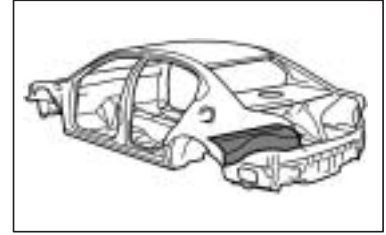
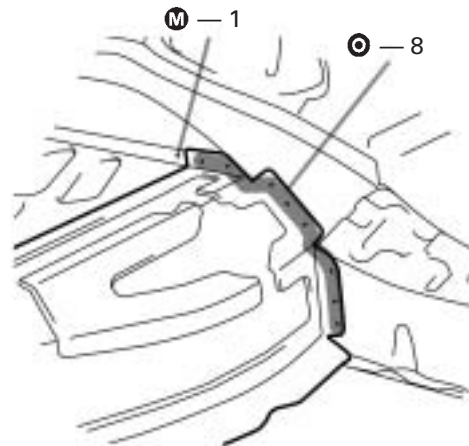


REAR FLOOR NO.1 CROSSMEMBER, REAR FLOOR NO.2 CROSSMEMBER (ASSY)

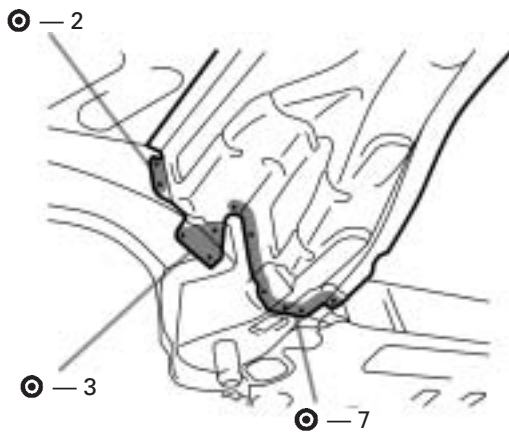


REMOVAL (With the rear floor pan removed.)

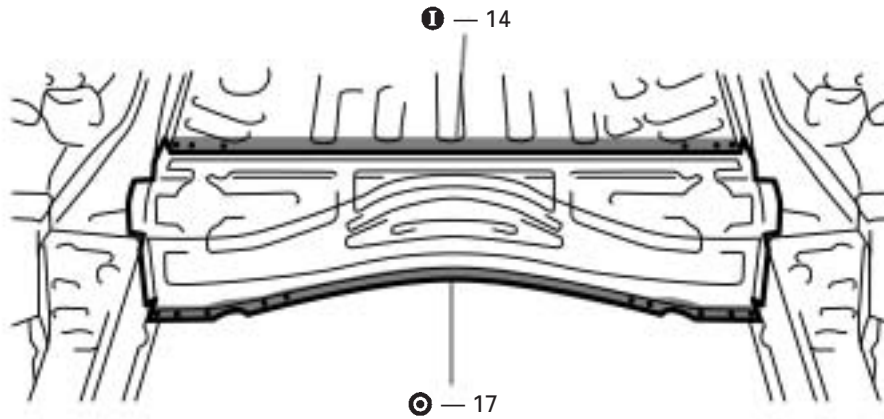

1. After removing the rear floor No.1 crossmember, remove the rear floor No.2 crossmember.

INSTALLATION

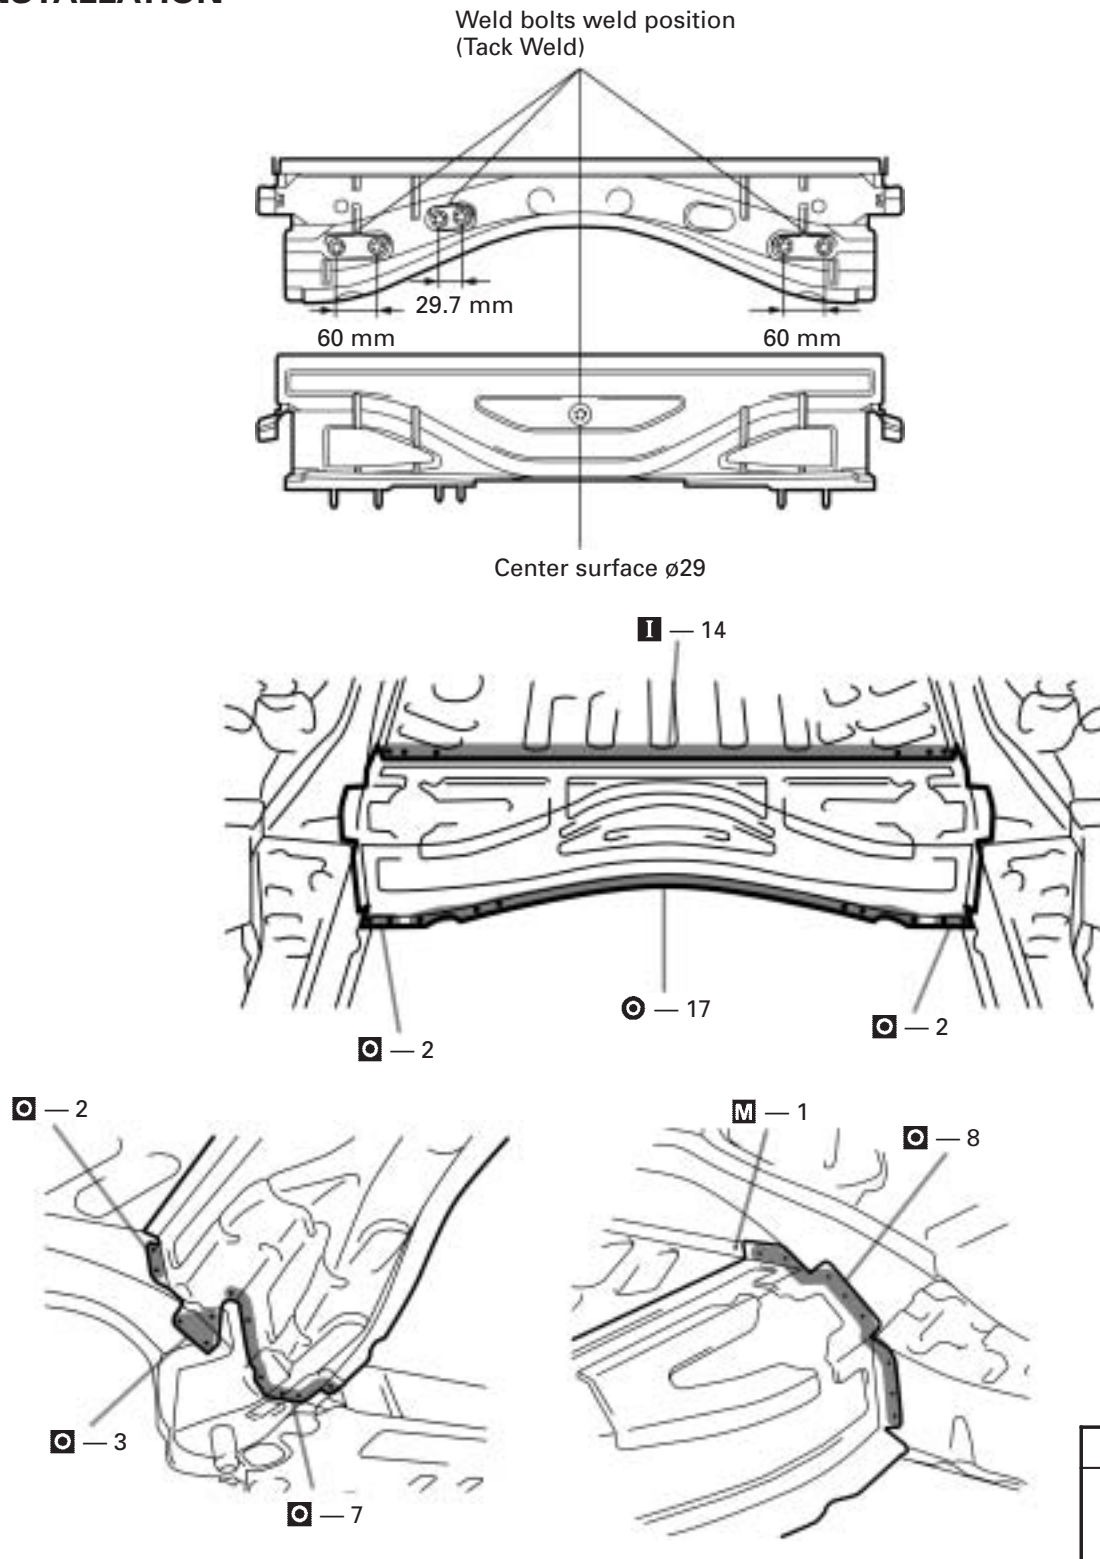

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.
2. Remove the weld of the weld bolts on the panel surface.