
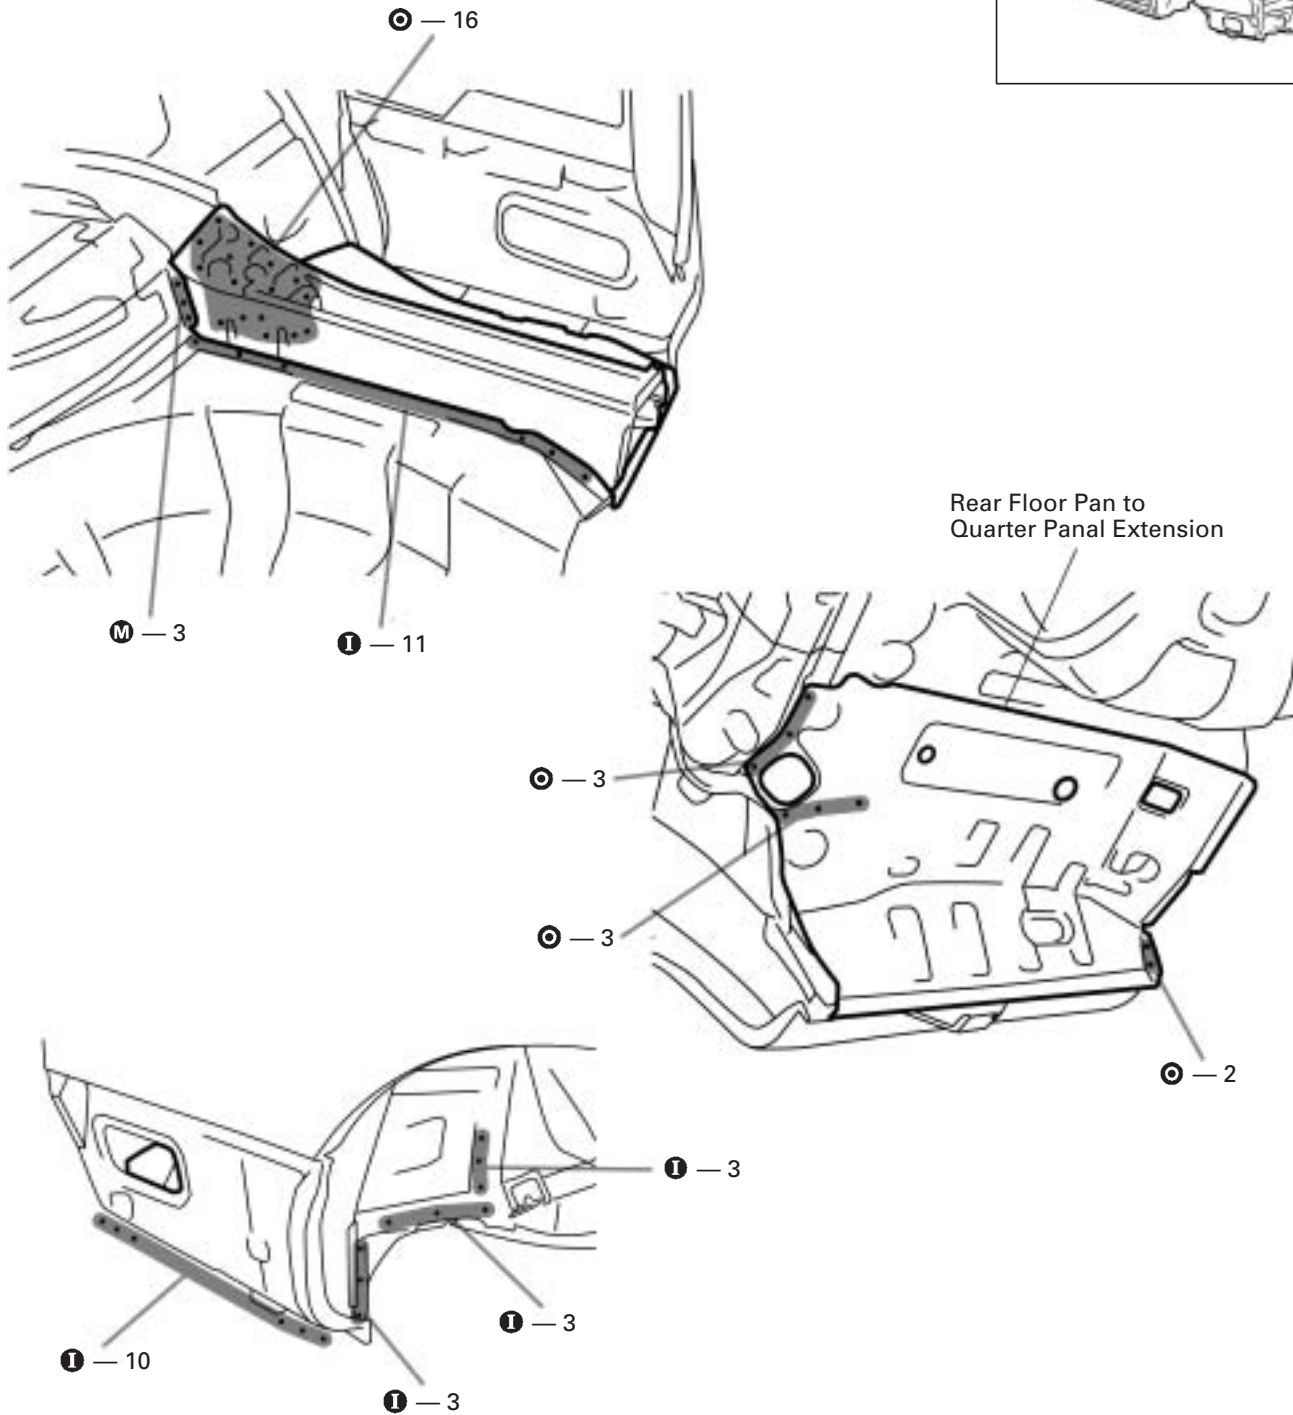



REAR FLOOR SIDE REAR MEMBER (ASSY)

REMOVAL (With the body lower back panel removed.)

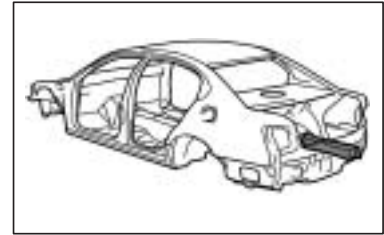

1. Replace the rear floor pan to quarter panel extension at the same time.

INSTALLATION

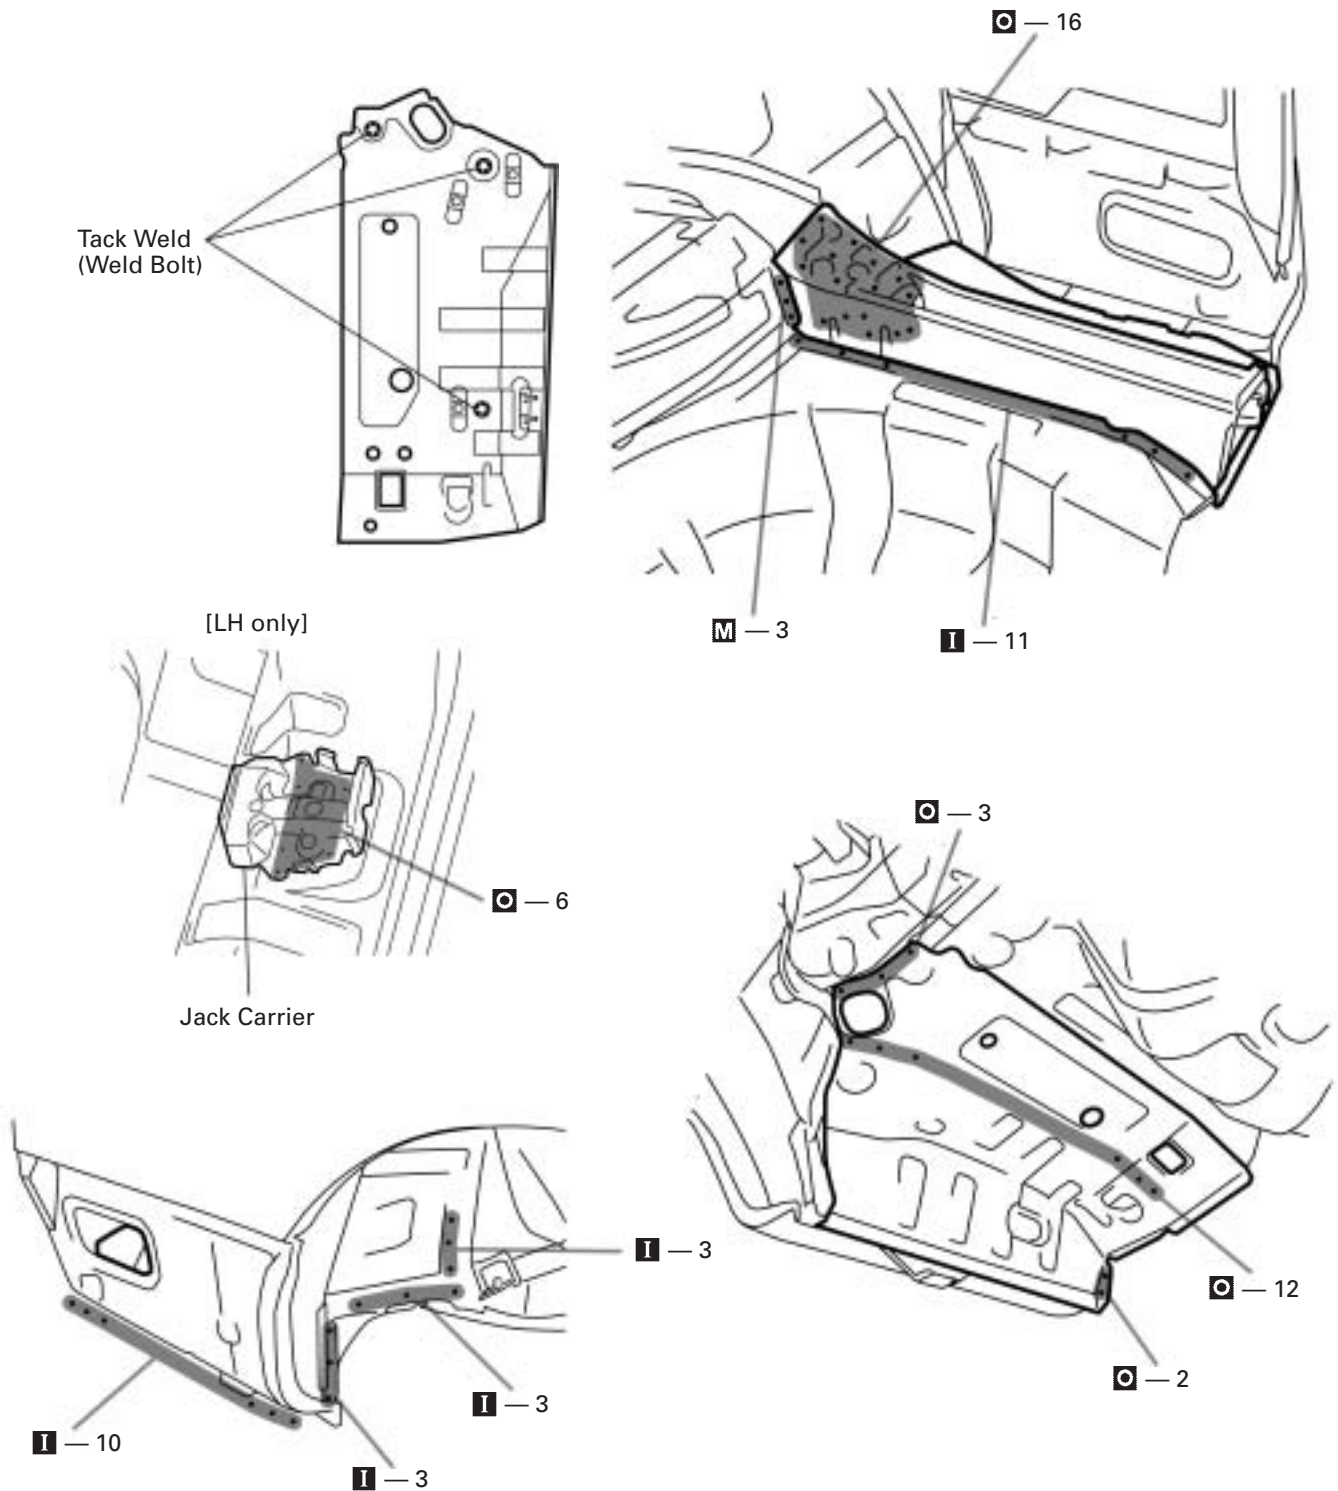

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.
2. After welding the rear floor side rear member, install the quarter panel extension.
3. Attach the weld bolt to the center of the bearing surface.