
DI2AI-02

Light control switch circuit

WIRING DIAGRAM

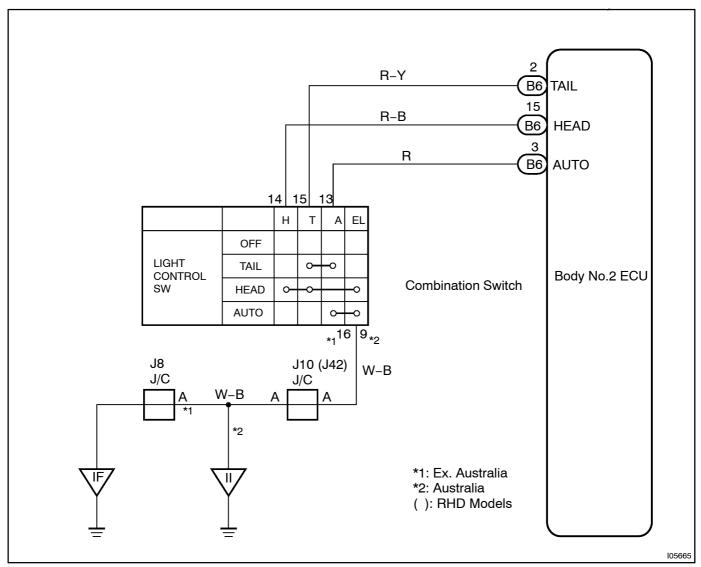

INSPECTION PROCEDURE

HINT:

Incase of using the LEXUS hand-held tester, start the inspection from step of and incase of the LEXUS hand-held tester, start from step 2.

1[]

Check[headlight[control[switch[using[LEXUS[hand-held[tester.

PREPARATION:

Connect[]he[]LEXUS[]hand-held[]ester[]o[]he[]DLC[3].

CHECK:

Check the theadlight control witch using DATA LIST.

OK:

Terminal (tester@lisplay) Switch@position	Headlight[switch (Tail)	Headlight[switch (Head)	Auto[jight[switch
OFF	OFF	OFF	OFF
TAIL	ON	OFF	OFF
HEAD	ON□	ON	OFF
AUTO	OFF	OFF[]	ON

OK[]

Proceed_to_next_circuit_inspection_shown_on problem_symptoms_table_(See_page_DI-660).

NG

2

Check[headlight[control[switch[See[page[BE-38]).

NG

Replace the headlight control switch.

OK

3 Check wireharness and connector between headlight control witch and body No.2 ECU.

NG

Repair or replace wireharness or connector.

OK

Proceed to hext circuit inspection shown on problem symptoms table. (See page DI-660)