

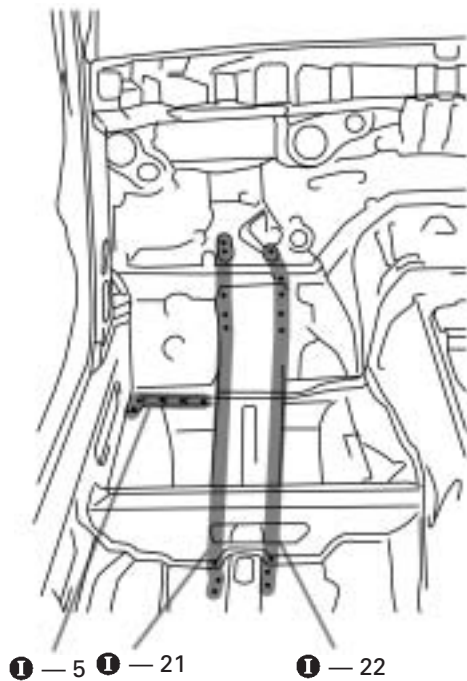
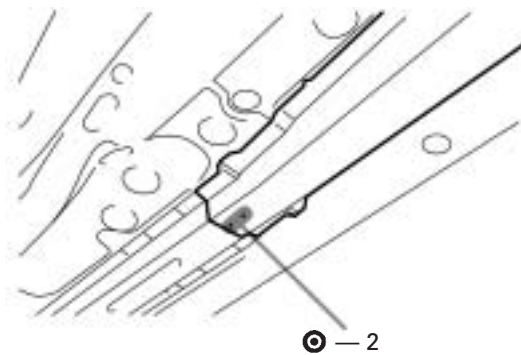
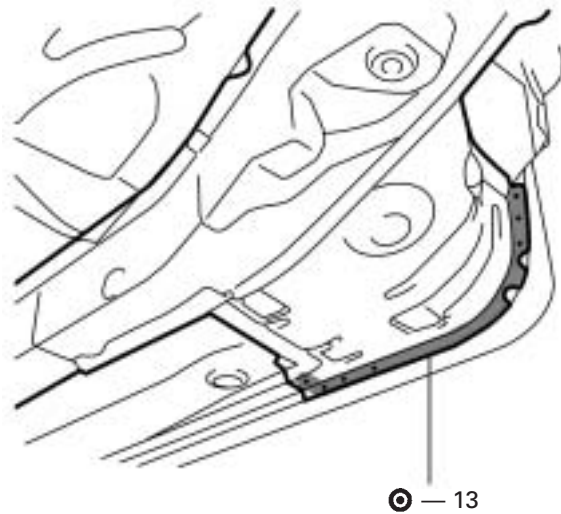
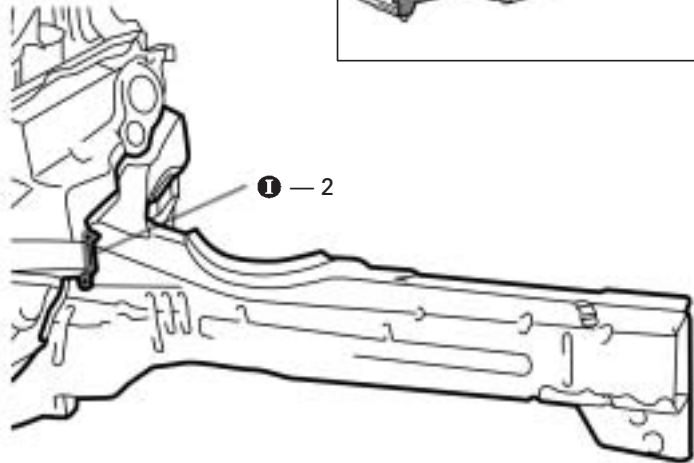
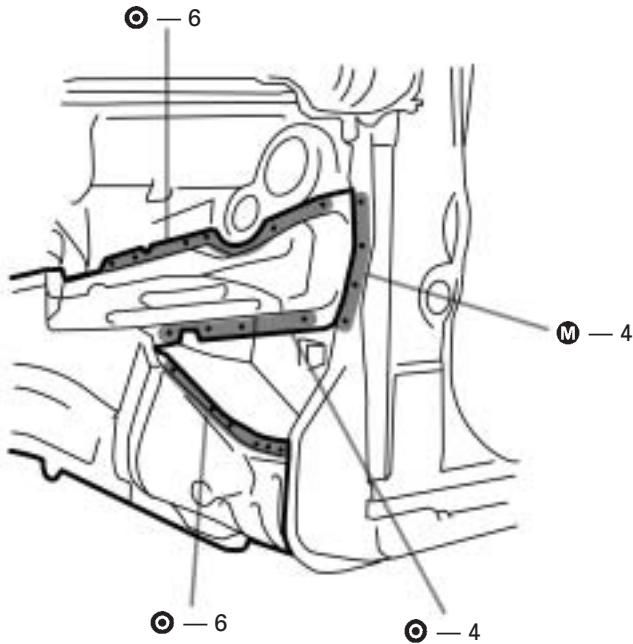


FRONT SIDE MEMBER (ASSY)

REMOVAL (With the front crossmember, front fender apron removed.)

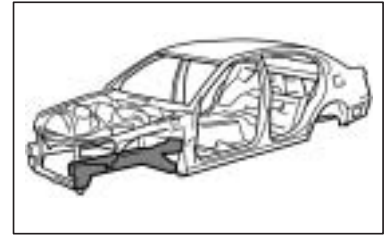

INSTALLATION

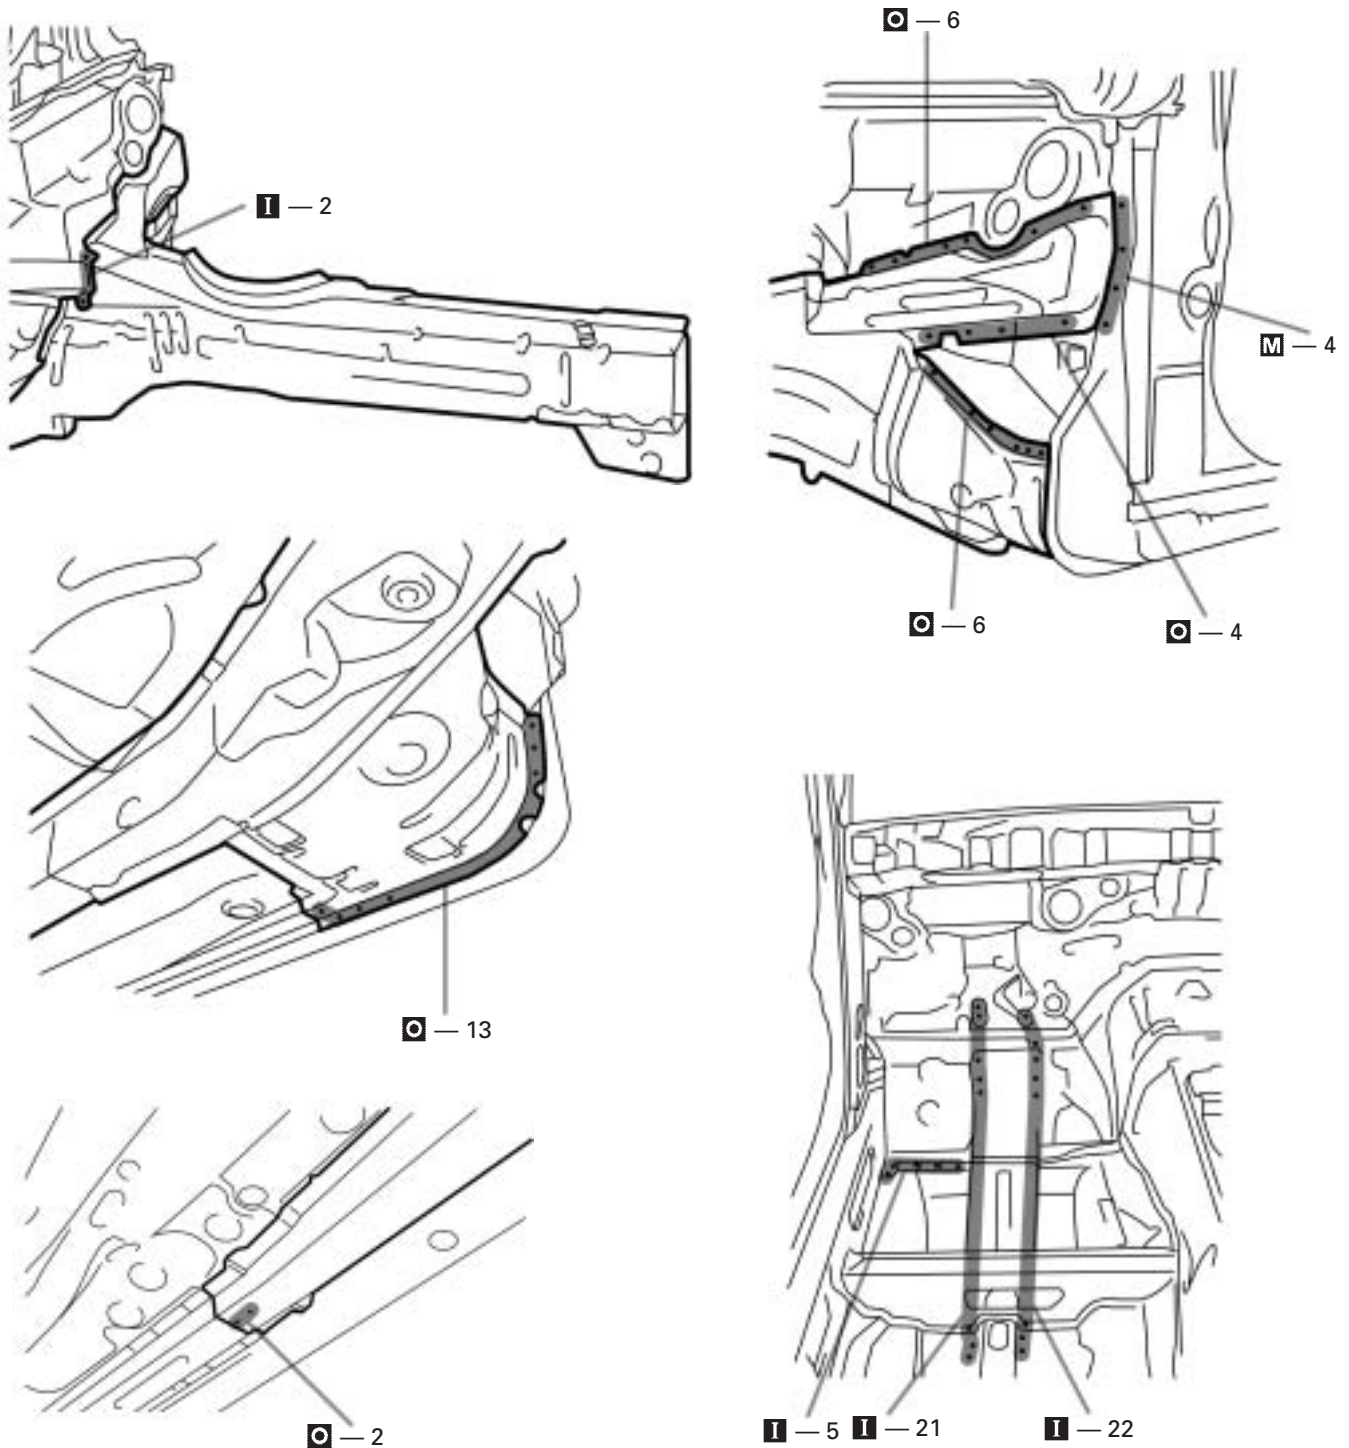

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

HINT: Make sure each measurement is correct, as this parts affects the front wheel alignment.