
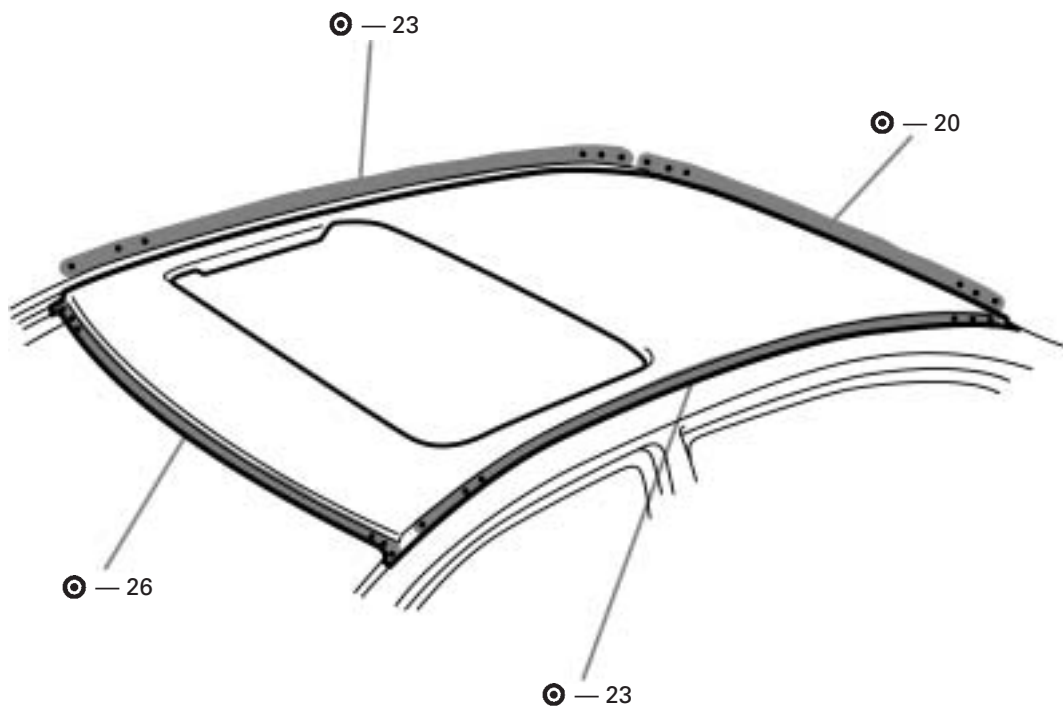
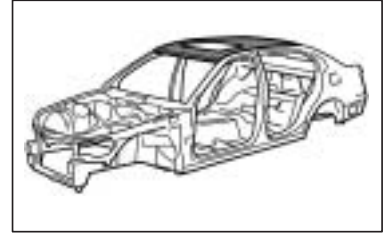


ROOF PANEL (ASSY): w/ Moon Roof**REMOVAL**

INSTALLATION

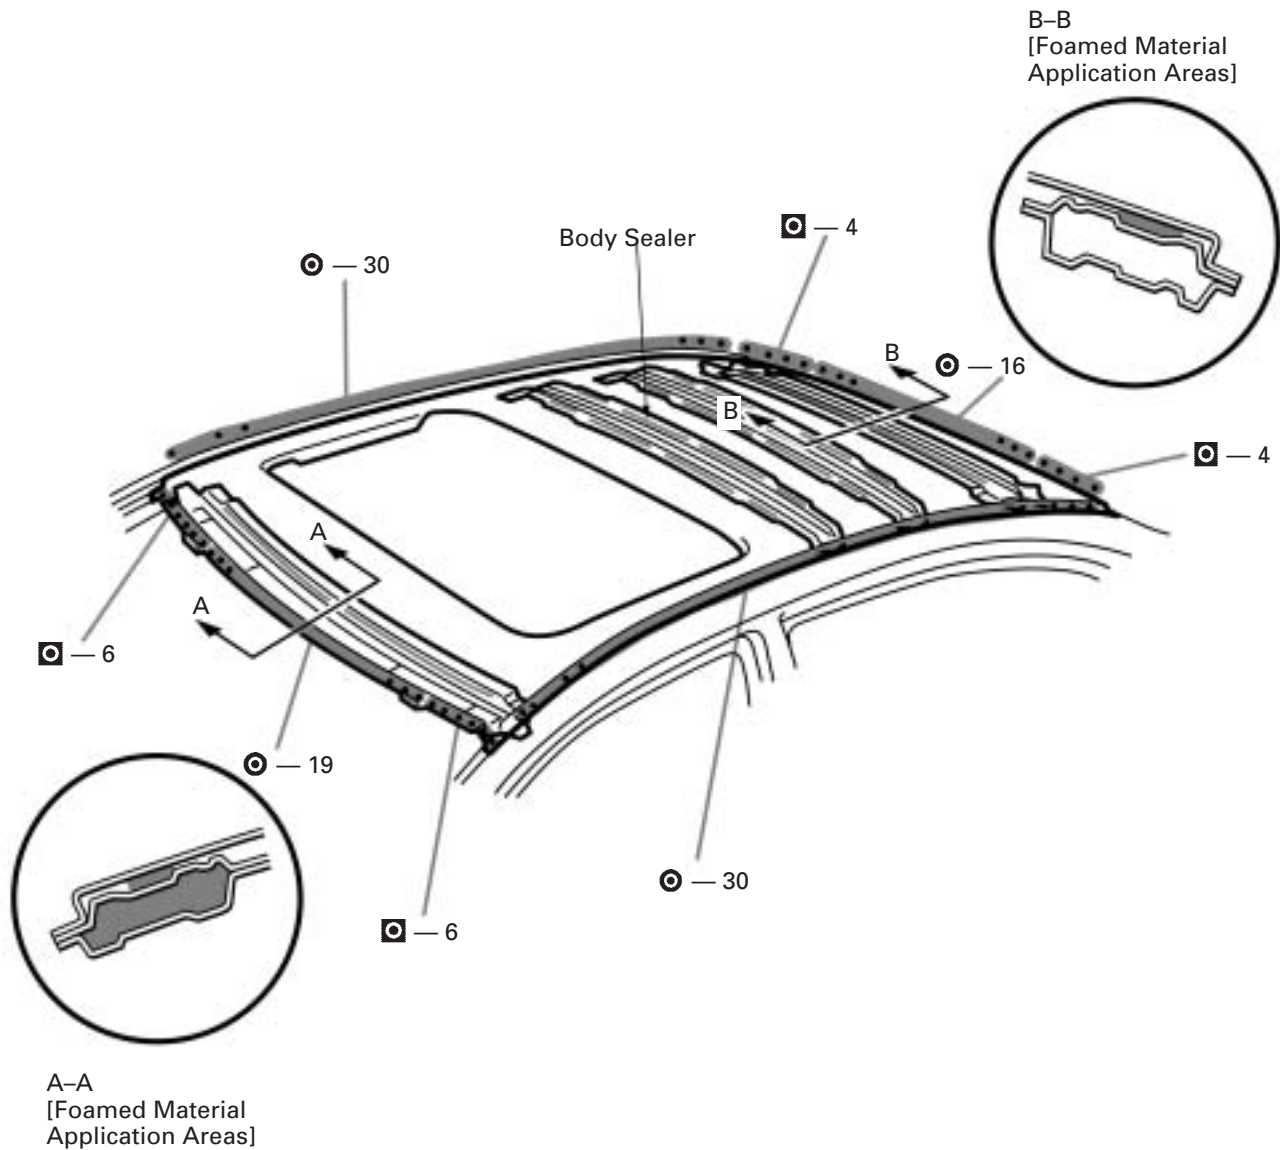

1. Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back window opening frame.
2. Apply foamed material to the pillar section.

HINT:

- 1) Apply just enough sealer for the new parts to make contact.
- 2) For other sealing points, refer to section AR.

