

BOOVE OF

INSTALLATION


1. INSTALL ROOF HEADLINING

- (a) Slide the roof headlining rearward to connect the hook to the body.
- (b) Fasten the fastener tape and install the 3 clips to the body.

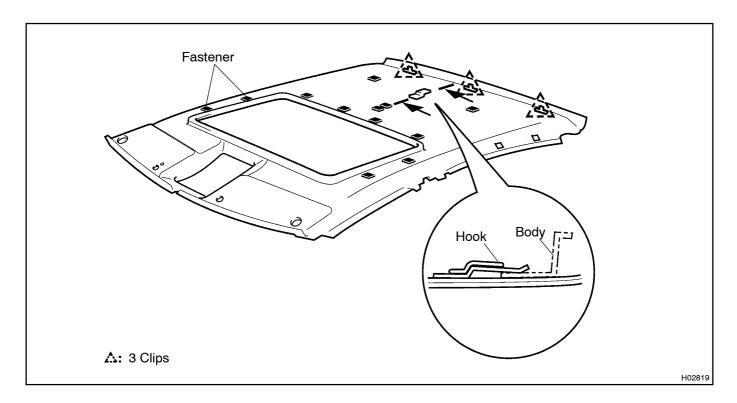




2. **INSTALL ROOF SIDE INNER GARNISHES** Install the roof side inner garnishes to the body.




3. INSTALL CENTER PILLAR UPPER GARNISHES Install center pillar upper garnishes with the 4 screws.

LEXUS GS300 (RM588E)



$\textbf{4.} \\ \\ \textbf{[CENTER[PILLAR[LOWER[GARNISHES}$

Install@hecenter@illar@ower@arnishes@o@hecedy.



5. INSTALL THESE PARTS:

- (a) Rear[\$eat[\$ide[garnishes
- (b) Rear personal ights
- (c) Front pillar garnishes
- (d) Rear door opening trims
- (e) Front door opening trims
- (f) Rear door nside scuff plates
- (g) Front door inside scuff plates
- (h) ☐ Assist grips
- (i) Sun visors and holders
- (j) Rear seat

(See page BO-120)

6. INSTALL MAP LAMP ASSEMBLY

- (a) Connect the connector.
- (b) Install the map lamp assembly with the 4 screws.
- (c) Install the lens and cover.