
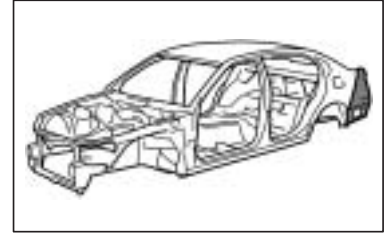
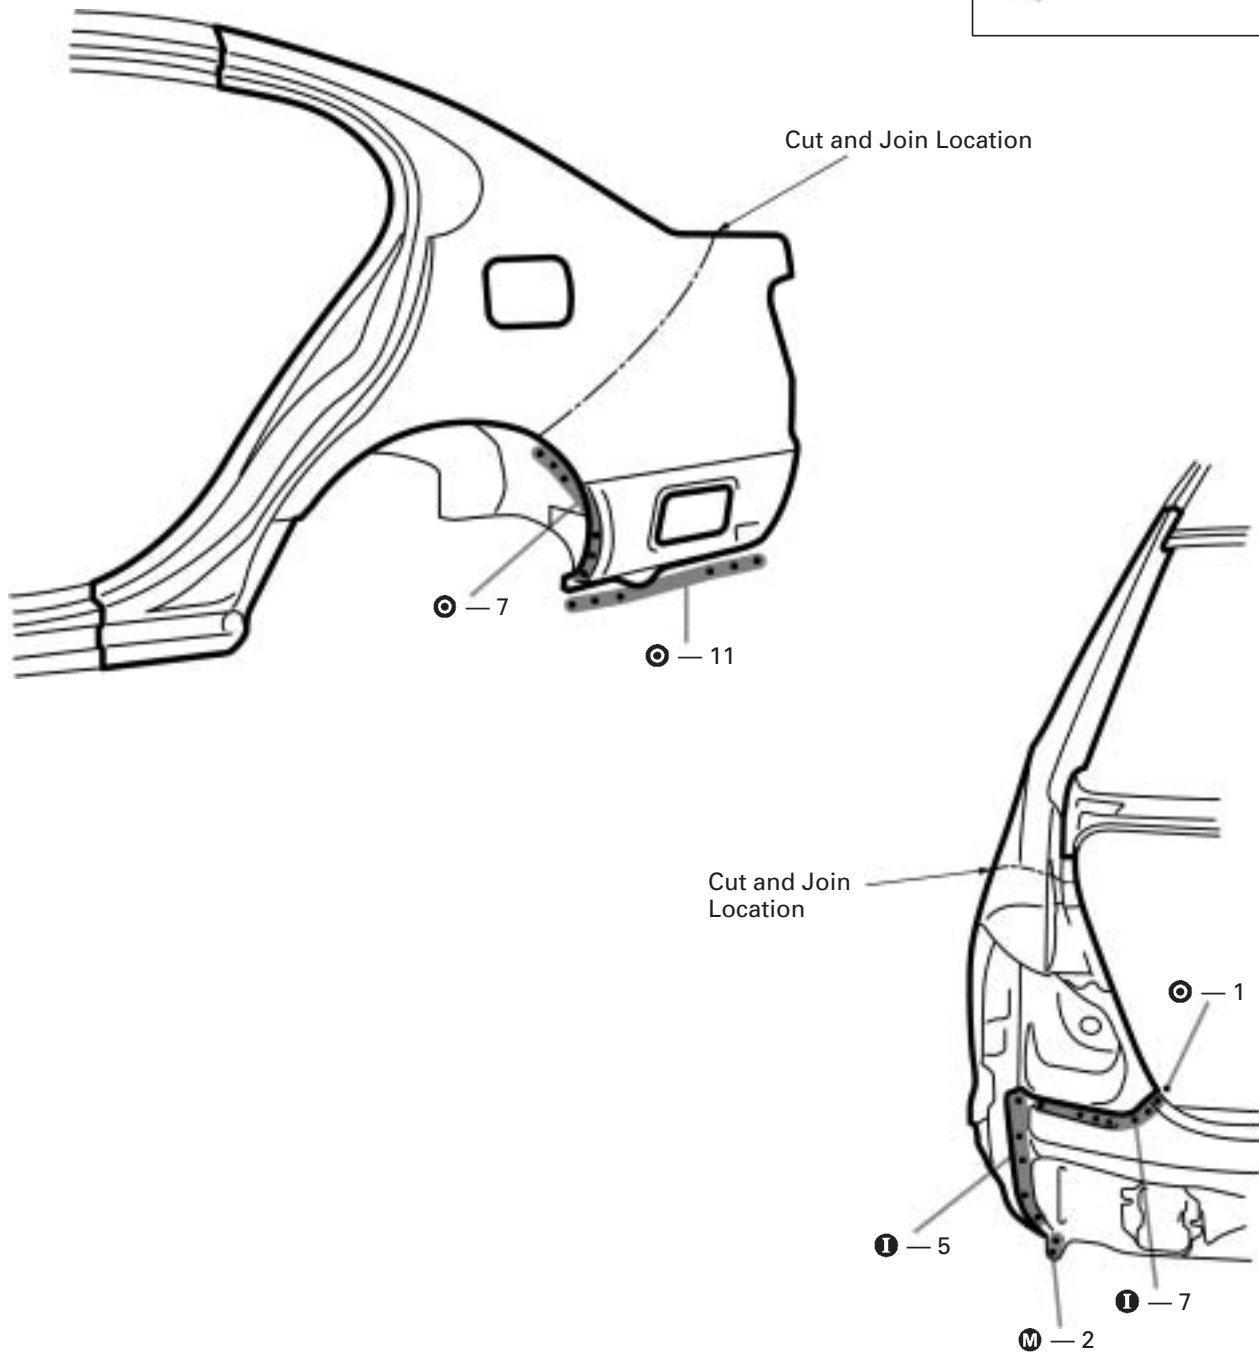


**QUARTER PANEL (CUT-P)****REMOVAL**

1. Cut and join the part at the location as shown above.

## INSTALLATION

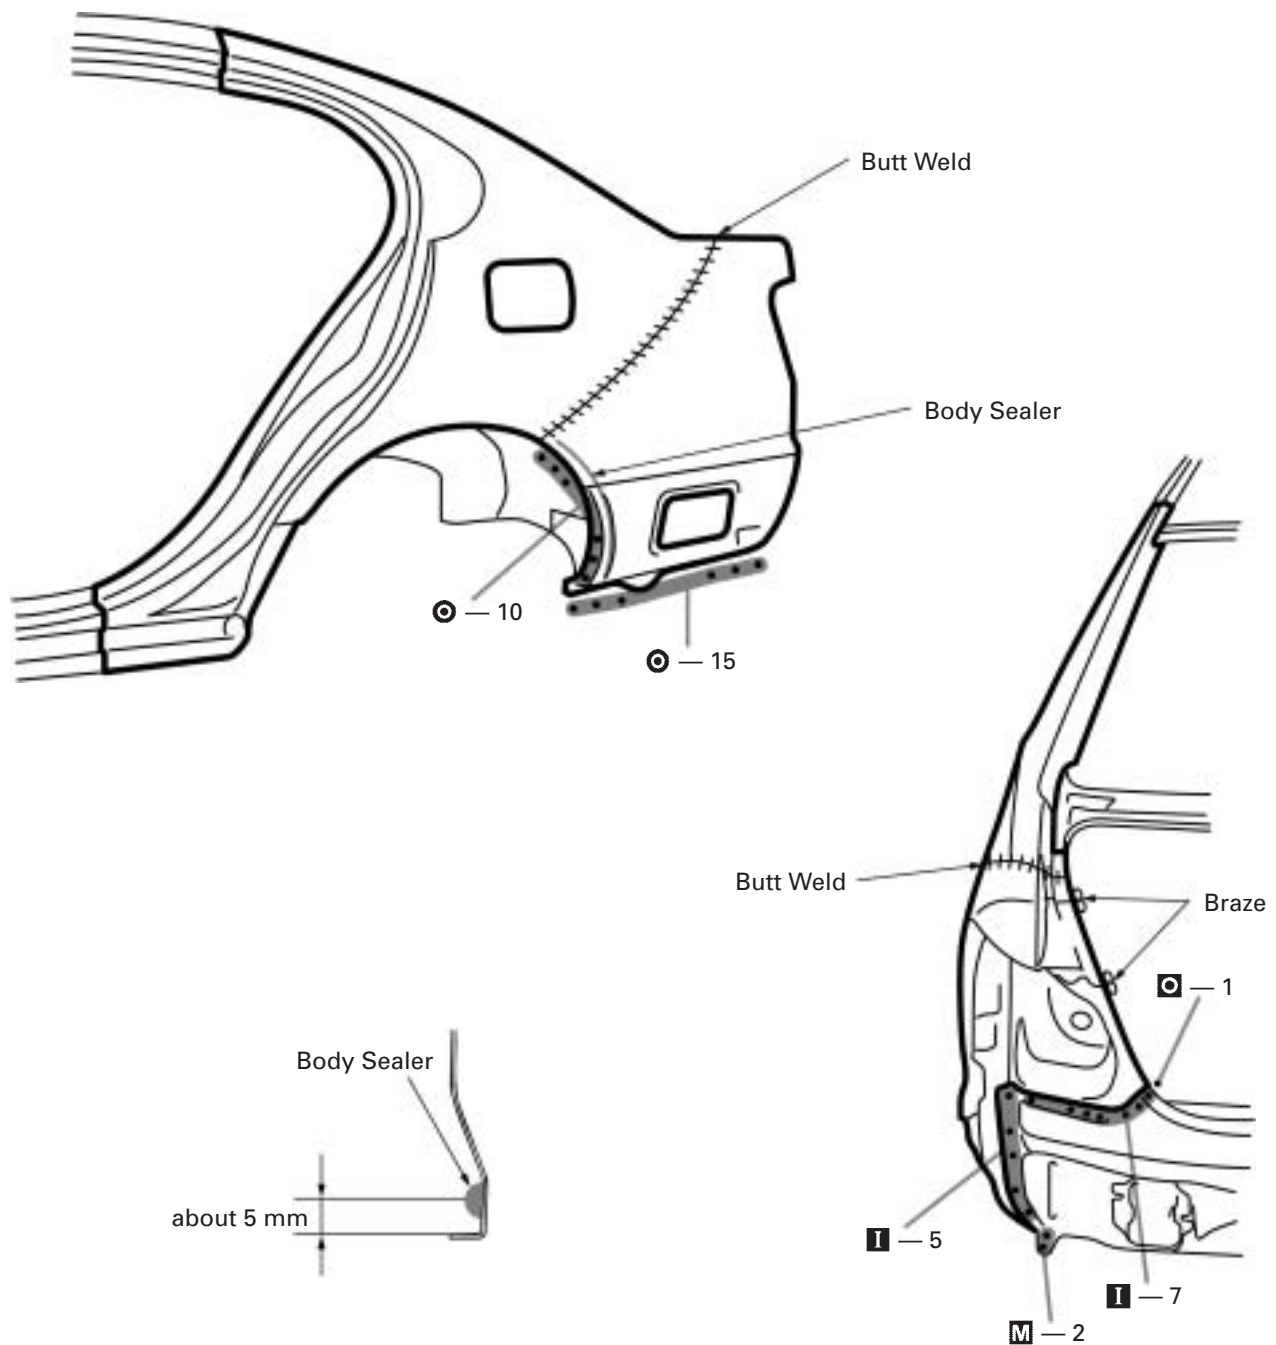

mm	in.
5	0.20

- Before temporarily installing the new parts, apply body sealer to the wheel arch.
- Temporarily install the new parts and check the fit of the luggage compartment door and rear combination light.

**HINT:**

- Apply body sealer about 5 mm (0.20 in.) from the flange, avoiding any oozing.
- Apply sealer evenly, about 3 – 4 mm (0.12 – 0.16 in.) in diameter.
- For other sealing points, refer to section AR.