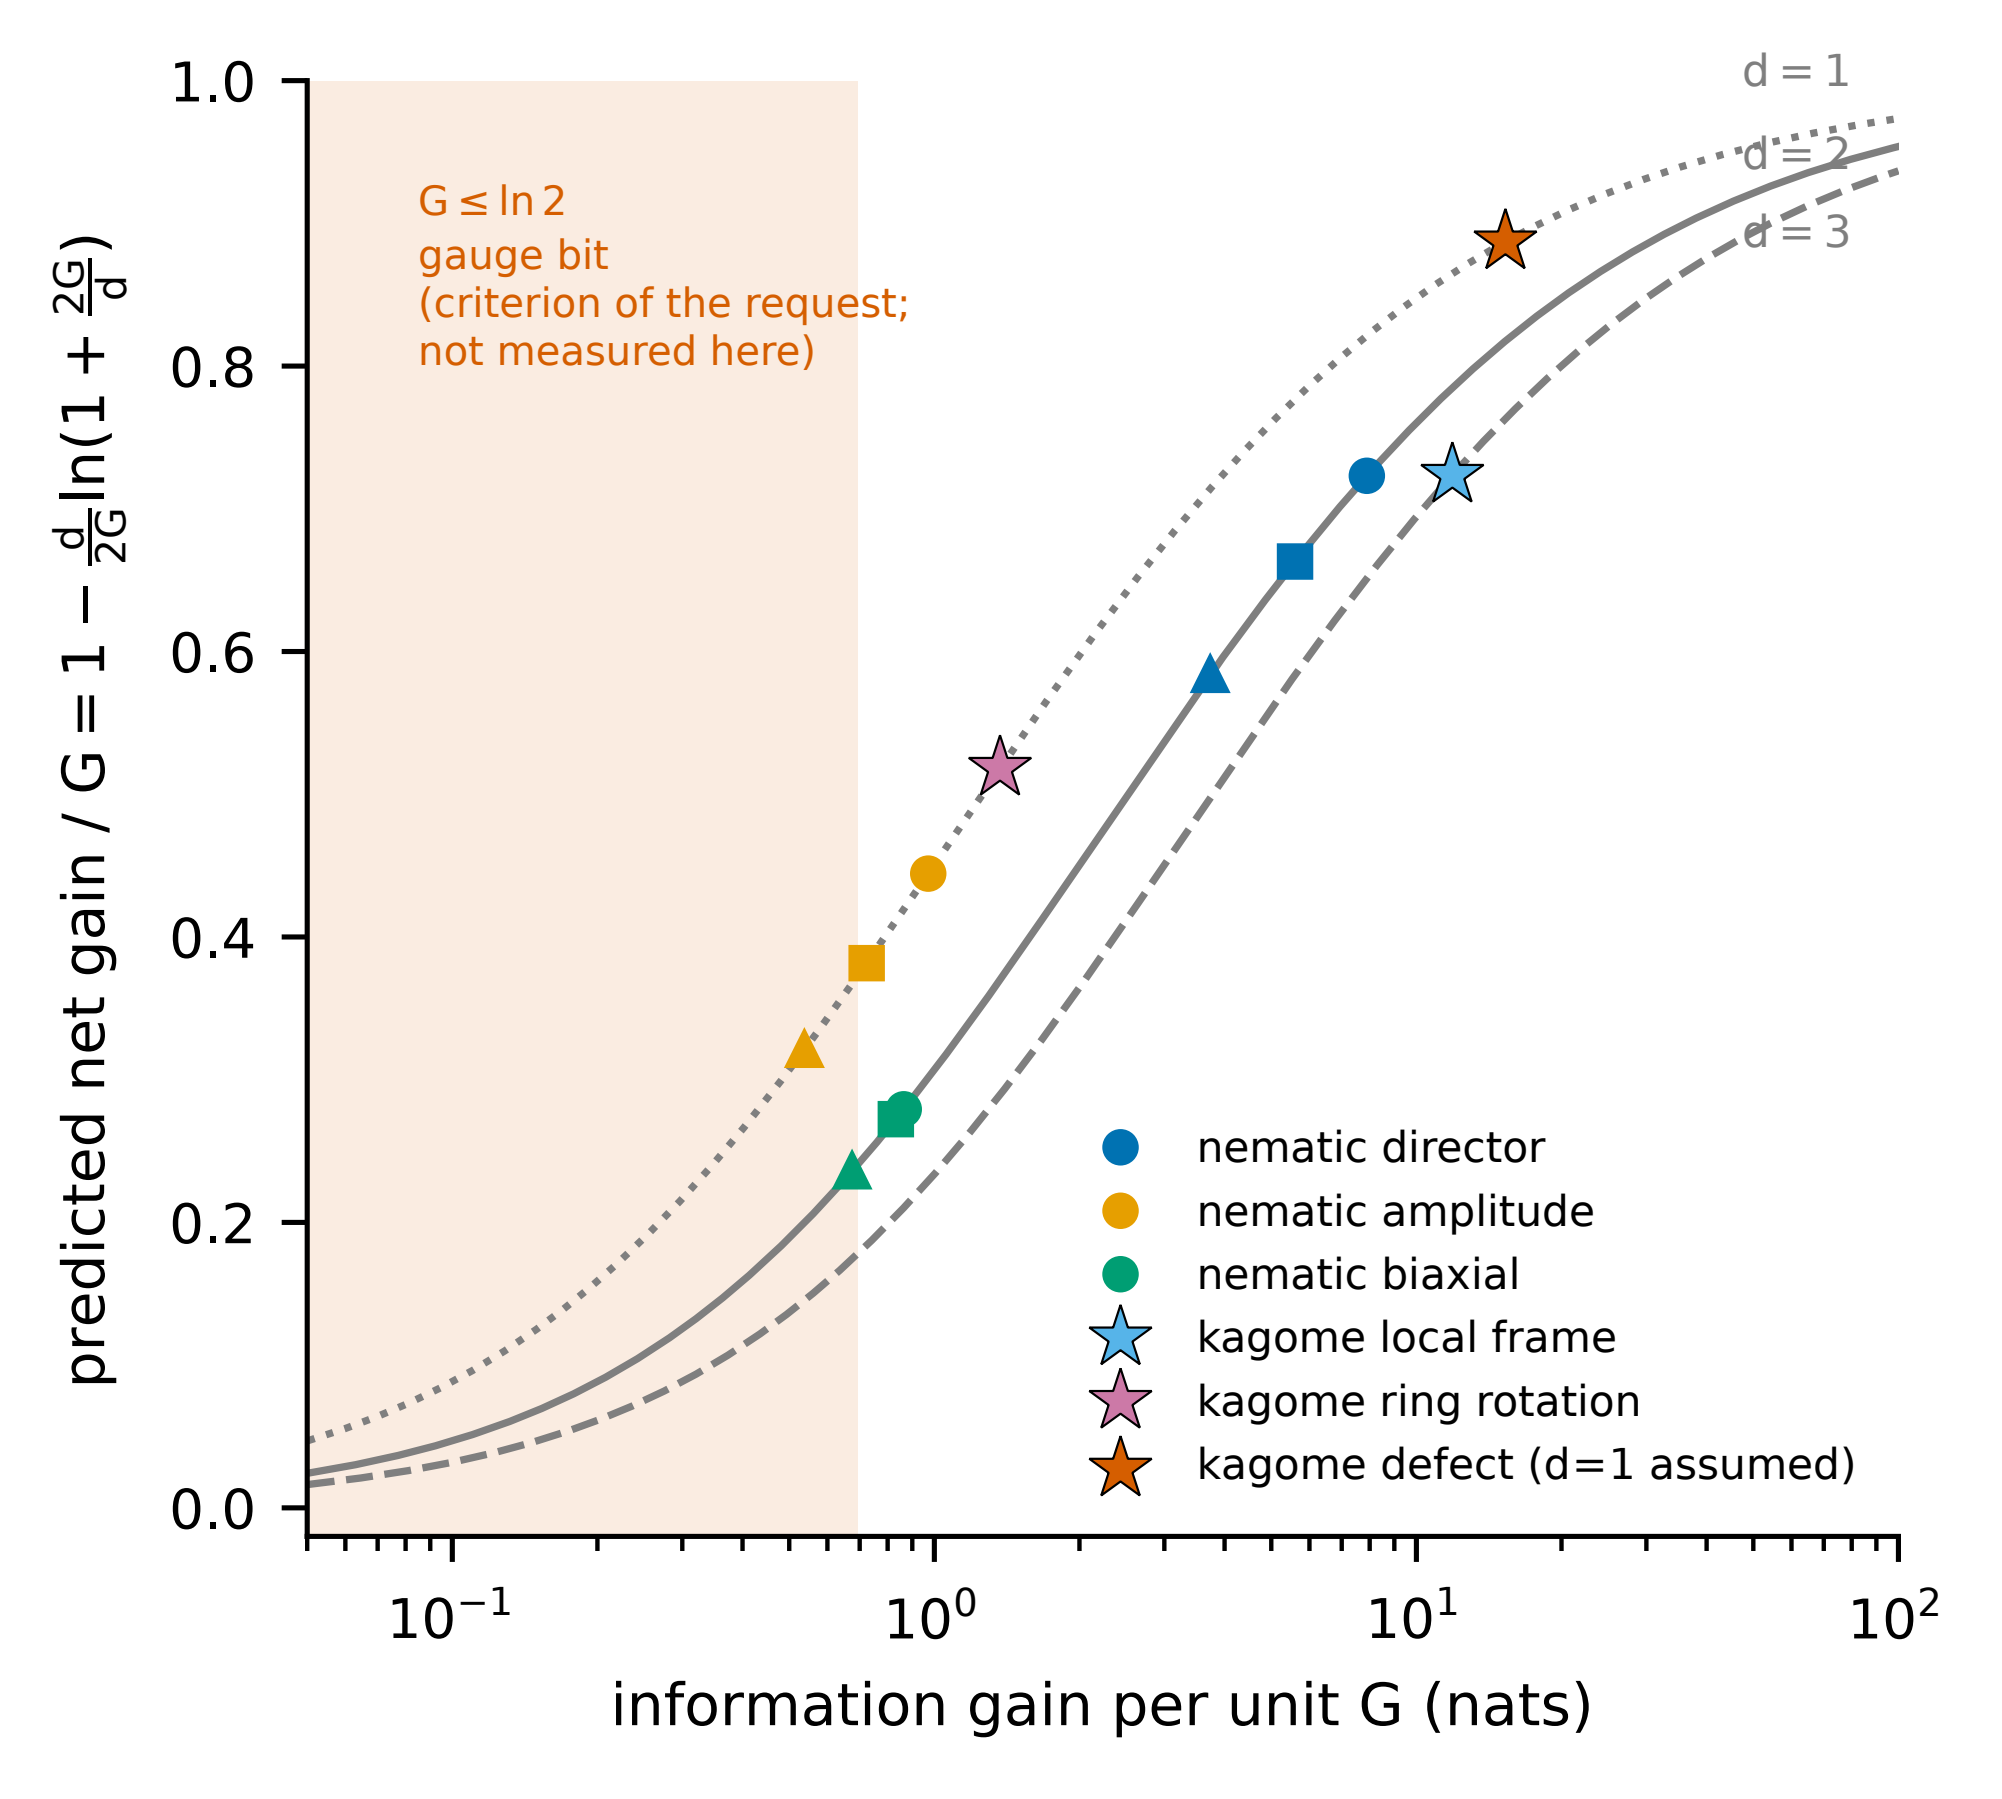
predicted net gain / G = 1 − d/2G ln(1 + 2G/d)
information gain per unit G (nats)
1.0
0.8
0.6
0.4
0.2
0.0
10^−1
10^0
10^1
10^2
G ≤ ln 2
gauge bit
(criterion of the request;
not measured here)
d = 1
d = 2
d = 3
nematic director
nematic amplitude
nematic biaxial
kagome local frame
kagome ring rotation
kagome defect (d=1 assumed)