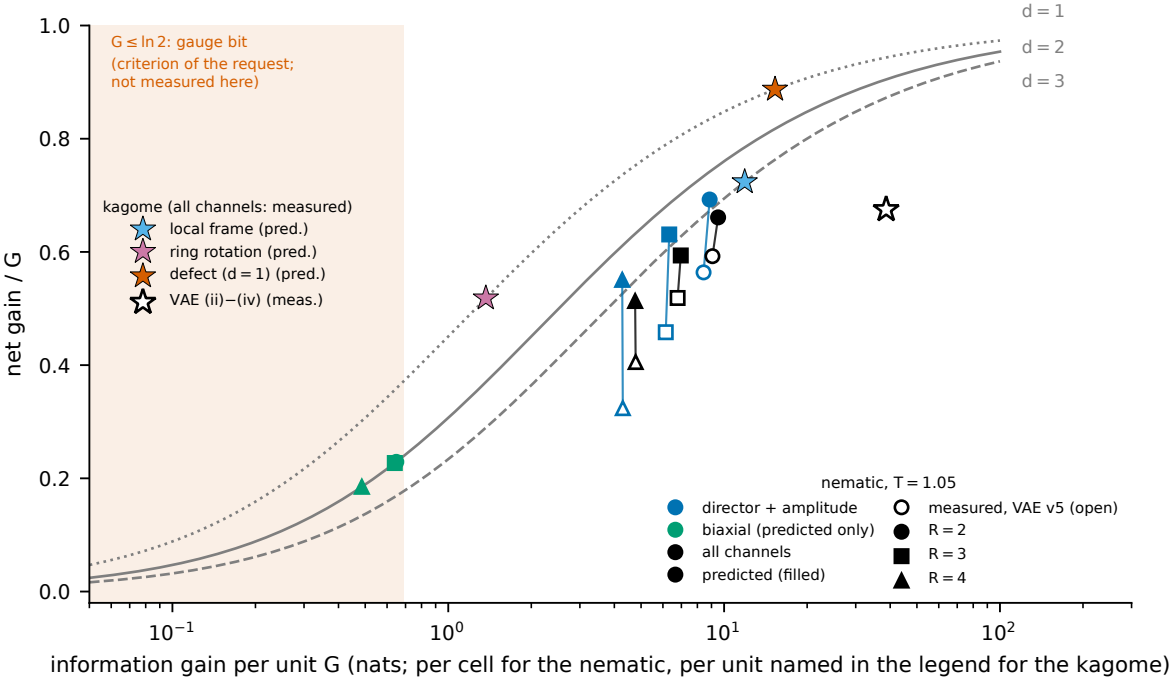
G ≤ ln 2: gauge bit
(criterion of the request;
not measured here)
d = 1
d = 2
d = 3
kagome (all channels: measured)
local frame (pred.)
ring rotation (pred.)
defect (d = 1) (pred.)
VAE (ii)−(iv) (meas.)
nematic, T = 1.05
director + amplitude
biaxial (predicted only)
all channels
predicted (filled)
measured, VAE v5 (open)
R = 2
R = 3
R = 4
net gain / G
1.0
0.8
0.6
0.4
0.2
0.0
10^{-1}
10^{0}
10^{1}
10^{2}
information gain per unit G (nats; per cell for the nematic, per unit named in the legend for the kagome)