

Specifications

Current Rate:3 AMP

Insulation Resistance:1000M Ω Min.

Contact Resistance:20m Ω Max.

Dielectric voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0

©Standard:P.B.T

Contact Pin:Copper Alloy

ORDER INFORMATION

P H 1 D 2 5 - 1 5 0 G B 6,0/28,8/3,0 - L

©Standard Recommend


No. of contacts per row

©Grade/Finish

©Black Insulator

Pin Ø
L=28.8
B=3.0

L:RoHS + P.B.T

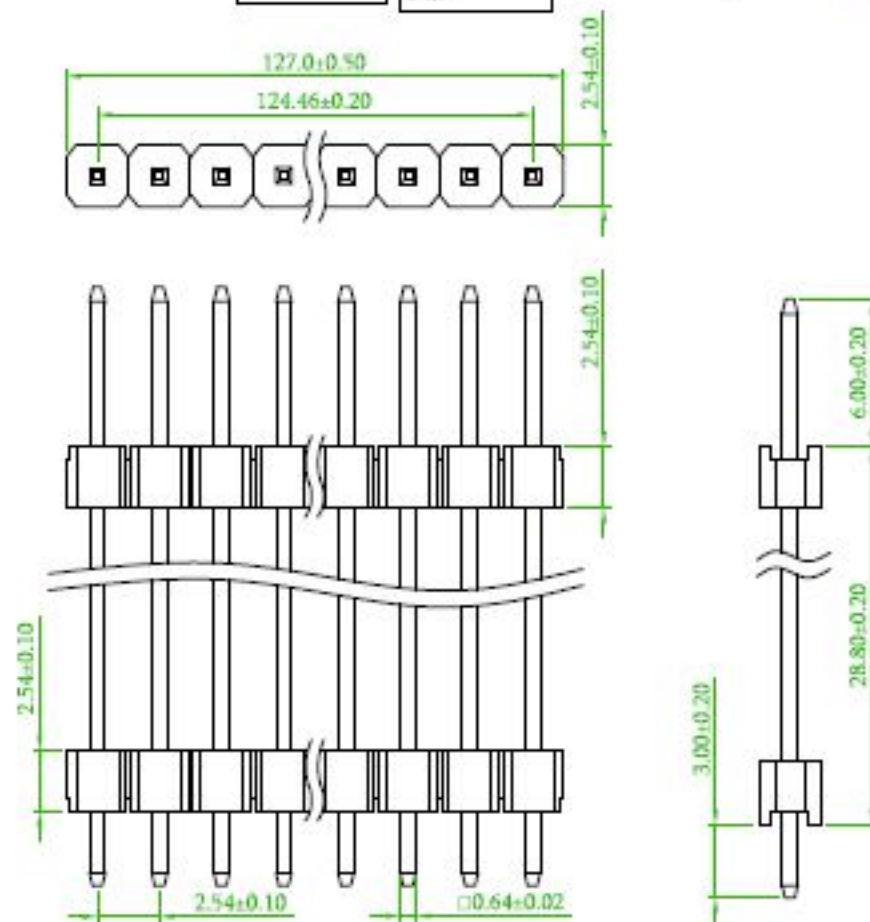

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	PIN HEADER 2.54mm STACK STRAIGHT TYPE PLASTIC HEIGHT 2.5mm					
	品號 PART NO.	PH1D25-150GB6,0/28,8/3,0-L	日期 DATE	2011/03/01	繪圖 DRAWN	Sinnys
圖號 DRAWING NO.	PH1D25-150GB6,0/28,8/3,0-L	版本 REV.	A	核對 CHECKED	James	Kelvin
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核准 APPROVED		
公差 TOLERANCE	X ± 0.35 XX ± 0.25	單位 UNIT	mm			