
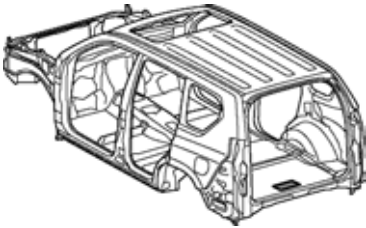


## REAR FLOOR CROSSMEMBER NO. 3 (ASSY)

 <p>F43890A</p>	<p>With the rear floor pan removed.</p> <p>Symbol meaning</p> <table border="1"> <tr> <td>REMOVAL</td><td>▲ : Remove Weld Points</td></tr> <tr> <td>INSTALLATION</td><td>■ : Plug Weld</td></tr> </table> <p>F43332B</p>	REMOVAL	▲ : Remove Weld Points	INSTALLATION	■ : Plug Weld
REMOVAL	▲ : Remove Weld Points				
INSTALLATION	■ : Plug Weld				

### REMOVAL-INSTALLATION

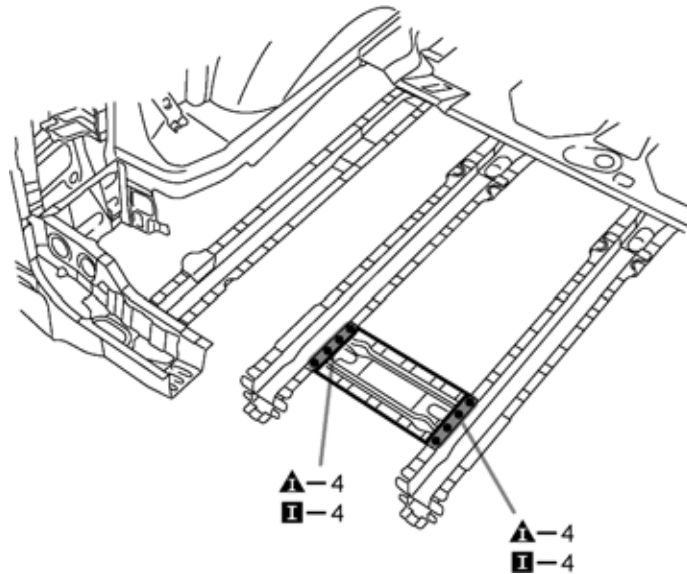

F43332

#### INSTALLATION POINT

- 1 After welding, apply undercoating to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.