


Tandy 1000 Internal 5.25" Adapter Instructions


WARNING: Please check your Tandy 1000 cable config **BEFORE** using my adapters - Some Tandy 1000's (eg TL/3) have both the **HX Style "Flipped / Rotated" connector** and Standard Shugart connector orientation on the same Floppy Cable. Many 1000's have **12v** in the Floppy cable and it will damage your drives and or system if you use these Adapters incorrectly!

--> [Here's how you can Check](#) <--


If your **SL/2, TX, TL, TL/2, TL/3, RL, RLX or RSX** Floppy cable has the Ground pins on any of its connectors "flipped" relative to the notch, you can remove the notch with a pair of side cutters:

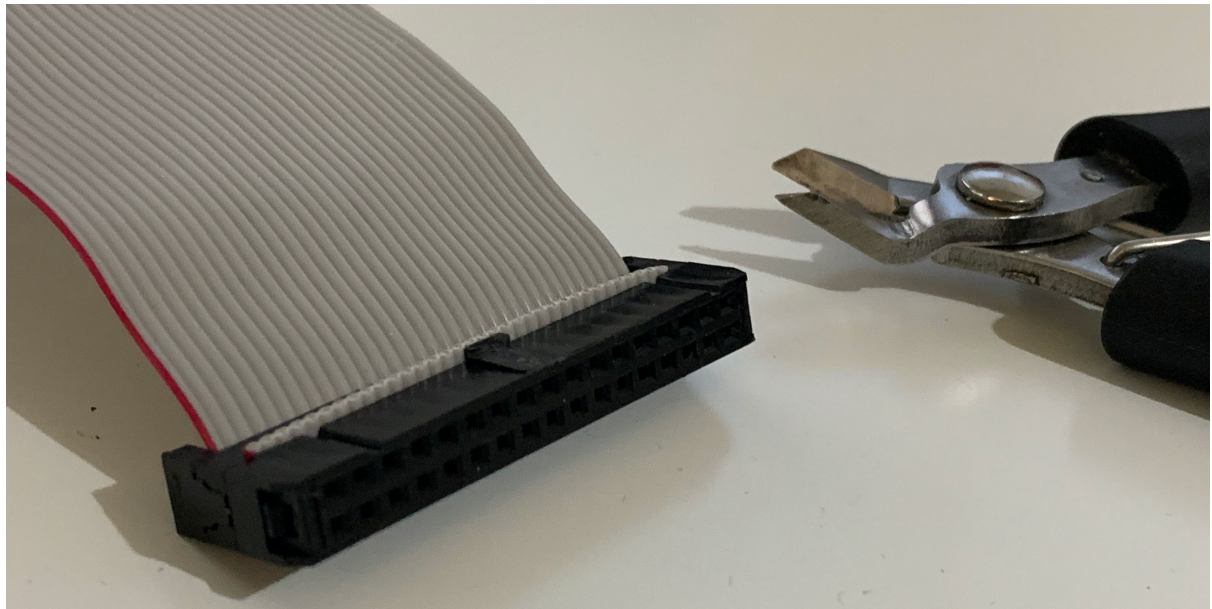


And then insert the connector into the adapter "upside down" so what's left of the notch, is on the bottom relative to the gap in the shroud.

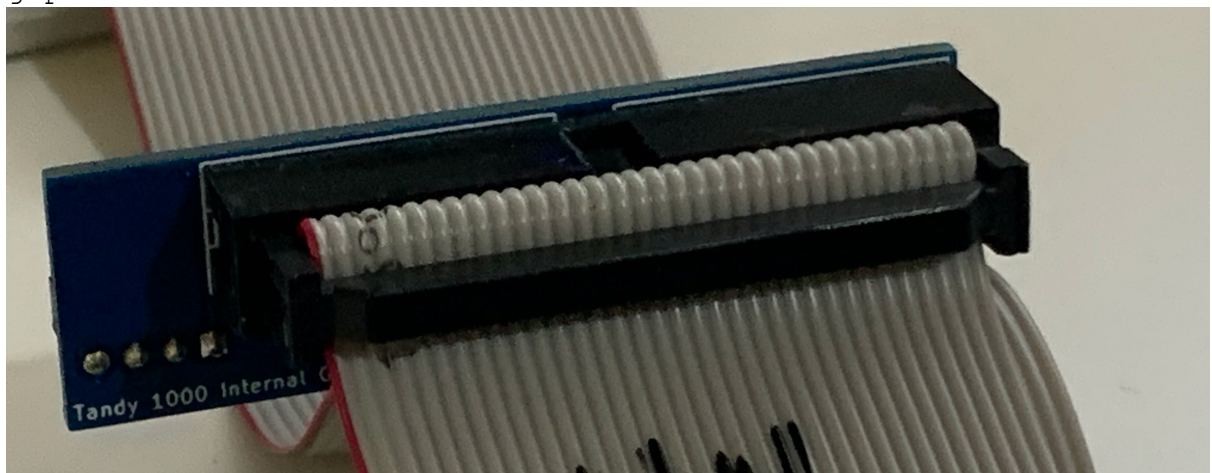

The Adapter is NOT Keyed but MUST only be installed one way – with the connector at the top as shown below.

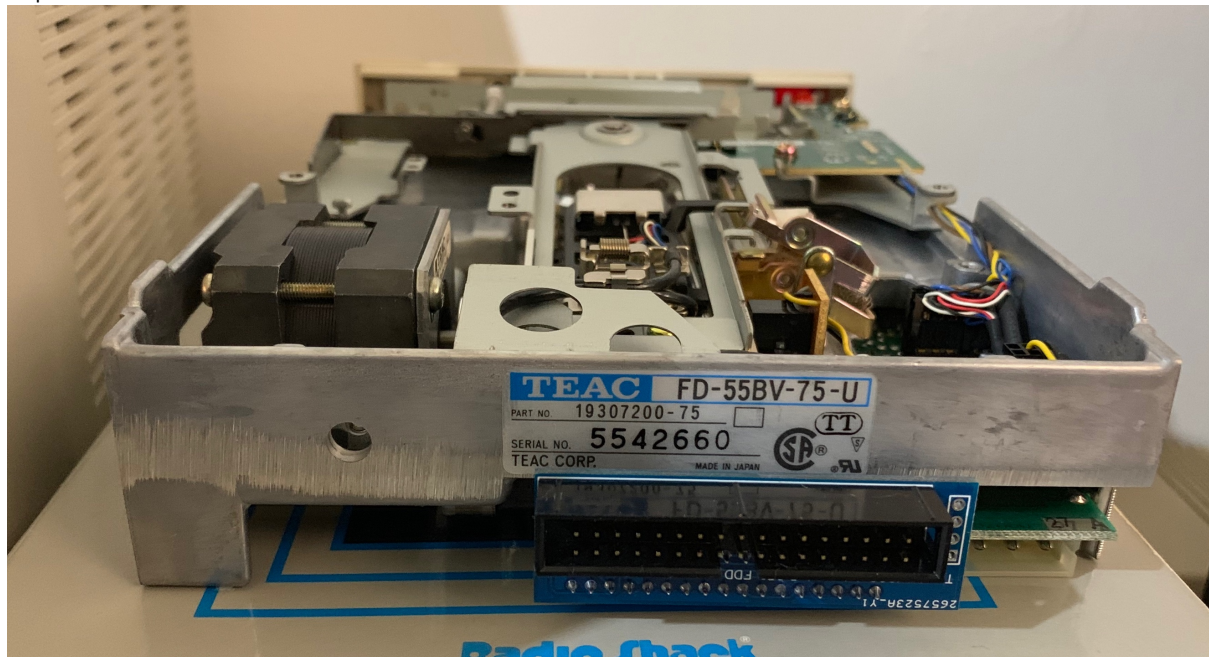

Make sure you select the correct drive letter for your Floppy Drive before installation. On most drives, DS0 = A, DS1 = B etc.

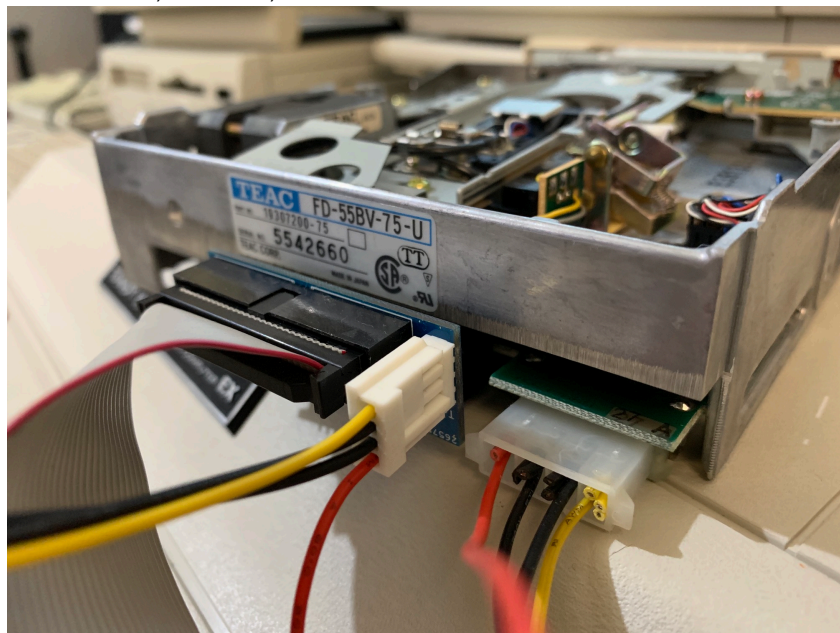

Thanks for buying my product, I hope it provides you with as much enjoyment as I had making them.
Regards dJOS