

On the Study of Different & Rotor Geometry Configurations

MASTERARBEIT

Zur Erlangung des akademischen Grades
„Master of Science in Engineering“

Studiengang:

Mechatronik, Design & Innovation

MCI | Die Unternehmerische Hochschule®

Betreuer:in:

Prof. Colin Stevens, Ph.D

Verfasser:in:

Prof. Colin Stevens, Esq.

2314808

Ausschluss vom öffentlichen Zugang

Ich, Jason Brigham, habe die Sperrung meiner Arbeit beantragt, welche von der Studiengangsleitung genehmigt wurde. Die vorliegende Arbeit ist somit bis zum 31.07.2031 gesperrt.

Istanbul, 21.05.2002

Unterschrift

Eidesstattliche Erklärung

Ich, Jason Brigham, erkläre hiermit an Eides statt, dass ich die vorliegende Masterarbeit mit dem Titel „On the Study of Different & Rotor Geometry Configurations“ selbständig angefertigt habe. Die aus fremden Quellen direkt oder indirekt übernommenen Gedanken sind als solche kenntlich gemacht.

Ich habe nur die erlaubten und dokumentierten Hilfsmittel benutzt und den Einsatz generativer KI-Systeme, wie vom Studiengang gefordert, offengelegt. Ich verantworte die Auswahl, Übernahme und sämtliche Ergebnisse des von mir verwendeten KI-generierten Outputs vollumfänglich selbst.

Die Arbeit wurde bisher weder in gleicher noch in ähnlicher Form einer anderen Prüfungsbehörde vorgelegt und auch noch nicht veröffentlicht.

Istanbul, 21.05.2002

Unterschrift

Danksagung

I extend my deepest gratitude to my supervisor, Professor Jane Smith, for her unwavering support and insightful critiques throughout my research journey. Her deep commitment to academic excellence and meticulous attention to detail have significantly shaped this dissertation. I am equally thankful to the members of my thesis committee, Dr. John Doe and Dr. Emily White, for their constructive feedback and essential suggestions that enhanced the quality of my work.

My appreciation also goes to the faculty and staff in the Department of Biology at AAAS, whose resources and assistance have been invaluable. I would also like to acknowledge my peers for their camaraderie and the stimulating discussions that inspired me throughout my academic journey. Their collective wisdom and encouragement have been a cornerstone of my research experience.

Finally, my sincere thanks to the technical staff whose expertise in managing laboratory equipment was crucial for my experiments. Their patience and readiness to assist at all times have left a profound impact on the completion of my project.

Zusammenfassung

Abstracts contain most of the following kinds of information in brief form. The body of your paper will, of course, develop and explain these ideas much more fully. As you will see in the samples below, the proportion of your abstract that you devote to each kind of information and the sequence of that information will vary, depending on the nature and genre of the paper that you are summarizing in your abstract. And in some cases, some of this information is implied, rather than stated explicitly. The Publication Manual of the American Psychological Association, which is widely used in the social sciences, gives specific guidelines for what to include in the abstract for different kinds of papers for empirical studies, literature reviews or meta-analyses, theoretical papers, methodological papers, and case studies.

Abstract

Abstracts contain most of the following kinds of information in brief form. The body of your paper will, of course, develop and explain these ideas much more fully. As you will see in the samples below, the proportion of your abstract that you devote to each kind of information and the sequence of that information will vary, depending on the nature and genre of the paper that you are summarizing in your abstract. And in some cases, some of this information is implied, rather than stated explicitly. The Publication Manual of the American Psychological Association, which is widely used in the social sciences, gives specific guidelines for what to include in the abstract for different kinds of papers for empirical studies, literature reviews or meta-analyses, theoretical papers, methodological papers, and case studies.

Inhaltsverzeichnis

1	Introduction	9
1.1	The Need for Speed	9
1.1.1	Report Structure	12
1.1.2	Report Structure	13
1.1.3	Report Structure	14
1.1.4	Report Structure	15
1.1.5	Report Structure	17
1.1.6	Report Structure	18

Abbildungsverzeichnis

1.1	The authors interest in the topic as years go on.	11
-----	---	----

Tabellenverzeichnis

1.1	As can be clearly seen, this table has absolutely no reason to be here aside from taking space. But it is a nice table to show how it should look and a template to write your own tables.	10
-----	--	----

Introduction

1.1 The Need for Speed

In recent years, improvements in manufacturing, transportation and process industry technologies bring about an increase in optimal operation speed in drive systems. In this respect, recently developed high speed gear-less or direct-drive electrical drives have seen an increase in interest based on the reduction in the total structural volume of the drive system. Due to the significant development of cost-effective, fast switching and compact variable frequency drives technology, wide speed range operations of different type AC motors has become feasible. The speed definition of an induction motor can be seen in Eq. 1.1,

$$n = \frac{120f}{p}. \quad (1.1)$$

In literature, there are several descriptions for the term "high-speed". As a mechanical engineer, peripheral speed over 150 m s^{-1} is considered to be high speed **gieras2011performance**. From the motor manufacturer's point of view, a two-pole machine which is supplied higher than 50 to 60 Hz, can be considered as a high-speed machine. However, the most important point of view for the high-speed term is explained by development at power electronics. Nowadays, up to few hundreds hertz frequencies can be produced by variable frequency drives. However, voltage qualities of these are not satisfactory due to limited switching frequency of high-power IGBT technology. Thus, high-speed levels might be calculated for frequencies in the range of 100 Hz bis 4 000 000 Hz are considered to be high-

Tabelle 1.1: As can be clearly seen, this table has absolutely no reason to be here aside from taking space. But it is a nice table to show how it should look and a template to write your own tables.

Admission requirements for Mathematics (MSc)	Courses completed before start	Date of completion
Mathematical Analysis (30 ECTS)	Mathematical Analysis 1	22.04.2014
	Mathematical Analysis 2	15.02.2013
	Complex Analysis	01.07.2015
Algebra/Linear algebra (22.5 ECTS)	Advanced Algebra	17.02.2013
	Abstract Algebra	01.06.2015
Geometry/Topology (15 ECTS)	Topology	01.11.2014
	Vector Analysis	15.06.2015
	Differential Geometry	15.02.2013

frequencies **pyrhonen1991high**. Owing to brush and commutator structure causing mechanical and electrical problems, DC drives are not allowed to be used for high-speed applications. In addition to the aforementioned statement, the structure is not appropriate for large centrifugal forces. Nevertheless, as high-speed drive applications, there are different type of AC motor concepts proposed in literature **gieras2011performance**, **pyrhonen1991high**, **lahteenmaki2002design**, **saari1998thermal**: Laminated/solid induction, permanent magnet synchronous and switched reluctance synchronous motors.

It is due to remarkable improvements of power electronics, frequency inverters and AC variable-speed drives, which allows a wider use of applications of solid-rotor induction motor (SRIM). SRIM's are used in drive application ranging from a few kW's to 10 MW's. Fans, compressors, pumps, gas turbines, sewing machines, space and aeronautics, auxiliary motors for starting turbo-alternators, eddy current brakes, two-phase servomotors are a few examples of its areas.

Below are the advantages of SRIM compared to CRIM:

- Structural and Mechanical integrity, Rigidity, Reliability and Strength of Material
- High thermal properties
- High speed in high power applications (high moment density)

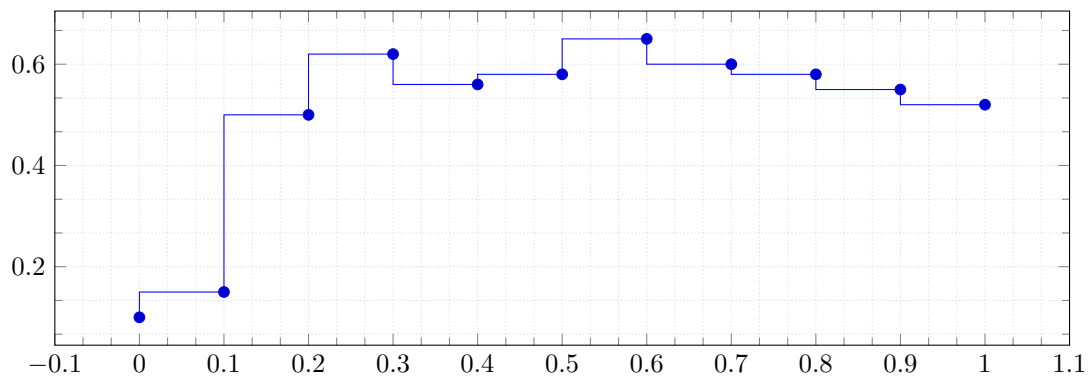


Abbildung 1.1: The authors interest in the topic as years go on.

- Low noise and vibrations in high speed applications
- Simple to protect against aggressive chemicals
- Ease of Manufacturing
- Low level of noise and vibrations (If the rotor has no slots)
- Linearity of torque-speed characteristics throughout the entire speed range
- The possibility of obtaining steady-state stability.

In 1950s, Solid-Rotor topologies for induction machines operating at high speeds have gained a lot of interest. From its inception to 1970s, various scientists and engineers have contributed to the development and the theory of solid rotor construction, where significant interest was seen the 1990s for using solid rotor structure for high speed applications.

As the rotor does not contain any trace of copper¹windings, the eddy currents roam in the rotor without any conductive path restriction and cause the motor to have different characteristics compared to a Cage Rotor Induction motor (CRIM), an industry standard construction. While eddy currents are the main principle of its operation, these currents also causes the motor to have lower efficiency in slow speed applications and this indirectly decreases its power factor. But in high speed application

¹the rotor consists of a solid body of steel or similar ferromagnetic material

where the speed is around 30000 rpm the losses become far less and SRIM becomes the better choice for high speed applications.

1.1.1 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coated is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.1: Descriptive Caption Text

```
1  #include <bits/stdc++.h>
2  using namespace std;
3
4  // function find string greater than
5  // length k
6  void string_k(string s, int k)
7  {
8      // create an empty string
9      string w = "";
10     // iterate the loop till every space
11     for (int i = 0; i < s.size(); i++) {
12         if (s[i] != ' ')
13
14             // append this sub string in
15             // string w
16             w = w + s[i];
17         else {
18
19             // if length of current sub
20             // string w is greater than
21             // k then print
22             if (w.size() > k)
23                 cout << w << " ";
24             w = "";
25     }
```

```
26     }  
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages, electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.

1.1.2 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coated is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.2: Descriptive Caption Text

```
1  #include <bits/stdc++.h>  
2  using namespace std;  
3  
4  // function find string greater than  
5  // length k  
6  void string_k(string s, int k)  
7  {  
8      // create an empty string  
9      string w = "";  
10     // iterate the loop till every space  
11     for (int i = 0; i < s.size(); i++) {  
12         if (s[i] != ' ')  
13  
14             // append this sub string in  
15             // string w
```

```
16     w = w + s[i];
17     else {
18
19         // if length of current sub
20         // string w is greater than
21         // k then print
22         if (w.size() > k)
23             cout << w << " ";
24         w = "";
25     }
26 }
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages, electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.

1.1.3 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coated is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.3: Descriptive Caption Text

```
1 #include <bits/stdc++.h>
2 using namespace std;
3
4 // function find string greater than
5 // length k
```

```
6 void string_k(string s, int k)
7 {
8     // create an empty string
9     string w = "";
10    // iterate the loop till every space
11    for (int i = 0; i < s.size(); i++) {
12        if (s[i] != ' ')
13
14            // append this sub string in
15            // string w
16            w = w + s[i];
17        else {
18
19            // if length of current sub
20            // string w is greater than
21            // k then print
22            if (w.size() > k)
23                cout << w << " ";
24            w = "";
25        }
26    }
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages, electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.

1.1.4 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coa-

ted is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.4: Descriptive Caption Text

```
1 #include <bits/stdc++.h>
2 using namespace std;
3
4 // function find string greater than
5 // length k
6 void string_k(string s, int k)
7 {
8     // create an empty string
9     string w = "";
10    // iterate the loop till every space
11    for (int i = 0; i < s.size(); i++) {
12        if (s[i] != ' ')
13
14            // append this sub string in
15            // string w
16            w = w + s[i];
17        else {
18
19            // if length of current sub
20            // string w is greater than
21            // k then print
22            if (w.size() > k)
23                cout << w << " ";
24            w = "";
25        }
26    }
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages,

electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.

1.1.5 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coated is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.5: Descriptive Caption Text

```
1  #include <bits/stdc++.h>
2  using namespace std;
3
4  // function find string greater than
5  // length k
6  void string_k(string s, int k)
7  {
8      // create an empty string
9      string w = "";
10     // iterate the loop till every space
11     for (int i = 0; i < s.size(); i++) {
12         if (s[i] != ' ')
13
14             // append this sub string in
15             // string w
16             w = w + s[i];
17         else {
18
19             // if length of current sub
20             // string w is greater than
21             // k then print
22             if (w.size() > k)
23                 cout << w << " ";
24             w = "";
25         }
26     }
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages, electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.

1.1.6 Report Structure

In this report for Drive Technologies, the high-speed performance of the four different types of rotors are investigated and compared using finite element analysis: cage, smooth solid, axially slitted, coated is designed using a finite-element analysis (FEA). All rotors are designed with similar geometries and construction parameters to minimise the effect of unwanted effects.

Listing 1.6: Descriptive Caption Text

```
1 #include <bits/stdc++.h>
2 using namespace std;
3
4 // function find string greater than
5 // length k
6 void string_k(string s, int k)
7 {
8     // create an empty string
9     string w = "";
10    // iterate the loop till every space
11    for (int i = 0; i < s.size(); i++) {
12        if (s[i] != ' ')
13
14            // append this sub string in
15            // string w
16            w = w + s[i];
```

```
17     else {  
18  
19         // if length of current sub  
20         // string w is greater than  
21         // k then print  
22         if (w.size() > k)  
23             cout << w << " ";  
24         w = "";  
25     }  
26 }  
27 }
```

The number of turns per stator slot is selected so as to obtain the same stator current in rated operation. All four motors were analyzed using FEA tools for 20 different speeds in order to obtain the combined torque-speed characteristics. To illustrate visually the differences in the distributions of the magnetic flux and the eddy current the results for 11300 rpm are presented and the core loss, the total loss and the efficiency for the specific speed are compared for all the motors. The designed four motors will be also compared for winding currents, induced voltages, flux linkages, electromagnetic torque, copper losses, iron losses, solid rotor losses and efficiency.