
DID 60 standard roller chain

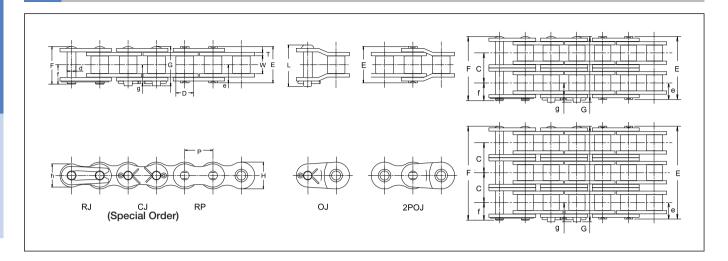

Dimensions

Chain No.		Pitch		Roller	Pin							Transver se Pitch		Plate	win. rensile							DID Max. Allowable		Approx.	
DID	JIS	P	Width W	dia. D	d	E	F	G	L	е	f	g	С	Т	H h	h	Stre kN	ngth kgf	Stre kN	ngth kgf	Stre kN	ngth kgf	kN	ad kgf	Weight (kg/m)
DID60	60					25.4	26.9	27.9	29.8								31.3	3,180	35.3	3,580	44.1	4,480	9.31	950	1.53
DID60-2	60-2					48.3	49.8	50.9	52.5								62.6	6,360	70.6	7,170	88.2	8,950	15.8	1,600	3.03
DID60-3	60-3	19.05	12.70	11.91	5.96	71.2	72.7	73.7	75.3	12.7	14.3	15.1	22.8	2.40	18.1	15.6	93.9	9,530	106	10,760	132	13,400	23.3	2,370	4.51
DID60-4	60-4					94.0	95.5	96.5	96.5								_	_	141	14,310	176	17,870	30.7	3,120	6.03
DID60-5	60-5					116.8	118.8	119.3	119.3								_	_	177	17,970	221	22,440	36.3	3,690	7.53

Note: The values of average tensile strength and Max. allowable tension are for chains.

Max. Kilowatt Ratings DID 60

Unit (kW)

																				()		
No. of Teeth of Small			Sr	nall Sp	rocket	revolu	utions	per mi	nute (r	pm) (See P13	2 for the	details	of type	of lubric	cation A	, B and	C.)				
No. of Teeth of	50	100	200	500	700	900	1200	1400	1500	1600	1800	2000	2200	2400	2600	2800	3000	3500	3800	4000		
Small Sprocket		Α		В													С					
11	1.26	2.36	4.40	10.1	12.7	12.7	8.84	7.01	6.32	5.74	4.81	4.10	3.56	3.12	2.77	2.48	2.23	1.77	1.56	1.45		
12	1.39	2.59	4.84	11.0	13.9	13.9	10.1	7.99	7.20	6.54	5.48	4.68	4.05	3.56	3.15	2.82	2.54	2.02	1.78	1.65		
13	1.51	2.83	5.28	12.0	15.2	15.2	11.4	9.01	8.12	7.37	6.18	5.27	4.57	4.01	3.56	3.18	2.87	2.28	2.01	1.86		
14	1.64	3.06	5.72	13.1	16.7	16.7	12.7	10.1	9.08	8.24	6.90	5.89	5.11	4.48	3.98	3.56	3.21	2.54	2.25	2.08		
15	1.77	3.30	6.16	14.1	18.5	18.5	14.1	11.2	10.1	9.14	7.66	6.54	5.67	4.97	4.41	3.94	3.56	2.82	2.49	2.31		
16	1.89	3.54	6.60	15.1	20.4	20.4	15.5	12.3	11.1	10.1	8.44	7.20	6.24	5.48	4.86	4.35	3.92	3.11	2.75	2.54		
1 <i>7</i>	2.02	3.78	7.05	16.1	21.8	22.3	17.0	13.5	12.2	11.0	9.24	7.89	6.84	6.00	5.32	4.76	4.29	3.40	3.01	2.79		
18	2.15	4.02	7.50	17.1	23.2	23.7	18.5	14.7	13.2	12.0	10.1	8.60	7.45	6.54	5.80	5.19	4.68	3.71	3.28	3.04		
19	2.28	4.26	7.95	18.1	24.6	25.1	20.1	15.9	14.4	13.0	10.9	9.32	8.08	7.09	6.29	5.63	5.07	4.02	3.56	3.29		
20	2.41	4.50	8.40	19.2	26.0	26.6	21.7	17.2	15.5	14.1	11.8	10.1	8.73	7.66	6.79	6.08	5.48	4.35	3.84	3.56		
21	2.54	4.75	8.86	20.2	27.4	28.0	23.3	18.5	16.7	15.1	12.7	10.8	9.39	8.24	7.31	6.54	5.89	4.68	4.13	3.83		
22	2.67	4.99	9.32	21.3	28.8	29.5	25.0	19.8	17.9	16.2	13.6	11.6	10.1	8.84	7.84	7.01	6.32	5.01	4.43	4.10		
23	2.80	5.24	9.77	22.3	30.2	30.9	26.7	21.2	19.1	17.4	14.5	12.4	10.8	9.45	8.38	7.49	6.76	5.36	4.74	4.39		
24	2.94	5.48	10.2	23.4	31.6	32.5	28.5	22.6	20.4	18.5	15.5	13.2	11.5	10.1	8.93	7.99	7.20	5.71	5.05	4.68		
25	3.07	5.73	10.7	24.4	33.0	34.5	30.3	24.0	21.7	19.7	16.5	14.1	12.2	10.7	9.49	8.49	7.66	6.08	5.37	4.97		
28	3.47	6.48	12.1	27.6	37.3	40.9	35.9	28.5	25.7	23.3	19.5	16.7	14.5	12.7	11.3	10.1	9.08	7.20	6.37	-		
30	3.74	6.98	13.0	29.7	40.2	44.9	39.8	31.6	28.5	25.9	21.7	18.5	16.0	14.1	12.5	11.2	10.1	7.99	_	-		
32	4.01	7.48	14.0	31.9	43.1	48.1	43.9	34.8	31.4	28.5	23.9	20.4	17.7	15.5	13.8	12.3	11.1	8.80	_	-		
35	4.41	8.24	15.4	35.1	47.5	53.0	50.2	39.8	35.9	32.6	27.3	23.3	20.2	17.7	15. <i>7</i>	14.1	12.7	_	_	-		
40	5.10	9.52	17.8	40.6	54.9	61.3	61.3	48.6	43.9	39.8	33.4	28.5	24.7	21.7	19.2	17.2	15.5	_	_	-		
45	5.79	10.8	20.2	46.1	62.3	69.4	69.4	58.0	52.3	47.5	39.8	34.0	29.5	25.9	22.9	20.5				_		

Note: Values in the table above are for simplex chain only. For multiplex chains, please multiply the coefficient of multi-strand. (See "Chain Selection" on P120).