Product Data Sheet

Material	PP-MD polypropylene with mineral fillers (pipes and fittings)	
Diameters of pipes and fittings	DN50, DN75, DN110, DN125, DN160, DN200 mm According to EN 1451-1:2018	
Wall thickness	DN50 e=2,0 mm; DN75 e=2,3; DN110 e=3,4 mm; Dn125 e=3,9 mm; DN160 e=4,9 mm	
Application area	The „BD" application area according to EN 1451-1:2008, i.e. in the systems inside buildings and outside buildings, fixed onto the walls, or in the underground systems buried in the ground or embedded in concrete within the building structure.	
Other applications	Draining of roof areas in buildings with rainwater drainage systems up to 45m in height.	Technical Opinion issued by the Department of Material Engineering of the Central Mining Institute
Acoustic characteristics (tests carried out in the Fraunhofer Institute,Stuttgart)	Standard steel clamping rings with an elastomer insert 11 dB (0.5 l/s); 14 dB (1 l/s); 16 dB (2 l/s); 20 dB (4l/s)	
	Special BISMAT 1000 clamping rings ≤ 10 dB (0.5 l/s); ≤ 10 dB (1 l/s);13 dB (2 l/s); 16 dB (4l/s)	
Colour	Pipes	internal layer: white external layer: blue
	Fittings	blue
Density	1,4 g/cm^3	
Linear expansion coefficient	99,5×10-6 mm/mmoC	
Ring stiffness	SN ≥ 4 KN/m^2, series S16, DN110-DN200 > SN8	
Type of connection	Push-in spigot-and-socket pipe joints. Sockets with a factory-installed elastomer seal. DN110, DN125, DN160, and DN200 pipes and fittings with factory-installed triple lip seals that improve acoustic absorption and reliability of connections	
Fire resistance class	B2 (according to DIN 4102)	
Chemical resistance	Conveyance and drainage of sewage with pH value ranging from 2 to 12	
Halogen content	Without halogens (Cl, F, Br, J)	
Maximum sewage temperature	90°C - permanent flow; 95°C - temporary flow	
Min. installation temperature	- 20°C	
Special fittings	Steel clamping rings additionally protect pipes and fittings from withdrawing from socket	

About Dadex

Dadex was established as a public limited company in 1959. We started with the manufacturing of FC roofing systems at our facility in Hyderabad, under the dynamic leadership of our Founder Chairman, Mr. Kassim Dada. Being a forward-looking organization, his son, Mr. Sikander Dada kept up to date with the market, and was instrumental in the diversification with plastic piping systems. Presently we produce various thermoplastic systems such as UPVC, PP-R, PP-RCT, PP, PE.

Headquartered in Karachi, our two manufacturing facilities based in Hyderabad and Sundar Industrial Estate (near Lahore) are equipped with state of the art machinery. Our joint efforts have led Dadex to the ISO 9001, ISO 14001, ISO 45001 and PSQCA certifications.

We aim to set standards in every field we enter. Customer focus, quality and innovation are reflected in every aspect of our business. Offering customized solutions to a cross section of markets for over 66 years, Dadex today is a hallmark of trust and reliability.

We believe that our strength lies in delighting our customers. That is why providing quality products backed by round the clock technical support services are the Dadex promise to all our valued customers.

DADEX Eternit Limited

Dadex House, 34-A/1, P.E.C.H.S. Block-6, Shahrah-e-Faisal, Karachi.
UAN: (92-21) 111 000 789, Email: marketing@dadex.com.pk

Dadex Authorised Distributor for Polyduct


Burhani Traders
C786, Block C, Sector C, Main PWD Road, Islamabad.
Tel: 0303-8203417 | E-mail: juzer@burhanitraders.com

Feb. 2026

POLYDUCT

LOW NOISE SWV SYSTEM

SOIL, WASTE AND VENT

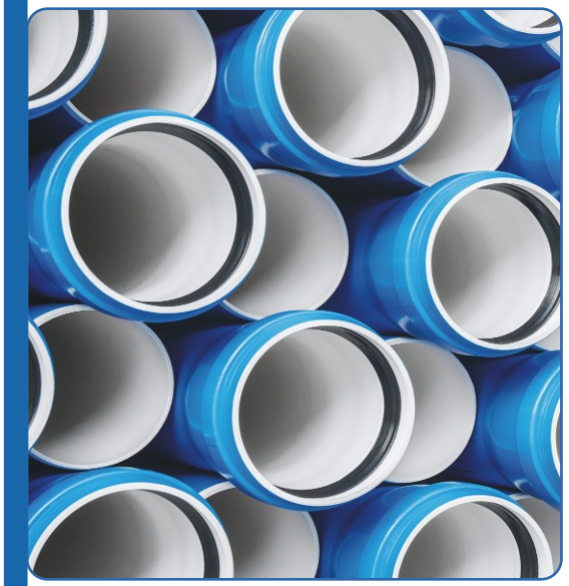



PP-MD

LOW-NOISE SYSTEM WITH HIGH MECHANICAL RESISTANCE

magnoplast

DADEX

Introduction


POLYDUCT is a low-noise soil, waste, and vent (SWV) system designed for non-pressure sanitary sewage and process wastewater applications. It is ideal for handling highly aggressive domestic, municipal, and industrial sewage - particularly waste streams with high hydrogen sulphide concentrations and elevated temperatures. The system is also well-suited for drainage in multi-storey buildings.

Material

Unique recipe of polypropylene (PP-MD) with mineral fillers (pipes and fittings). The pipes are manufactured in the co-extrusion process, which allows for the creation of a molecularly bound solid layer. The fittings are manufactured by injection moulding. The combination of the material composition and wall thickness ensures a very high degree of sound insulation since the noise level is as low as 16 dB.

Each pipe layer meets the applicable requirements:

- Internal layer (white) ensures resistance to high temperatures up to +90°C, +95°C for a short-term flow, high chemical resistance, and reduction of noise level.
- External layer (blue, smooth surface) ensures resistance to external stress, impacts and atmospheric conditions.

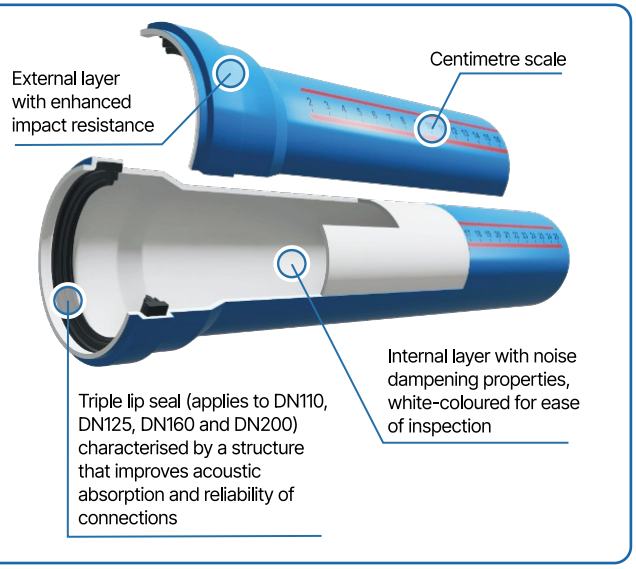

Available Range

The system is available in the diameters of 50, 75, 110, 125, 160 and 200 mm.

Standards Compliance

The system complies with several stringent standards, ensuring quality and reliability across its applications including **EN 14758-1:2012 EN 1451-1:2018-02**


Fields of Application

The system finds extensive use across various sectors and environments, including:

- Single- and multi-family residential housing, spanning low-rise to high-rise structures.
- Specialized establishments such as luxury apartment buildings, nursing homes, offices, doctors' surgeries, hotels, restaurants, hospitals, operating rooms, spas, laboratories, dentists' surgeries, schools, and lecture halls at tertiary education institutions.
- Entertainment venues such as concert and conference halls, theaters, and radio and TV studios.
- Industries including pharmaceutical, food, and catering industries, where the system efficiently drains effluent, including fat-laden effluent (recommended rinsing with water heated to 70°C).
- Storm water drainage within building structures.

Available Pipe / Fittings

A wide range of compatible imported fittings is available

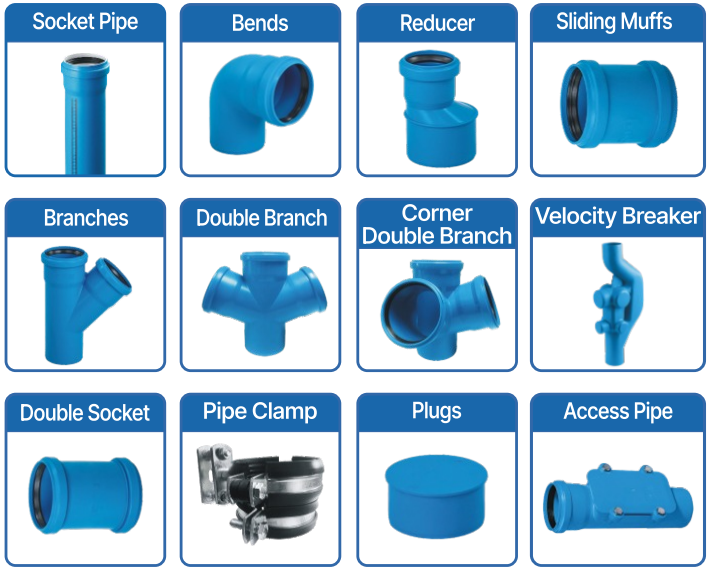

Technical Properties

Material: Unique recipe of polypropylene (PP-MD) + mineral additives for durability.

Noise Reduction: As low as 16 dB at a flow rate of 4 l/s.

Temperature Resistance: Handles temperatures from -20°C to +95°C.

Chemical Resistance: Suitable for pH levels between 2 and 12.

Stiffness Class: ≥ SN8 kN/m² for diameters DN 110 to DN 200.

Socket Tightness: Withstands pressure of up to 4.5 bar.

Triple Lip Seal: Enhanced improved acoustic absorption and connection reliability.

Jointing Method

Lip seals made of a rubber-based compound are used to connect the system components with one another.

Prepare Surfaces:

1. Clean dirt from pipe ends, fittings, and sealing elements.
2. Lubricate the bare pipe end and fitting with a lubricant.
3. Check the position of the elastomer seal.
4. Lubricate the seal in the socket.

Assembly:

1. Insert the pipe into the socket until it stops.
2. Withdraw the pipe from the socket by 10 mm for pipe-to-pipe connections.

Cutting and Preparation:

1. Cut pipes to proper length using a suitable knife for plastics or a manual/mechanical fine-tooth saw.
2. Cut perpendicularly to the pipe axis.
3. Remove all burrs resulting from cutting.
4. Bevel the pipe end at an approximate angle of 15° using a cutting tool or coarse file.

Special Cases:

1. Use an eccentric reduction when connecting horizontal drain pipes with different diameters.
2. Minimize changes in direction for horizontal and vertical sections, opting for wide-radius bends to maintain sewage flow speed.

Fixation:

1. Immediately after installation, fix individual sections of waste stacks with clamping rings to prevent shifting.
2. Maintain 10 mm-long compensating sections.