POLYDUCT

SOIL, WASTE AND VENT LOW-NOISE SYSTEM





PP-MD


LOW-NOISE SYSTEM WITH HIGH MECHANICAL RESISTANCE

magnaplast

DADEX

DADEX

Leader in Roofing and Thermoplastic Piping Systems

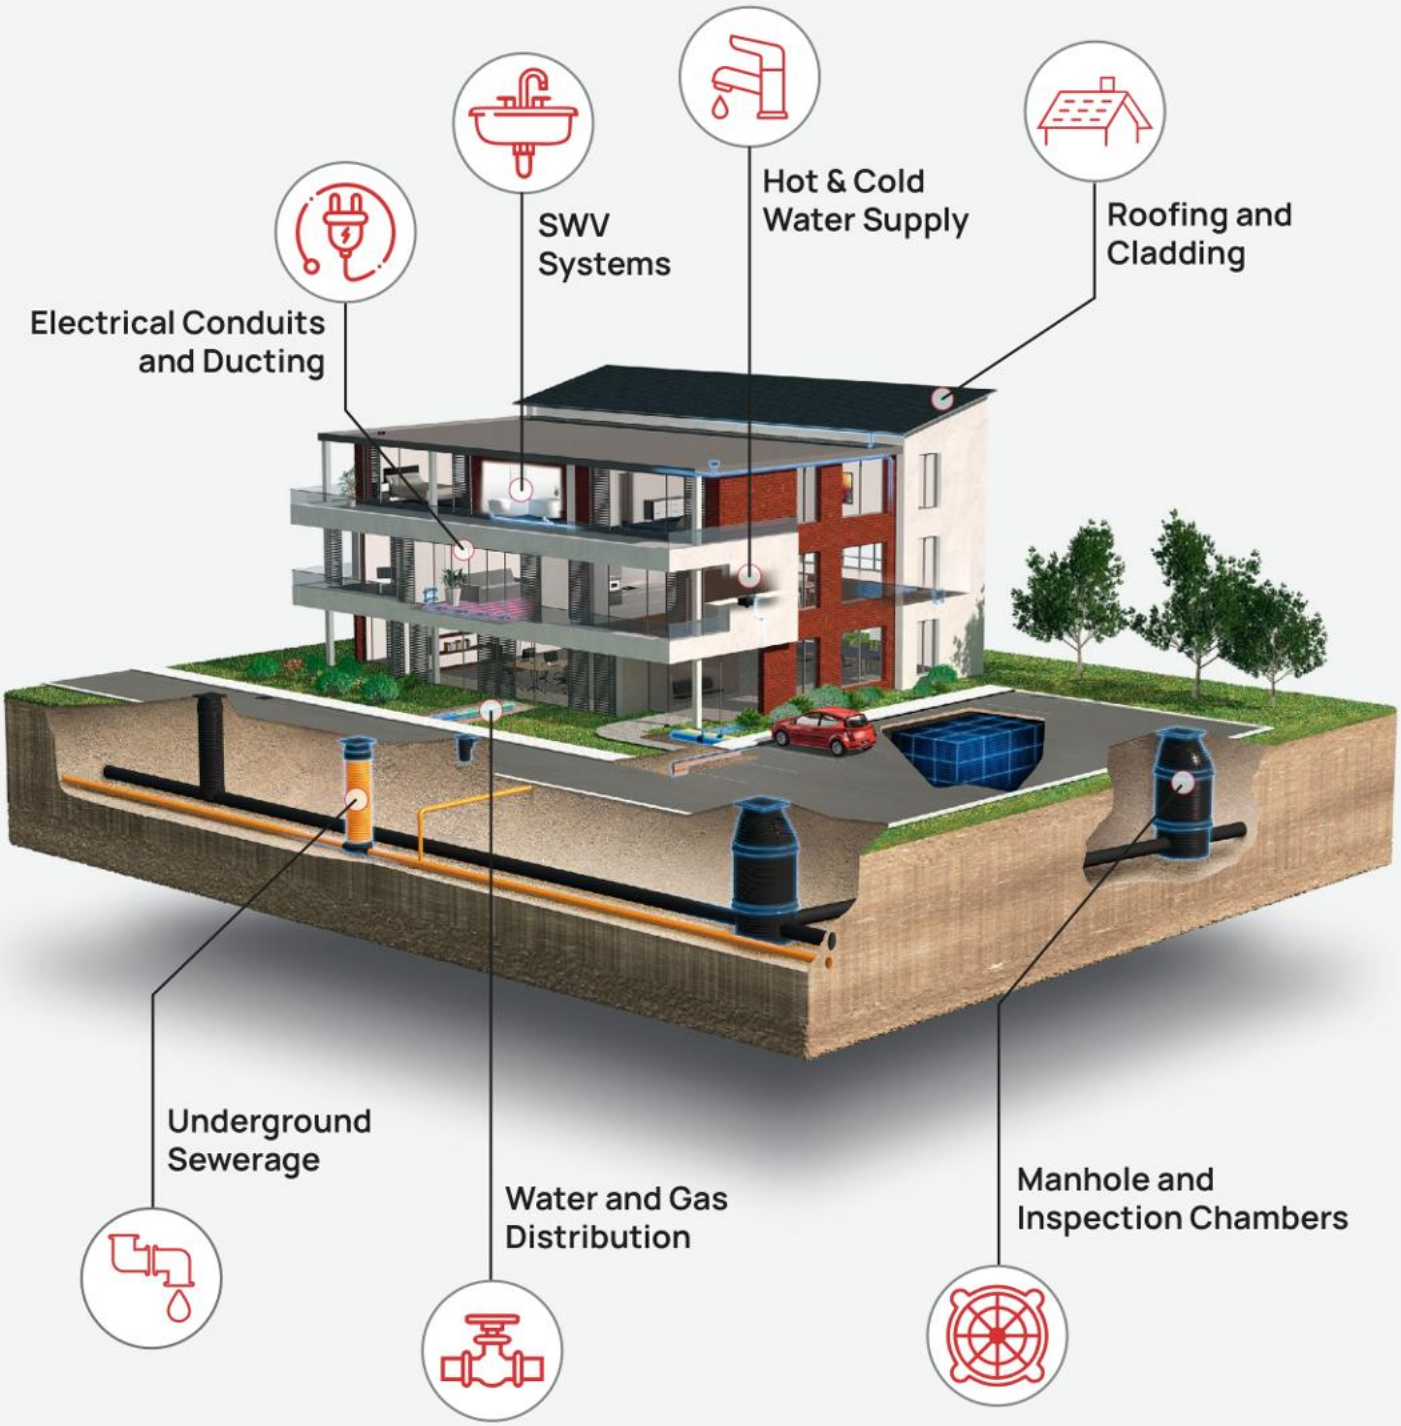

Discover our broad portfolio at

www.dadex.com

About Dadex

Dadex was established as a public limited company in 1959. We started with the manufacturing of FC roofing systems at our facilities in Hyderabad, under the dynamic leadership of our Founder Chairman, Mr. Kassim Dada. Being a forward-looking organization, his son, Mr. Sikander Dada kept up to date with the market, and was instrumental in the diversification with plastic piping systems. Presently we produce various thermoplastic systems such as UPVC, PP-R, PP-RCT, PP, PE.

Headquartered in Karachi, our two manufacturing facilities based in Hyderabad and Sundar Industrial Estate (near Lahore) are equipped with state of the art machinery. Our joint efforts have led Dadex to the ISO 9001, ISO 14001, ISO 45001 and PSQCA certifications.

We aim to set standards in every field we enter. Customer focus, quality and innovation are reflected in every aspect of our business. Offering customized solutions to a cross section of markets for over 65 years, Dadex today is a hallmark of trust and reliability.

We believe that our strength lies in delighting our customers. That is why providing quality products backed by round the clock technical support services are the Dadex promise to all our valued customers.

Extensive Product Range

Water Supply - Infra-Structure

- Aquadex (UPVC Pressure Pipe System)
- T-Flex (PE 100 Pipes & Fittings)

Water Supply - Housing

- Polydex - Premium (PP-RCT Pipe System)
- Polydex (PP-R Pipe System)
- Thermoline (PP-R Pipe System)
- Aquadex (UPVC Pressure Pipe System)

Soil, Waste and Vent (SWV)

- Nikasi - Solvent (UPVC Pipe System)
- Nikasi - Rubber Ring (UPVC Pipe System)
- Polyduct (Low Noise System)

Underground Sewerage and Drainage

- Flow Line (UPVC Underground Sewerage System)
- Inspection Chambers and Manholes

Cable Ducting

- PE Cable Duct Pipes
- Electroduct (UPVC Conduits as per IEC - EN Standard)
- Conduits (UPVC Conduits as per Dadex Standard)

Gas Supply

- T-Flex for gas (PE 80 and PE 100)

Introduction

Dadex Low Noise system is a complete system of pipes and fittings made of mineral-enhanced polypropylene. Each pipe has a double-layered structure consisting of the internal (white) wall and the external (blue) wall which is smooth, resistant to dirt and permanently overprinted with a centimeter scale. Inspection is easy, as the internal surface is smooth and white.

The pipes are manufactured in the co-extrusion process, which allows for the creation of a molecularly bound solid layer. The fittings are manufactured by injection moulding. Thanks to the use of polypropylene and the special wall structure design, this system meets all the requirements imposed on modern sewage systems, namely: safety, resistance to damage and long-lasting durability!

Very good material properties, high resistance to impact, chemical compounds and hot temperature as well as excellent tightness, small weight and easy installation make mineral-enhanced PP products sought-after on the market while their market share, in comparison with traditional solutions based on PP or PVC-U, is on the increase by the day.

The system versions are available with the diameters of 50, 75, 110, 125, 160, and 200mm. The combination of the material composition and wall thickness ensures a very high degree of sound insulation, since the noise level is as low as 16 dB. Lip seals made of a rubber-based compound are used to connect the system components with one another.


As the pipes are lightweight, their installation is easy. Thanks to the smooth inner surface of each pipe, waste water encounters little resistance as it is drained, which even if the conduit gradient is extremely slight prevents deposits from forming. Consistently, no sewage putrefaction occurs in the pipes, which thus remain unclogged.

Material

PP-MD (mineral-enhanced PP products) polypropylene with mineral fillers (pipes and fittings). The pipes are manufactured in the co-extrusion process, which allows for the creation of a molecularly bound solid layer. The fittings are manufactured by injection moulding. The combination of the material composition and wall thickness ensures a very high degree of sound insulation since the noise level is as low as 16 dB.

Each pipe layer meets the applicable requirements:

- internal layer (white) ensures resistance to high temperatures up to +90°C, +95°C for a short-term flow, high chemical resistance, and reduction of noise level.
- external layer (blue, smooth surface) ensures resistance to external stress, impacts and atmospheric conditions.

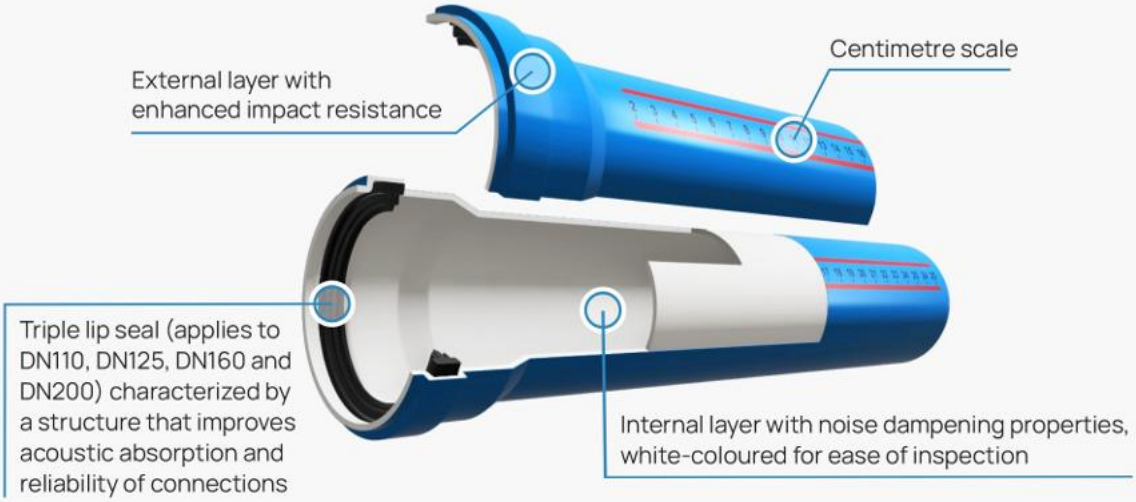

Standards & Specifications

Dadex Low Noise system conforms to EN 1451-1:2018, DIN 4109-10 standards for sound insulation. Noise level as low as 16 dB, proved positive by the tests in the Fraunhofer Institute, Stuttgart, acc. to DIN 4109-10, 3rd class of sound insulation for civil structures intended for people to stay in permanently.

Features & Benefits

Excellent Sound Insulation: Double-layered mineral-enhanced PP pipe wall ensures noise levels as low as 16 dB, validated by Fraunhofer Institute tests, meeting DIN 4109-10 standards for sound insulation.

Chemical Resistance: Withstands aggressive sewage from pH 2 to 12, ensuring long-term, failure-free operation.

High Thermal Resistance: Handles sewage temperatures up to 90°C (permanent flow) and 95°C (short-term flow), offering reliability in diverse conditions.

Mechanical Durability: Maintains high mechanical resistance even at -20°C, enabling installation in winter climates.

Effortless Installation: Innovative centimeter scale and simple connection methods facilitate efficient installation without specialized tools, enhancing project timelines.

Optimized Flow Parameters: Smooth inner pipe surface prevents deposit formation, ensuring superior effluent flow performance.

Versatile Mounting Options: Withstands compression, impact, and various mounting conditions, offering flexibility in installation locations.

Gas and Water Tightness: Prevents steam condensation and gas release, ensuring a secure and odor-free sewage system.

The human nervous system begins to experience fatigue at the minimum noise level of 30 dB. The Dadex Low Noise system, with the noise transmitted by air and solids, operates very quietly. The noise level is as low as that of a ticking clock. The system meets also rigorous requirements of DIN 4109 standard and very rigorous requirements of VDI 4100 standard (max. 20 dB for semi-detached and terraced houses).

The Dadex Low Noise system is a universal solution. It should be used in each type of housing, hotels, schools and industry, since it guarantees silence, comfort and long-lasting durability. Figure 1 shows average noise levels in our environment.

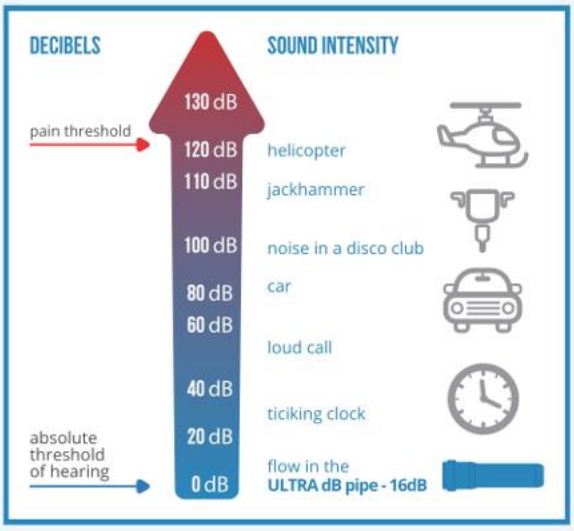


Figure 1 : Examples of noise sources

Available Range

The Dadex Low Noise system versions are available with the diameters of 50, 75, 110, 125, 160 and 200 mm.

Fields of Application

The system finds extensive use across various sectors and environments, including:

- Single- and multi-family residential housing, spanning low-rise to high-rise structures.
- Specialized establishments such as luxury apartment buildings, nursing homes, offices, doctors' surgeries, hotels, restaurants, hospitals, operating rooms, spas, laboratories, dentists' surgeries, schools, and lecture halls at tertiary education institutions.
- Entertainment venues such as concert and conference halls, theatres, and radio and TV studios.
- Industries including pharmaceutical, food, and catering industries, where the system efficiently drains effluent, including fat-laden effluent (recommended rinsing with water heated to 70°C).
- Storm water drainage within building structures.

The Dadex Low-Noise system is intended for the construction of non-pressure soundproof sanitary, storm water and process waste water systems. It is used for draining highly aggressive domestic, municipal and industrial types of sewage (2–12 pH), including ones characterised by a high concentration of hydrogen sulphide and, further, a high temperature.

Due to its benefits, the system has a wide range of applications, for instance in single- and multi-family residential housing, in low and high buildings; it is also used in the systems installed in: luxury apartment buildings, nursing homes, offices, doctors' surgeries, hotels, restaurants, hospitals, operating rooms, spas, laboratories, dentists' surgeries, schools, lecture halls at tertiary education institutions, reading rooms, radio and TV studios, concert and conference halls, theatres, shop floors and in order to drain effluent generated by – including but not limited to – the pharmaceutical, food and catering industries (rinsing the pipes with water heated to 70°C is recommended while draining fat-laden effluent).

The system is also perfectly suitable for draining storm water using systems installed inside the building structure.

The system has the BD designation, which indicates that the pipes and fittings can be used not only inside the building, but also fixed onto the external walls of the building and buried in the ground within the building structure. The installation of the system in the BD application area is also permissible at a temperature above -20°C, which is indicated by the graphic sign (ice crystal symbol) printed on the pipes that meet the applicable requirements of EN ISO 11173:2017-12.

These pipes and fittings can also be used wherever the temperature of sewage does not exceed +90°C (permanent flow) or +95°C (temporary flow).

Jointing Method

Lip seals made of a rubber-based compound are used to connect the system components with one another.

Prepare Surfaces:

1. Clean dirt from pipe ends, fittings, and sealing elements.
2. Lubricate the bare pipe end and fitting with a lubricant.
3. Check the position of the elastomer seal.
4. Lubricate the seal in the socket.

Assembly:

1. Insert the pipe into the socket until it stops.
2. Withdraw the pipe from the socket by 10 mm for pipe-to-pipe connections.

Cutting and Preparation:

1. Cut pipes to proper length using a suitable knife for plastics or a manual/mechanical fine-tooth saw.
2. Cut perpendicularly to the pipe axis.
3. Remove all burrs resulting from cutting.
4. Bevel the pipe end at an approximate angle of 15° using a cutting tool or coarse file.

Special Cases:

1. Use an eccentric reduction when connecting horizontal drain pipes with different diameters.
2. Minimize changes in direction for horizontal and vertical sections, opting for wide-radius bends to maintain sewage flow speed.

Fixation:

1. Immediately after installation, fix individual sections of waste stacks with clamping rings to prevent shifting.
2. Maintain 10 mm-long compensating sections.

Bedding

The bedding layer characteristics depend on the soil type:

- 10 cm bedding layer with the grain size of up to Ø22 mm, for pipes up to DN 200 in the dry soil,
- 15 cm with the same grain size as above in the saturated soil – perform earthworks in a drained excavation,
- 25 cm in rocky soils or with the grain size exceeding Ø40 mm.

The bedding layer is formed with loose soil, a single or multi-fraction material, coarse-grained sand with a small content of fine particles, sandy gravel or crushed aggregate characterized by the grain size from 2 to 40 mm. Ensure that the bedding layer is compacted well (at least 85% of Proctor's value – green area).

Storage

The Dadex Low Noise system pipes are packed in bundles and pelletized or packaged in cardboard boxes. Pallets are stored on a flat horizontal plane kept clear of stones and sharp objects, in original factory packaging, if possible. To secure the pipes against deformation, lay them flat alongside the entire length. Further, lay them in alternating layers for their sockets to rest freely. The Dadex Low Noise system pipes and fittings can be stored outdoors. The tests have shown that even several years of exposure to UV radiation does not have any adverse impact on the characteristics and durability of the pipes. However, their protection against discoloration is recommended for aesthetic reasons. Tarpaulin or black stretch wrap can be used for this purpose.

Pipe diameter	Pipe length	Number of pcs. on a pallet
50	250	480
50	500	320
50	1000	200
50	2000	200
50	3000	200
75	250	320
75	500	160
75	1000	120
75	2000	120
75	3000	120
110	250	80
110	500	80
110	1000	80
110	2000	80
110	3000	80
125	500	60
125	1000	54
125	2000	54
160	500	35
160	1000	35
160	2000	35
160	3000	35

Table 15. Method of storage in collective packaging

Transportation

- The Pipes and fittings must not be transported in bulk together with other building materials that may cause damage to the pipes and fittings.
- Load the pipes for transport carefully, ensure that they are properly supported over the entire length (socket pipes should be arranged in a proper manner).
- Pipes should be transported in horizontal position. Protect pipes against damage caused by frost when unloading them in sub-zero temperatures.
- Do not throw, pull or bend the pipes and fitting when unloading on storage yards and at construction sites.
- The collective packaging is fully suitable for handling with pneumatic lifts and forklift trucks.
- Operate the handling equipment correctly; avoid strong impacts that may cause deformation or damage to the pipes and fittings. This is particularly important at very low temperatures, which can increase brittleness of pipe material.
- Handle the pipes and fitting equally carefully at construction sites. Protect the pipes and fittings (especially seals and internal socket components) against damage and contamination by mud, gravel and foreign materials.

Noise - Sources and Types


To ensure comfortable living conditions, all efforts should be made to eliminate sources of noise and noise nuisance in the environment. Therefore, in recent years there has been an increasing interest in the sources of noise generated inside buildings. The scope of interest includes the design and construction of buildings and the design of systems. The compliance with the acoustic comfort requirements defined for schools, apartments and working environment has become one of the essential conditions determining the design and construction of buildings. Downplaying the „noise issue" in sewage systems is tantamount to disregarding the current regulations on the design requirements and permissible noise levels.

The permissible noise level in rooms is defined by the national acoustic safety standards for buildings. Noise in the apartment is always a nuisance because the apartment should be a peaceful sanctuary. Such places as living rooms, bedrooms, hospital rooms and hotel rooms should be especially protected from noise. The noise-related issues should be borne in mind already at the stage of design and material selection.

One of the factors affecting the generation of noise in rooms is the operation of the internal sewage system.

The main source of acoustic vibrations in the waste stack is the stack itself and the horizontal branch connections, which transmit acoustic vibrations to the stack. Absorbed and reflected sound waves affect the pipes and fittings to experience acoustic resonance. The acoustic resonance, growing dynamically along the building height, in the direction of flowing waste, is transmitted through the fixing system (clamping rings) to the building structure. The dividing structures subjected to acoustic resonance transmit the resonance in the form of a sound wave to the adjacent rooms.


Clamping rings, their type and arrangement, as well as the design and the material formula of the system play the most important role in total reduction of the sewage system noise. Noise is transmitted through the building structure connections. Structure-borne noise is transmitted in all possible directions. Sources of noise in the building's sewage system: water filling the fixtures, water drained from the fixtures, inlets and outlets of horizontal branch connections, water dump in waste stacks, the places where the system changes its direction.

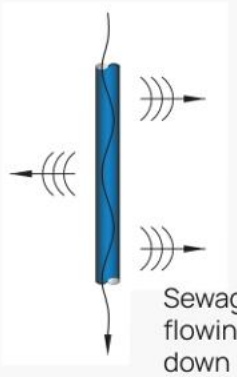

The two different material centres of the Ultra dB double-layer soundproof indoor sewage system hamper the propagation of intra-channel noise by partially absorbing and partially reflecting sound waves inwards, which in consequence significantly reduces noise transmission to the environment.

Types of noise in sewage systems

- **airborne noise –** the source of noise is the air in the drain pipe, especially at the junctions of vertical and horizontal pipe sections; the sewage flowing in the pipes produces a sound and thus transmits vibrations to the surrounding air in the form of pressure or negative pressure waves
- **material noise (structure-borne noise) –** the source of noise is the pipeline vibration transmitted through the mounting components (e.g. clamping rings) to the wall and floor structure and, consequently, to all adjacent rooms - perceived as an annoying acoustic wave that is harmful to health

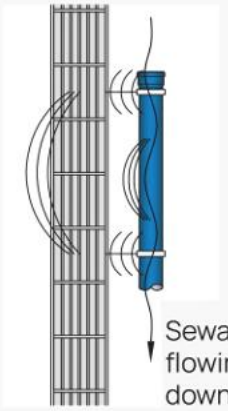

For the noise protection to be effective, the levels of the above types of noise should be reduced. With the application of the Ultra dB soundproof indoor sewage system, the subjective perceived level of noise is considerably reduced as compared to the noise coming from standard drain pipes. Thanks to the use of the double-layer pipe wall, the airborne noise is considerably attenuated and it becomes almost inaudible.

In this case, it is important to design the system fixing the pipes and fittings to the building structure in such a manner as to ensure that the transmission of acoustic resonance to the building structure walls is as small as possible. The transmission of vibrations by solids to the wall adjacent to the system is reduced to a large extent by the fixing system that attenuates noise. Also, the way the pipelines are laid has a significant impact not only on noise generation but also on noise reduction. If possible, the sewage draining direction should be changed in stages, and never abruptly.

Noise Protection

Considering the current development of the construction market and basing on numerous analyses of the issue, one can state that the noise emitted by systems affects the building acoustics to a large extent. Besides, users are raising their expectations, and requirements for noise reduction in buildings will doubtless become more stringent. Specific issues related to building acoustics, including permissible indoor levels of noise emitted by technical equipment installed in buildings, are provided for standard DIN4109 (noise protection in high-rise buildings) and VDI4100 (noise control in apartments - Guidelines). The weighed index for structure-borne noise level for the Dadex low noise system is LSC,A dB(A) = 16 dB, which is confirmed by the results of the acoustics expert opinion prepared by the Fraunhofer Institute.

The noise measurement for the soundproof system made of the Dadex low noise pipes was performed according to the methodology developed by the scientists from the IBP Fraunhofer Institute, Stuttgart, and specified in EN 14366. Pursuant to EN 14366, the test applies to the vertical system in a three-storey building, located next to the wall with basis weight of 220 kg/m². On each storey there is a tee-pipe, plugged on the other two storeys. The vertical section downstream the lowest storey continues further as a horizontal section with two 45° bends and a compensatory section. The floor pipe passage points are tightly sealed. Water, a test medium, is injected into the measuring system on the highest storey, and collected from the horizontal section on the lowest level. Noise is measured on the lowest storey at the following flow rates: 0.5; 1.0; 2.0 and 4.0 l/s.

The most disadvantageous boundary conditions:

- most common maximum flow rate: 4.0 l/s,
- diameter of the most common vertical section: DN 110 mm,
- the place of measurement is the lowest room behind the wall to which the waste stack is fixed.

Results of acoustic tests of Dadex Low Noise system

Measured value	110 x 3.4 system with "BISMAT 1000" clamps			
Flow rate, l/s	0,5	1,0	2,0	4,0
Material noise level L_{sc},A, dB(A)[1/]	< 10	< 10	13	16

[1/] determined according to EN 14366:2006, for the systems with DN 110 pipes

Table 1a. Acoustic characteristics - "BISMAT 1000" clamping rings

The tests have shown that the Ultra dB system displays a very high degree of sound insulation and emits noise at the level of 16 dB (BISMAT 1000 clamping ring - Table 1a) or 20dB (steel clamping ring with an elastomer insert - Table 1b). The human nervous system begins to experience fatigue at the minimum noise level of 30 dB. The Ultra dB system, with the noise transmitted by air and solids, operates very quietly. The noise level is as low as that of a ticking clock. The system meets also rigorous requirements of DIN 4109 standard and very rigorous requirements of VDI 4100 standard (max. 20 dB for semi-detached and terraced houses).

Results of acoustic tests of Dadex Low Noise system

Measured value	system with steel clamping rings with an elastomer insert			
Flow rate, l/s	0,5	1,0	2,0	4,0
Material noise level L_{sc},A, dB(A)[1/]	11	14	16	20


[1/] determined according to EN 14366:2006, for the systems with DN 110 pipes

Table 1b. Acoustic characteristics - steel clamping rings with an elastomer insert

The Dadex Low-Noise system is a universal solution. It should be used in each type of housing, hotels, schools and industry, since it guarantees silence, comfort and long-lasting durability.

PRODUCT DATA SHEET

Material	PP-MD polypropylene with mineral fillers (pipes and fittings)	
Diameters of pipes and fittings	50, 75, 110, 125, 160 and 200 mm	As per EN 1451-1:2018
Wall thickness	DN50=2.0mm; DN75=2.3mm; DN110=3.4mm; DN125=3.9mm; DN160=4.9mm; DN200=6.2mm	
Application area	The "BD" application area i.e. in the systems inside buildings and outside buildings, fixed onto the walls, or in the underground systems buried in the ground or embedded in concrete within the building structure.	As per EN 1451-1:2018
Applications	Low-Mid-High Rise Buildings	Suitable for all heights of buildings with different design criteria for different structures
	Sewerage Design	EN 12056-2, EN 12380
	Draining of roof areas in buildings with rainwater drainage systems up to 45 m in height	Based on Technical Opinion of the Department of Materials Engineering of GIG
Acoustic characteristics (tests carried out in Fraunhofer Institute, Stuttgart)	Standard steel clamping rings with an elastomer insert	11 dB (0.5 l/s); 14 dB (1 l/s); 16 dB (2 l/s); 20 dB (4l/s)
	Special BISMAT 1000 clamping rings	≤ 10 dB (0.5 l/s); ≤ 10 dB (1 l/s);
Colour	Pipes	Internal layer: White External layer: Blue
	Fittings	Blue
Density	1.4 g/cm^3	
Linear expansion Co-efficient	99.5×10-6 mm/mmoC	
Ring stiffness	SN ≥ 4 KN/m^2, series S16, DN110-DN200 › SN8	
Type of connection	Push-in spigot-and-socket pipe joints. Sockets with a factory-installed elastomer seal. DN110, DN125, DN160, DN200 pipes and fittings with factory-installed triple lip seals that improve acoustic absorption and reliability of connections	
Fire resistance class	B2	according to DIN 4102
Chemical resistance	Conveyance and drainage of sewage with pH value ranging from 2 to12 (Dadex technical department should be consulted for specific operational conditions with respect to pressure, temperature and fluid concentration prior to specifying the product.)	
Maximum sewage temperature	90°C - permanent flow; 95°C - temporary flow (upto 15 minutes at one time)	
Minimum installation temperature	- 20°C ❄	
Halogen content	Without halogens (Cl, F, Br, J)	
Special fittings	Steel clamping rings additionally protect pipes and fittings from withdrawing from socket	

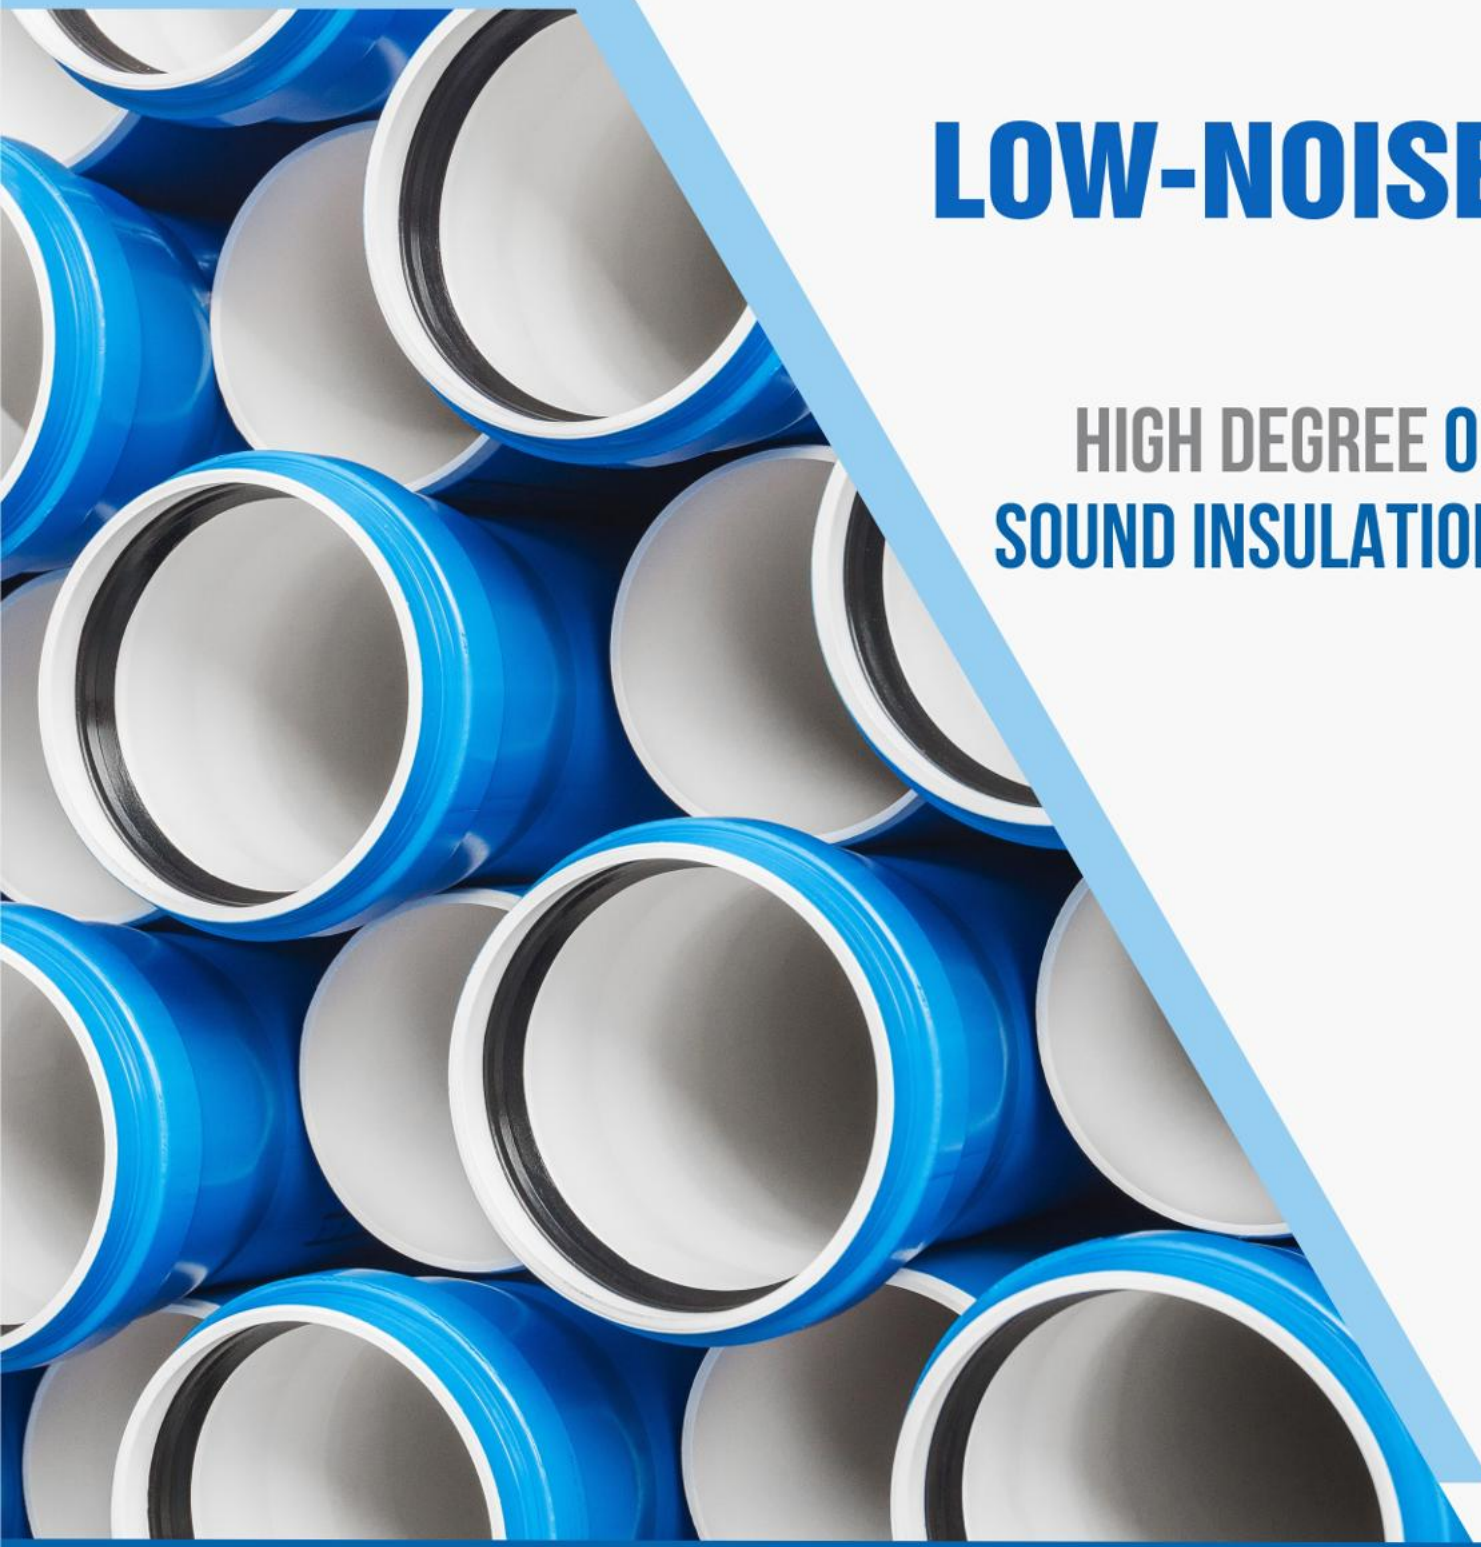


LOW-NOISE

HIGH DEGREE OF SOUND INSULATION

PRODUCT CATALOGUE

SOCKET PIPES




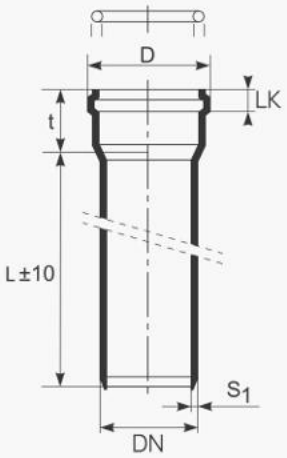

DN [mm]	S1 [mm]	D [mm]	t [mm]	L [mm]	LK [mm]
50	2.0	64	56	250	19
50	2.0	64	56	500	19
50	2.0	64	56	1000	19
50	2.0	64	56	2000	19
50	2.0	64	56	3000	19
75	2.3	89	61	250	22
75	2.3	89	61	500	22
75	2.3	89	61	1000	22
75	2.3	89	61	2000	22
75	2.3	89	61	3000	22
110	3.4	128	72	250	25
110	3.4	128	72	500	25
110	3.4	128	72	1000	25
110	3.4	128	72	2000	25
110	3.4	128	72	3000	25
125	3.9	146	80	500	29
125	3.9	146	80	1000	29
125	3.9	146	80	2000	29
160	4.9	187	95	500	33
160	4.9	187	95	1000	33
160	4.9	187	95	2000	33
160	4.9	187	95	3000	33

BENDS






DN [mm]	deg α	L [mm]	L1 [mm]
50	15°	10	70
50	30°	9	68
50	45°	17	87
50	67°	28	77
50	87°	28	84
75	15°	23	91
75	30°	11	80
75	45°	18	92
75	67°	29	86
75	87°	42	94
110	15°	24	101
110	30°	18	100
110	45°	36	115
110	67°	39	122
110	87°	59	131
125	45°	29	116
125	87°	66	152
160	45°	50	131
160	87°	95	162

REDUCERS






DN1/DN2 [mm]	L1 [mm]	L2 [mm]
75/50	19	73
110/50	37	93
110/75	22	87
125/110	16	99
160/110	34	135
160/125	28	129

BRANCHES






DN1/DN2 [mm]	deg α	L1 [mm]	L2 [mm]	L3 [mm]
50/50	45°	133	116	12
75/50	45°	147	145	1
75/75	45°	183	159	18
110/50	45°	140	158	17
110/75	45°	188	186	1
110/110	45°	224	195	25
125/110	45°	252	91	81
125/125	45°	261	152	29
160/110	45°	275	263	1
160/160	45°	330	294	36
110/50	67°	167	129	8
110/75	67°	169	144	22
110/110	67°	190	160	40
50/50	87°	117	91	28
75/50	87°	119	99	27
75/75	87°	158	115	40
110/50	87°	122	125	28
110/75	87°	166	126	40
110/110	87°	182	133	57
160/160	87°	344	243	83

DOUBLE BRANCH




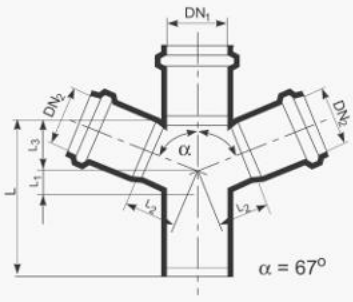

DN1/DN2 [mm]	deg α	L1 [mm]	L2 [mm]	L3 [mm]	L [mm]
110/110	67°	40	85	85	201

CORNER DOUBLE BRANCH






DN1/DN2 [mm]	deg α	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L [mm]
110/110	67°	40	86	86	86	202

SLIDING MUFFS






DN [mm]	L [mm]
50	103
75	109
110	136
125	151.4
160	185

PLUGS






DN [mm]	H [mm]
50	39
75	39
110	46
125	55

DOUBLE SOCKETS






DN [mm]	L [mm]
50	112
75	118
110	136
160	185

VELOCITY BREAKER




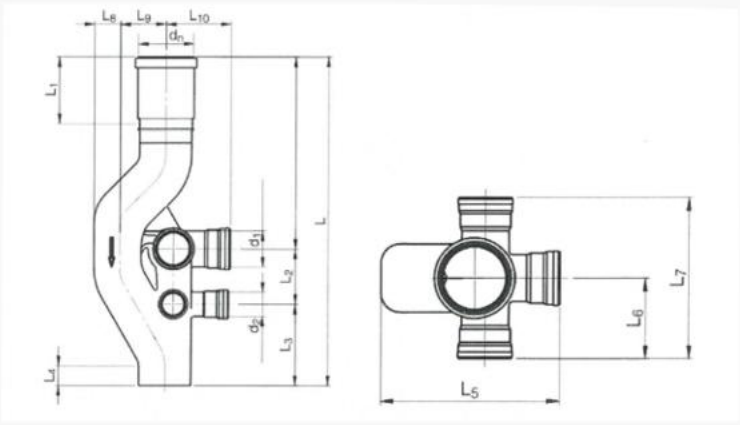

DN [mm]	d1 [mm]	d2 [mm]	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L 5 [mm]	L6 [mm]	L7 [mm]	L8 [mm]	L9 [mm]	L10 [mm]
110	110	75	965	256	170	240	60	345	160	315	55	130	160
160	110	75	1010	256	170	240	60	405	180	360	80	140	185

ACCESS PIPE






DN [mm]	D [mm]	L [mm]
110	230	308
125	250	313
160	280	380

BISMAT 1000 SOUNDPROOF PIPE CLAMP





DN [mm]
75
110
160

DADEX Eternit Limited

Dadex House : 34-A/1, P.E.C.H.S. Block-6, Shahrah-e-Faisal, Karachi, Pakistan.
Tel. # (92-21) 111 000 789, E-mail : marketing@dadex.com.pk
Web : www.dadex.com www.facebook.com/dadexpk/

Dadex Sales Offices

- **Karachi:** UAN : (92-21) 111 000 789
  E-mail: sales@dadex.com.pk
- **Lahore:** (92-42) 3718 0152
  E-mail: lahore@dadex.com.pk
- **Faisalabad:** (92-41) 8861981, 8787944.
  E-mail: faisalabad@dadex.com.pk
- **Multan:** (92-61) 4545259.
  E-mail: multan@dadex.com.pk
- **Islamabad:** (92-51) 4861034-5
  E-mail: islamabad@dadex.com.pk

Dadex Authorised Distributor for Polyduct

Burhani Traders
C786, Block C, Sector C, Main PWD Road, Islamabad.
Tel: 0303-8203417 | E-mail: juzer@burhanitraders.com

For Technical information and assistance, please contact Dadex Techno Commercial Department at sales@dadex.com.pk

Note: All information contained in this literature is provided in good faith. The user should, however, verify that the product is fit for the intended purpose and application. Please ensure compliance with all health and safety requirements. While continuing its program of continuous development, the Seller reserves the right to modify or extend any published information without prior notification. No responsibility can be accepted for errors, omissions, or incorrect assumptions.

Seller's Responsibility: The responsibility of the seller ceases once the goods are delivered to the buyer's representative at our factory, where delivery is taken in person. In other cases, the responsibility of the seller shall cease once the goods are delivered to the buyer's or carrier's authorized representative(s). No claims of any type—including in-transit loss, damage, pilferage, or short-delivery—will be entertained by the seller, and the buyer agrees to hold the seller harmless in this regard. Additionally, the seller shall not be responsible for any consequential damages, including but not limited to economic loss of any kind whatsoever, upon the products being delivered to the buyer as per the terms of this Clause. Any claim or responsibility as stated herein will not be entertained by the seller, and such action shall not be the cause of a dispute by the buyer.

Jan-2026