
Jointing


The ring seal has been successfully employed as the principal method of jointing large diameter UPVC pipes and fittings. This particular technique has proved extremely reliable as the joint can accommodate thermal movement that will occur as a result of temperature variations. An expansion gap of between 5-10mm should be allowed within each ring seal socket as each full length of pipe is installed and fixed using socket and barrel pipe clips.

While the most popular method of jointing larger size UPVC pipes and fittings is by rubber ring seal, with small diameter waste pipework the principal choice is usually solvent weld. Where this technique is used expansion couplings must be introduced where pipe lengths exceed 1.8 metres or between fixed points.

NIKASI SWV SYSTEM (Rubber Ring System)

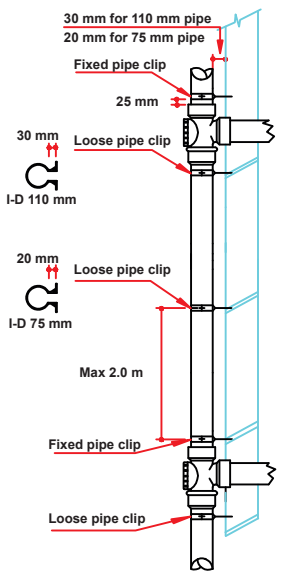

NIKASI SWV SYSTEM (Solvent System)

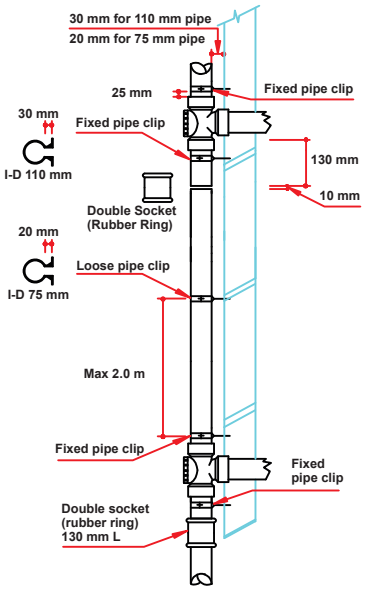

The given table shows recommended distances in meter for support centers that are necessary for a proper pipe system installation.

Nominal OD (mm)	Distance between Clamps (m)	
	Horizontal Pipes	Vertical Pipes
40	0.40	1.2
50	0.50	1.5
75	0.75	1.8
110	1.10	1.8
160	1.60	1.8
200	1.60	1.8

The values shown are for general installations only. Attention is drawn to special requirements that may be needed in more demanding applications

About Dadex

Dadex was established as a public limited company in 1959. We started with the manufacturing of FC roofing systems at our facility in Hyderabad, under the dynamic leadership of our Founder Chairman, Mr. Kassim Dada. Being a forward-looking organization, his son, Mr. Sikander Dada kept up to date with the market, and was instrumental in the diversification with plastic piping systems. Presently we produce various thermoplastic systems such as u-PVC, PP-R, PP-RCT, PP, PE.

Headquartered in Karachi, our two manufacturing facilities based in Hyderabad and Sundar Industrial Estate (near Lahore) are equipped with state of the art machinery. Our joint efforts have led Dadex to the ISO 9001, ISO 14001, ISO 45001 and PSQCA certifications.

We aim to set standards in every field we enter. Customer focus, quality and innovation are reflected in every aspect of our business. Offering customized solutions to a cross section of markets for over 66 years, Dadex today is a hallmark of trust and reliability.

We believe that our strength lies in delighting our customers. That is why providing quality products backed by round the clock technical support services are the Dadex promise to all our valued customers.

DADEX Eternit Limited

Dadex House, 34-A/1, P.E.C.H.S. Block-6, Shahrah-e-Faisal, Karachi.
UAN: (92-21) 111 000 789, Email: marketing@dadex.com.pk

Dadex Authorised Distributor for Nikasi


Galaxy Pipe Store
Shop # 6E, Building No. 7E, 27th Com. Street, Tauheed Com. Area, Phase V, DHA. Karachi.
Tel: 0300-2929567 | E-mail: akhtarnawaz38@gmail.com


TÜV AUSTRIA ISO 9001 · SGS ISO 14001 · SGS ISO 45001 · Pakistan Standards

Feb. 2026

Nikasi

SOIL, WASTE & VENT (SWV)

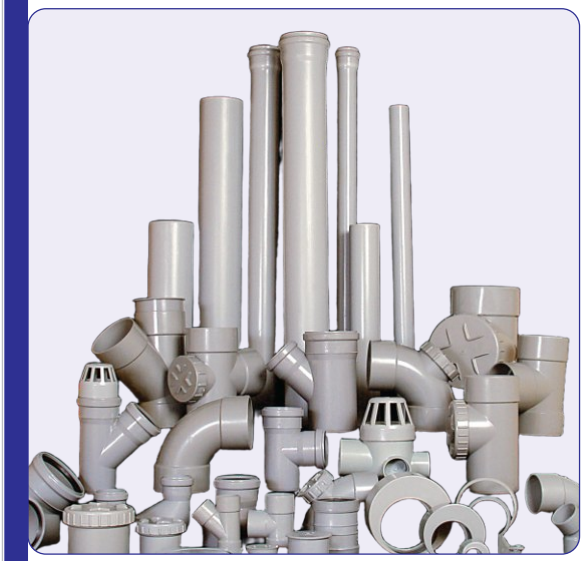

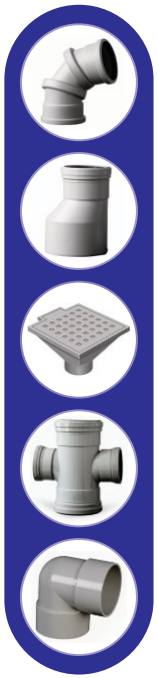

UPVC

DADEX

Introduction

Nikasi is a complete soil, waste and vent (SWV) sanitary pipe system made of unplasticised Polyvinyl Chloride (PVC-U) compound. Due to its excellent physical and chemical characteristics and ease of installation, Nikasi SWV system is now most popular and reliable SWV sanitary pipe system for inside buildings installation.

Material

Unplasticised Polyvinyl Chloride (PVC-U).
Nikasi pipes and fittings are grey in colour.

Standards & Specifications

- Nikasi pipes conform to ISO 3633/EN 1329 & PS 3214
- Nikasi fittings conform to ISO 3633:2002(E)/EN 1329 & PS 3214

Features & Benefits

- Low flow loss due to smooth inside surface.
- Non corrosive and chemical resistance.
- Light weight, easy and fast installation.
- Self-Extinguishing.
- Non conductivity of electricity.

Available Range

Pipes: Nikasi pipes are available in nominal outside diameters of 40mm, 50mm, 75mm, 110mm, 160mm and 200mm in standard lengths of 3m and 4m.

Socketed end: Pipe with one end socketed for rubber ring.
Plain end: Pipe with both ends plain.

Fittings: Complete range of imported Nikasi fittings is available. Special fittings could be made available on demand.

Handling & Storage

- Reasonable care should be exercised in handling of Nikasi pipes and fittings particularly in very hot or cold conditions. Some useful tips are as follows:
- Pipes should be stacked on a flat base or level ground or alternatively on timber bearers at spacing not greater than 1.5m while the width of the bottom layer of the stack should not exceed 3m.
- Pipe should be stacked not more than 1m high.
- Pipe stacks should contain one diameter size only. If this is not possible then the largest diameter should be stacked at the bottom. Small pipes may be nested inside larger pipes. If pipes are transported one inside the other, the inner pipes should always be removed first.
- When stored in the open for long periods or exposed to strong sunlight the stack should be covered by an opaque covering to prevent it from heat and strong sunlight.
- Fittings should be stored under cover until required.
- Solvent cement solution and cleaning fluid should be stored in a cool dry place, away from direct sunlight and any heat source.

NIKASI FITTINGS - SOLVENT CEMENT


Tee/ Access Tee (MF / FF)



Reducing Tee / Access Reducing Tee (MF / FF)



Hopper and Grid



Double Tee (MF / FF)




Reducing Double Tee (MF / FF)



Knuckle Elbow 90°



15° / 30° Bend (MF / FF)



45° Bend / Access Bend (MF / FF)



88° Bend / Access Bend (MF / FF)



Socket / Double Socket



Single 'Y' (MF/FF)



Access 'Y' (MF / FF)



Reducing 'Y (MF / FF)



Double 'Y' (MF / FF)



End Cap / Access Cap



P - Trap Body



MultiFloor Trap



Pipe Clip / Omega Clip



Access Pipe (MF / FF)



Reducer



Eccentric Reducer



NIKASI FITTINGS - RUBBER RING

Tee (FF / MF)



Access Tee (FF / MF)



Reducing Tee (FF / MF)



Double Tee (FF / MF)



Reducing Double Tee (FF / MF)



Reducing Access Tee (FF / MF)



Adjustable Bend



Bend 15° (FF / MF)



Bend 30° (FF / MF)



Bend 45° (FF / MF)



Bend 88° (FF / MF)



Access Bend 88° (FF / MF)



Vent Cowl



Socket / Double Socket



Reducer



Single 'Y' (FF / MF)



Reducing 'Y' (FF / MF)



Access 'Y'



Access Pipe (FF / MF)



Double 'Y' (FF / MF)

