TECHNICAL SPECIFICATION SHEET

05/03/2026	30001517	Aps2509	Page 1 / 4

ThermalTrue®

Project
Clean AHU

Ref.	Model	Flow	Qty
AHU-X4-100-H3-V	D50-030x030	4,410 CMH	1

01	Access Door	02	Mixing Box	03	Panel & Bag Filter	04	Evaporator
05	Access Door	06	Electric Heater	07	Inlet/Outlet Opening	08	Inlet/Outlet Opening
09	Access Door	10	Plenum Fan	11	Inlet/Outlet Opening		

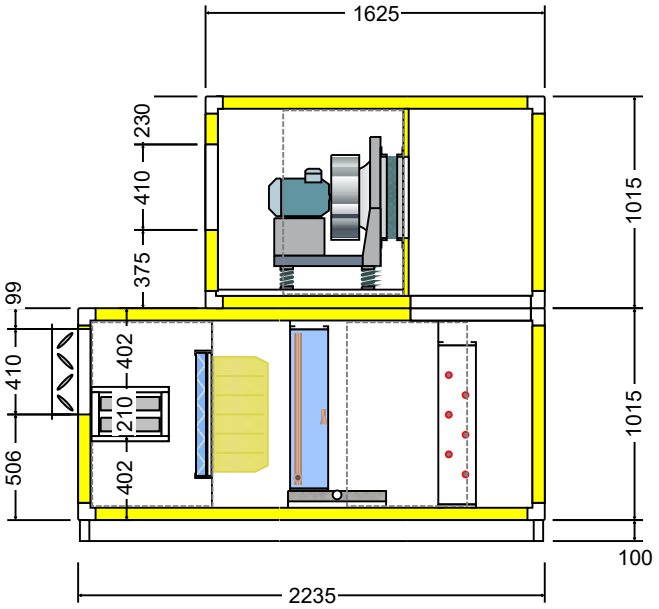

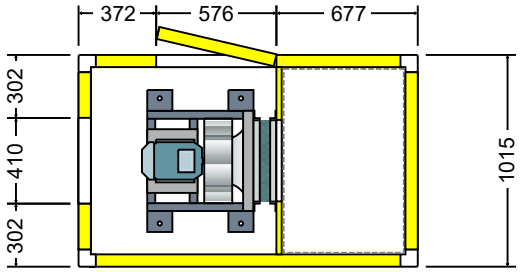

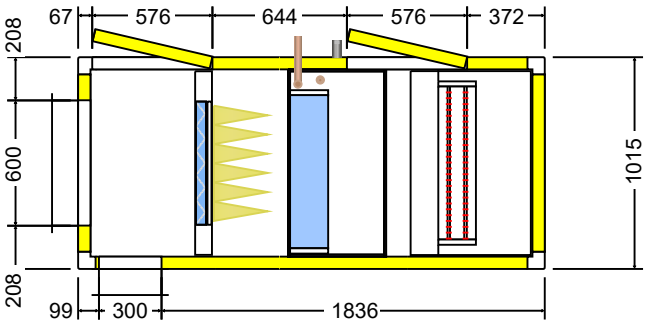

Section No	Height mm	Width mm	Length mm	Weight [kg]
01	1115	1015	2235	339
02	1015	1015	1625	281

PANELS / FRAME

Insulation	External Sheet	Internal Sheet	Thickness
Polyurethane 40kg/m3	Pre-Coated Steel Sheet 0.55mm	Galvanised Steel Sheet 0.55mm	50mm
Frame Work	**Thermal Break**	**Corner**	**Base**
Mill finished Alu. Profile	Full Non-Thermal Bridge	Nylon Corner Piece	C-100

TECHNICAL SPECIFICATION SHEET

05/03/2026	30001517	Aps2509	Page 2 / 4

ThermalTrue®

Project	Ref.	Model	Flow	Qty
Clean AHU	AHU-X4-100-H3-V	D50-030x030	4,410 CMH	1

01 ACCESS DOOR

Type	Dimensions	Access	Window	Bulkhead	Lock
Hinged Door	881H x 576W mm	Open Outward	No	No	No

02 MIXING BOX

FRESH AIR DAMPER

Model	Dimensions
PS100 Oppose Blade Damper	210 x 300 mm

Flow	Air Vel.	Pressure Drop	Torque
1,103 CMH	4.88 m/s	14 Pa	0.5 N.m

RETURN AIR DAMPER

Model	Dimensions
PS100 Oppose Blade Damper	410 x 600 mm

Flow	Air Vel.	Pressure Drop	Torque
3,308 CMH	3.75 m/s	8 Pa	1.8 N.m

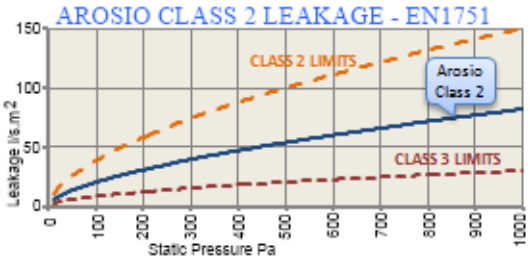

Flex. Connector	Inlet Louvre	Wire Gauge	Actuator
No	No	No	No

03 FILTERS

PANEL FILTER

Media	Depth	Class
Synthetic Fibre Washable	50 mm	G4 [MERV6]

Flow	Full Size Qty	Half Size Qty	Frame
4,410 CMH	1	0	Standard

Clean APD	Final APD	Average APD	Withdrawal
163 Pa	300 Pa	232 Pa	Side Release

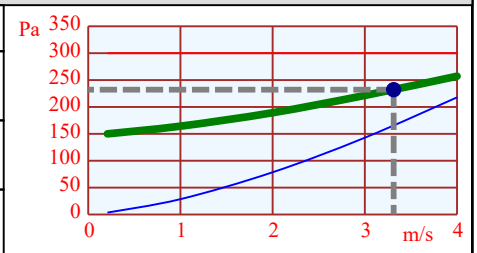

BAG FILTER

Media	Depth	Class
Rigid Fiber Glass	292 mm	F8 [MERV14]

Flow	Full Size Qty	Half Size Qty	Frame
4,410 CMH	1	0	Standard

Clean APD	Final APD	Average APD	Withdrawal
148 Pa	250 Pa	199 Pa	Side Release

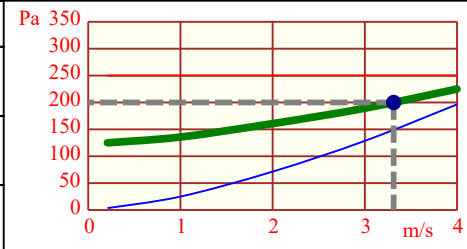

Spare Filter	Magnehelic Gage	Pressure Switch	Pressure Transmitter	Pressure Switch/Gage	Pressure Manometer
No	No	No	No	No	No

04 REFRIGERANT COOLING COILS

Model	Qty	Circuits
3/8"DX 762FH x 733FL x 6R x 10FPI x 15NC	1	1

Air Flow	Air Vel.	APD	Handedness
4,410 CMH	2.2 m/s	108 Pa	Left Hand

Total Load	EADB	EAWB	RH_In
104,569 BTU	23.89 °C	17.65 °C	54.34 %

Sensible Load	LADB	LAWB	RH_Out
69,387 BTU	10.3 °C	9.86 °C	94.81 %

Refrigerant	Flow Rate	Liquid	Superheat
R410A	867 kg/hr	54.44°C	8 K

Suction Pipe	Liquid Pipe	Drain Pan	Pan Depth
1-3/8" Copper	3/4" Copper	SS 304	450 mm

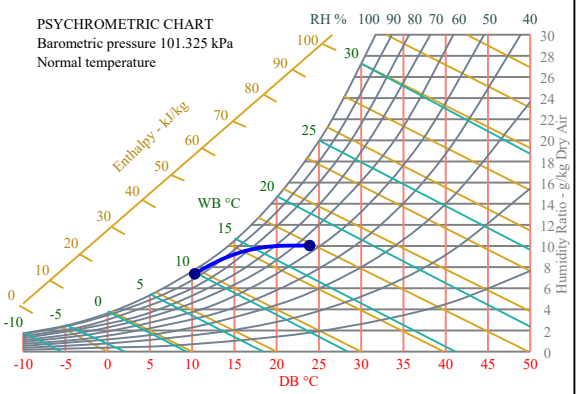

Fins	Tubes	Frames	Anti-Freeze	Expansion Valves	Intermediate Tray
Aluminium	3/8" Copper	Galvanized	No	No	No

TECHNICAL SPECIFICATION SHEET

05/03/2026	30001517	Aps2509	Page 3 / 4

ThermalTrue®

Project	Ref.	Model	Flow	Qty
Clean AHU	AHU-X4-100-H3-V	D50-030x030	4,410 CMH	1

05 ACCESS DOOR

Type	Dimensions	Access	Window	Bulkhead	Lock
Hinged Door	881H x 576W mm	Open Outward	No	No	No

06 ELECTRIC HEATER

Dimension	Steps	APD
762H x 733W x 180D mm	2	20 Pa

Air Flow	Total Load	Air Velocity
4,410 CMH	12 kW	2.2 m/s
EADB	**EAWB**	**RH_In**
10 °C	9.75 °C	97.01 %
LADB	**LAWB**	**RH_Out**
18.01 °C	13.12 °C	57.57 %
Electrical Char.	**Frame**	**Fins Material**
50Hz 380-415V	G.I.	Stainless Steel

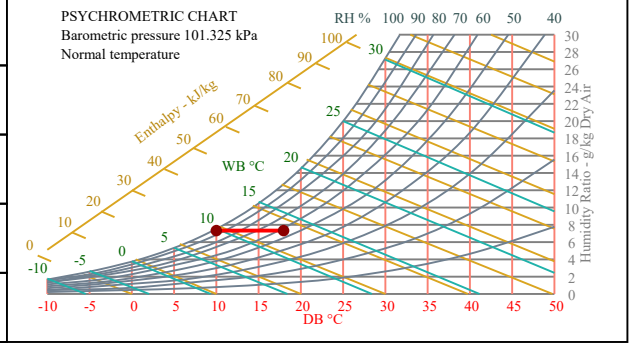

07 INLET/OUTLET OPENING

Dimensions	Flow	Air Vel.	Pressure Drop	Torque
576 x 881 mm	4,410 CMH	0 m/s	-	-
Model	**Flexible Connector**	**Inlet Louvre**	**Wire Gauze**	**Actuator**
Inlet/Outlet Opening	No	No	No	No

08 INLET/OUTLET OPENING

Dimensions	Flow	Air Vel.	Pressure Drop	Torque
410 x 410 mm	4,410 CMH	7.32 m/s	-	-
Model	**Flexible Connector**	**Inlet Louvre**	**Wire Gauze**	**Actuator**
Inlet/Outlet Opening	No	No	No	No

09 ACCESS DOOR

Type	Dimensions	Access	Window	Bulkhead	Lock
Hinged Door	881H x 576W mm	Open Outward	No	No	No

10 PLENUM FAN

Fan Make	Fan Model	Wheel	Fan RPM	Fan Eff.
Ylida	SYWA355R	BC	3160	79 %

Air Flow	Outlet Vel.	Ext. Static	Total Pressure	Shaft Power
4,410 CMH	-	750 Pa	1398 Pa	2.17 kW
Motor Make	**Poles**	**Motor kW [hp]**	**Eff.**	**Electrical Char.**
MFG STD	2	3 [4]	IE1	380-415V/3Ø/50Hz
Motor Frame	**Fan Drive**	**Fan Shaft**	**Motor Drive**	**Motor Shaft**
100L	Direct	Ø 28	[54 Hz]	Ø 28
Isolator	**AV01**	**AV02**	**AV03**	**AV04**
Spring	22	22	30	30

In-Duct Sound Power Level (dB)

dB(A)	63 Hz	125 Hz	250 Hz	500 Hz	1K Hz	2K Hz	4K Hz	8K Hz
91.3	66	64.3	86.6	82.2	84.8	83.4	82.7	73.7

Accessories

TECHNICAL SPECIFICATION SHEET

05/03/2026	30001517	Aps2509	Page 4 / 4

Project
Clean AHU

Ref.	Model	Flow	Qty
AHU-X4-100-H3-V	D50-030x030	4,410 CMH	1

11 INLET/OUTLET OPENING

Dimensions	Flow	Air Vel.	Pressure Drop	Torque
576 x 881 mm	4,410 CMH	0 m/s	-	-
Model	**Flexible Connector**	**Inlet Louvre**	**Wire Gauze**	**Actuator**
Inlet/Outlet Opening	No	No	No	No