



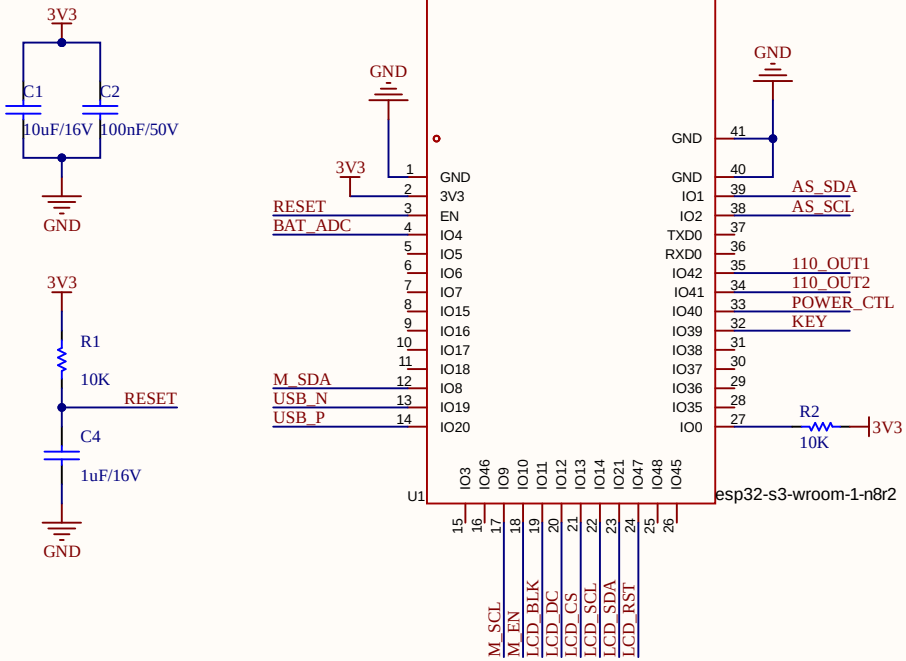





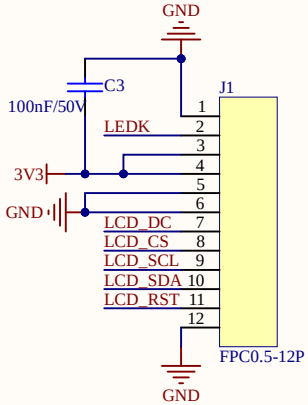

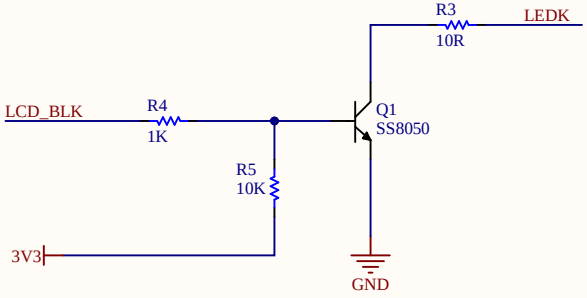






Title		
Size A4	Number	Revision
Date: 7/20/2026		Sheet of
File: D:\workspace\..\MCU.SchDoc		Drawn By:

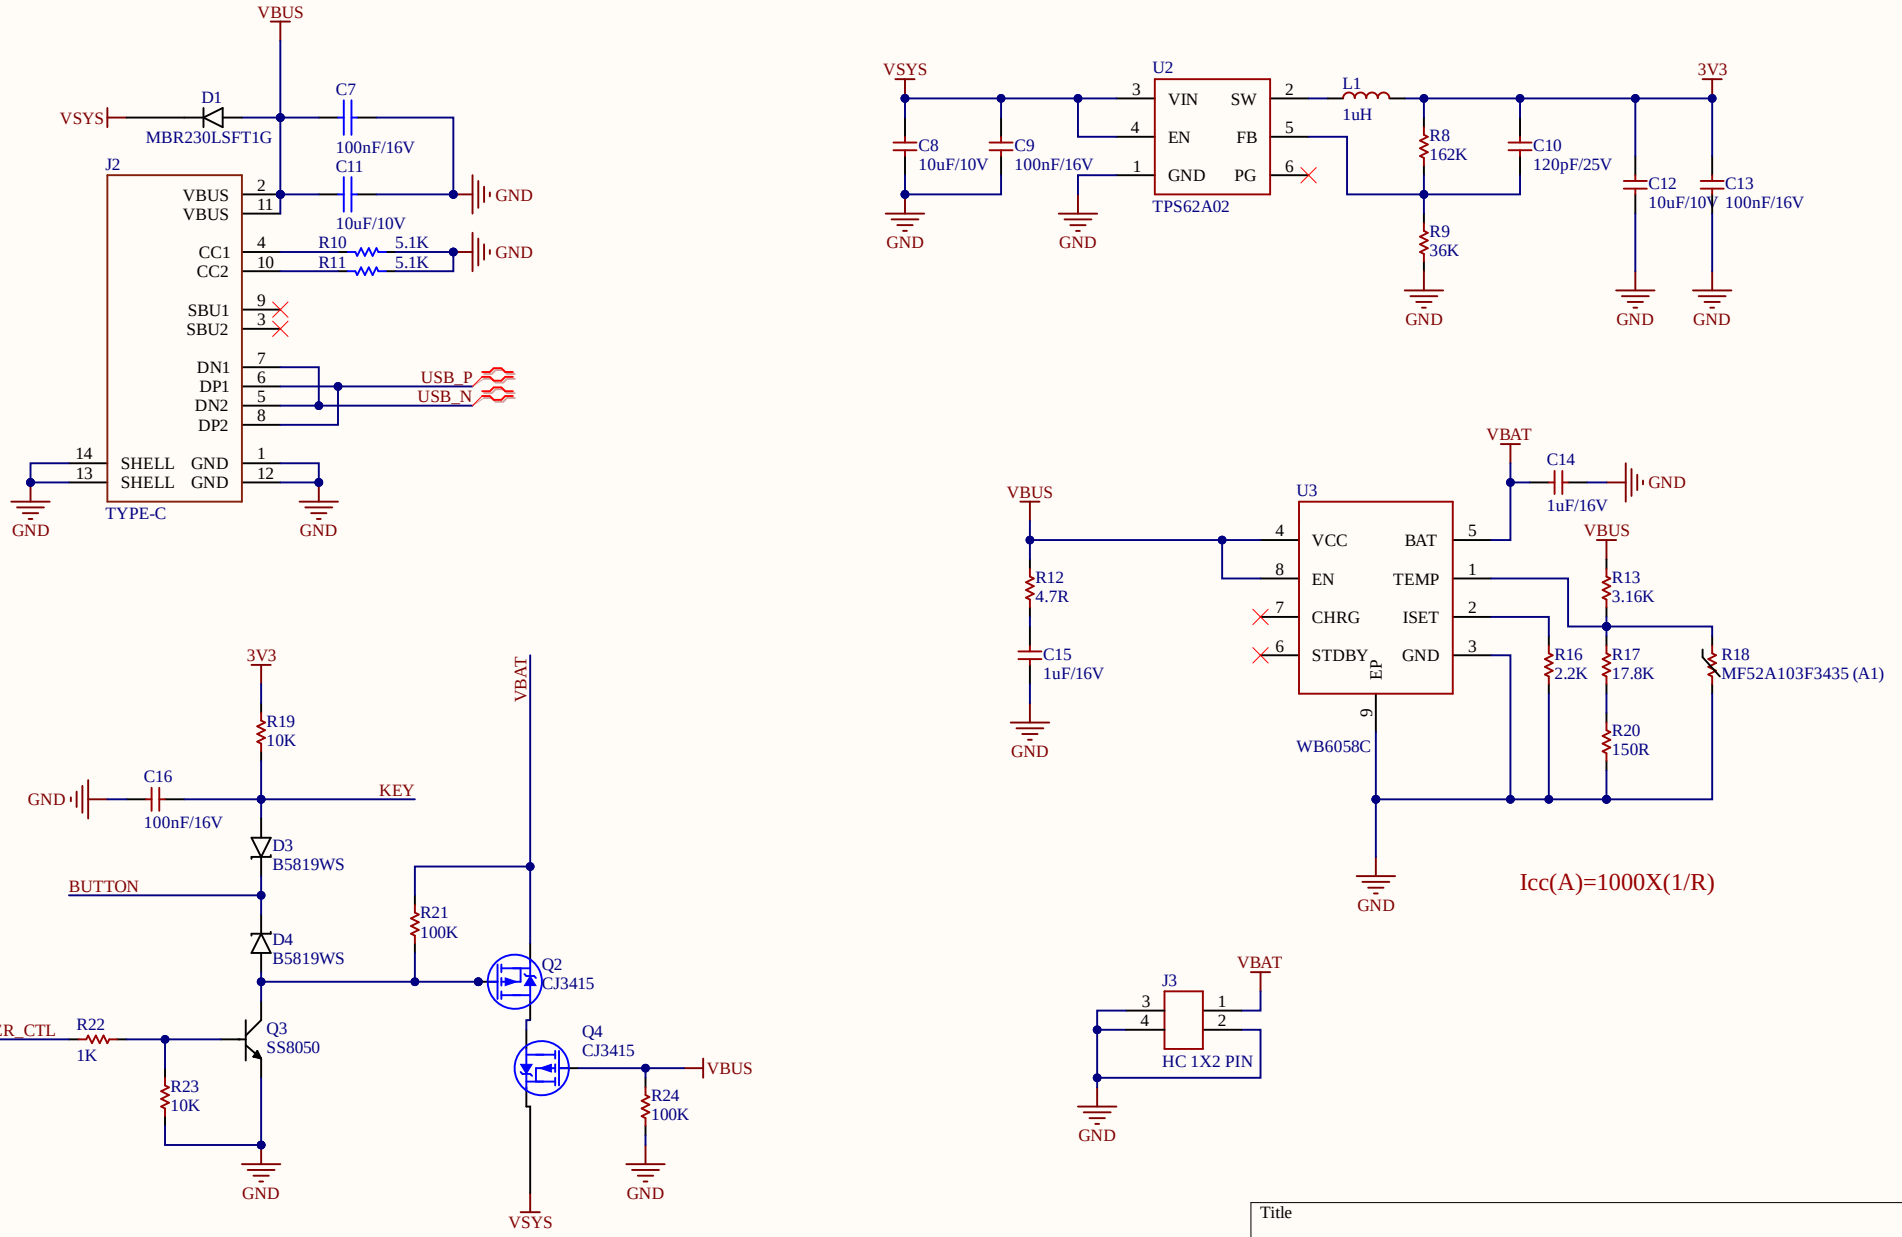


Title		
Size A4	Number	Revision
Date: 7/20/2026		Sheet of
File: D:\workspace\..\POWER.SchDoc		Drawn By:

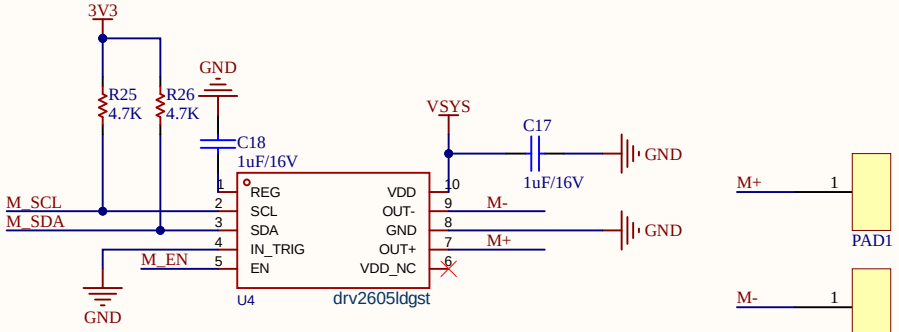



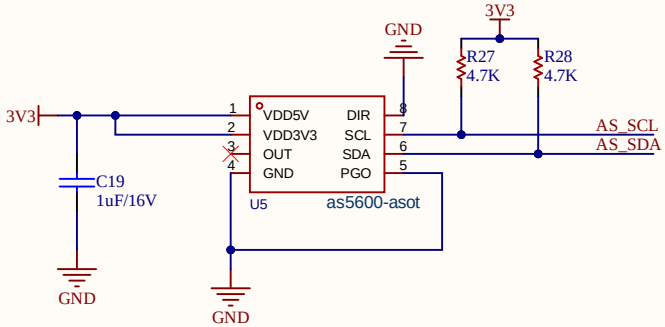

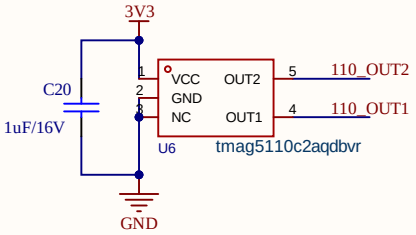

Title		
Size: A4	Number	Revision
Date: 7/20/2026		Sheet of
File: D:\workspace\..\BSP.SchDoc		Drawn By:

Comment	Description	Designator	Footprint	LibRef	Quantity
10uF/16V		C1	0603C	CAP	1
100nF/50V		C2, C3	0402C	CAP	2
1uF/16V		C4, C14, C15, C17, C18, C19, C20	0402C	CAP	7
100nF/16V		C5, C6, C7, C9, C13, C16	0402C	CAP	6
10uF/10V		C8, C11, C12	0603C	CAP	3
120pF/25V		C10	0402C	CAP	1
MBR230LSFT1G	二极管	D1	SOD-123FL_L2.7-W1.8-LS3.8-RD	DIODE_1	1
B5819WS	肖特基二极管	D3, D4	SOD-323	Diode Schottky_1	2
FPC0.5-12P	贴片	J1	FPC0.5-12P	FPC0.5-12P	1
TYPE-C	16Pin Type-C	J2	USB-C-SMD_TYPE-C-6PIN-2MD-073	TYPE-C 16PIN	1
HC 1X2 PIN		J3	CONN-SMD_2P-P1.25-HC-1.25-2PWT	HC 1X2 WT	1
1uH	电感	L1	1008L	IND	1
焊盘		PAD1, PAD2	pad-40*40	PAD	2
SS8050	NPN三极管	Q1, Q3	SOT-23	NPN	2
CJ3415	P沟道场效应管	Q2, Q4	SOT-23-3	CJ3415	2
10K	电阻	R1, R2, R5, R19, R23	0402R	RES	5
10R	电阻	R3	0402R	RES	1
1K	电阻	R4, R22	0402R	RES	2
100K	电阻	R6, R7, R21, R24	0402R	RES	4
162K	电阻	R8	0402R	RES	1
36K	电阻	R9	0402R	RES	1
5.1K	电阻	R10, R11	0402R	RES	2
4.7R	电阻	R12	0402R	RES	1
3.16K	电阻	R13	0402R	RES	1
2.2K	电阻	R16	0402R	RES	1
17.8K	电阻	R17	0402R	RES	1
MF52A103F3435 (A1)	温度电阻	R18	RES-TH_L2.5-W2.5-P1.70-D0.3	NTC	1
150R	电阻	R20	0402R	RES	1
4.7K	电阻	R25, R26, R27, R28	0402R	RES	4
b5b35111e	电路结构:单刀单掷;按钮形状:矩形按钮;作用力:1.8N;安装方式:立贴;开关长度:4.5mm;开关宽度:1.9mm;开关高度:3.5mm;带支架:带支架;触点电流:50mA;额定电压:12V;带灯:无;工作寿命:5万次;	SW1	SW-SMD_B5B35111E	b5b35111e	1
esp32-s3-wroom-1-n8r2	核心芯片:ESP32-S3芯片;频率:2.4GHz;天线形式:板载PCB天线;发射功率:20.5dBm;接收灵敏度:-98.2dBm;	U1	WIRELM-SMD_ESP32-S3-WROOM-1	esp32-s3-wroom-1-n8r2	1
TPS62A02	TPS62A02 采用 SOT563 和	U2	SOT-563_L1.6-W1.2-P0.50-LS1.6-TL	TPS62A02	1
WB6058C		U3	TDFN-8_L3.0-W3.0-P0.65-BL-EP2.3	WB6058C	1
drv2605ldgst	DRV2605L 具有 2V 工作电压、波形库和自动谐振跟踪功能的 ERM/LRA 触觉驱动器	U4	VSSOP-10_L3.0-W3.0-P0.50-LS4.9-BL	drv2605ldgst	1
as5600-asot	旋转角度范围:0°~360°;	U5	SOIC-8_L5.0-W4.0-P1.27-LS6.0-BL	as5600-asot	1
tmag5110c2aqdbvr	TMAG5110 高灵敏度、2D、双通道、霍尔效应锁存器	U6	SOT-23-5_L2.9-W1.6-P0.95-LS2.8-BR	tmag5110c2aqdbvr	1