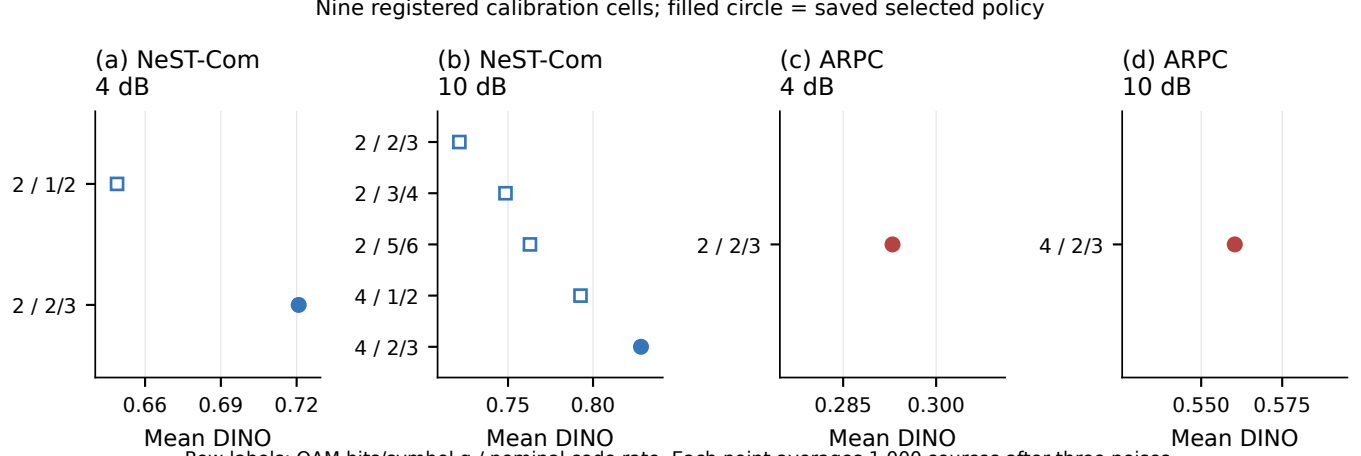
Nine registered calibration cells; filled circle = saved selected policy
(a) NeST-Com
4 dB
2 / 1/2
2 / 2/3
0.66
0.69
0.72
Mean DINO
(b) NeST-Com
10 dB
2 / 2/3
2 / 3/4
2 / 5/6
4 / 1/2
4 / 2/3
0.75
0.80
Mean DINO
(c) ARPC
4 dB
2 / 2/3
0.285
0.300
Mean DINO
(d) ARPC
10 dB
4 / 2/3
0.550
0.575
Mean DINO
Row labels: QAM bits/symbol q / nominal code rate. Each point averages 1,000 sources after three noises.