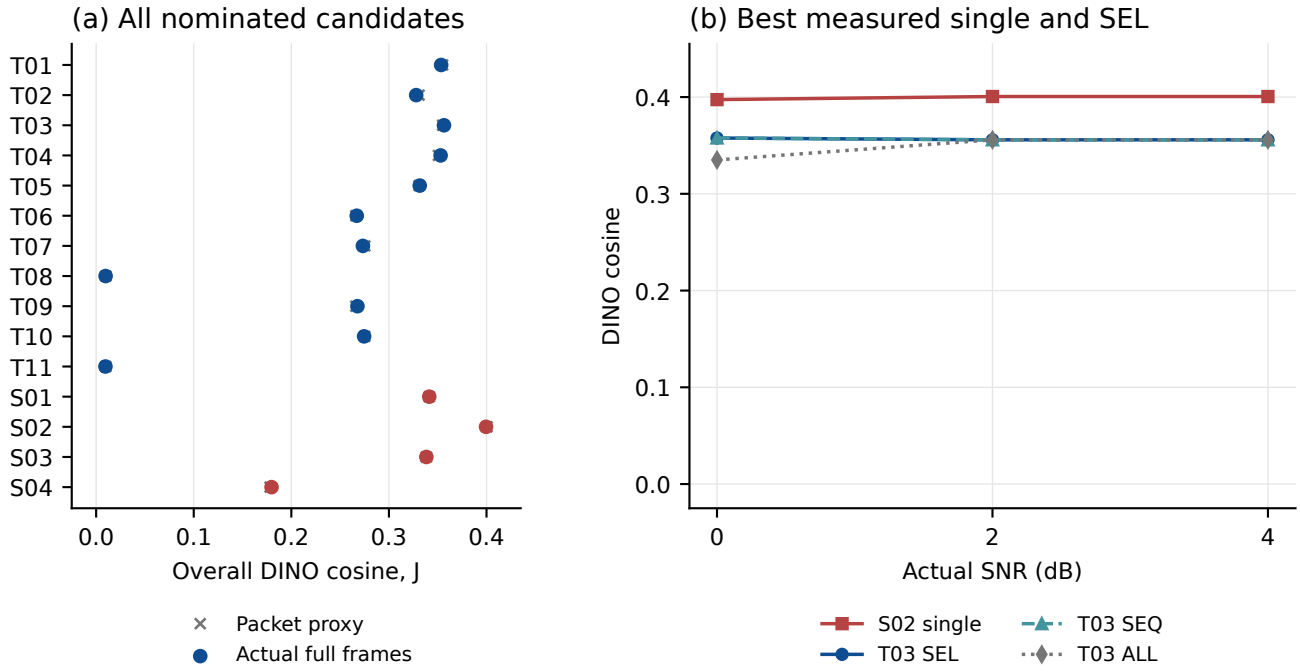
32 calibration sources · fixed TX policy · N = 1024
(a) All nominated candidates
T01
T02
T03
T04
T05
T06
T07
T08
T09
T10
T11
S01
S02
S03
S04
0.0
0.1
0.2
0.3
0.4
Overall DINO cosine, J
Packet proxy
Actual full frames
(b) Best measured single and SEL
DINO cosine
0.0
0.1
0.2
0.3
0.4
0
2
4
Actual SNR (dB)
S02 single
T03 SEL
T03 SEQ
T03 ALL