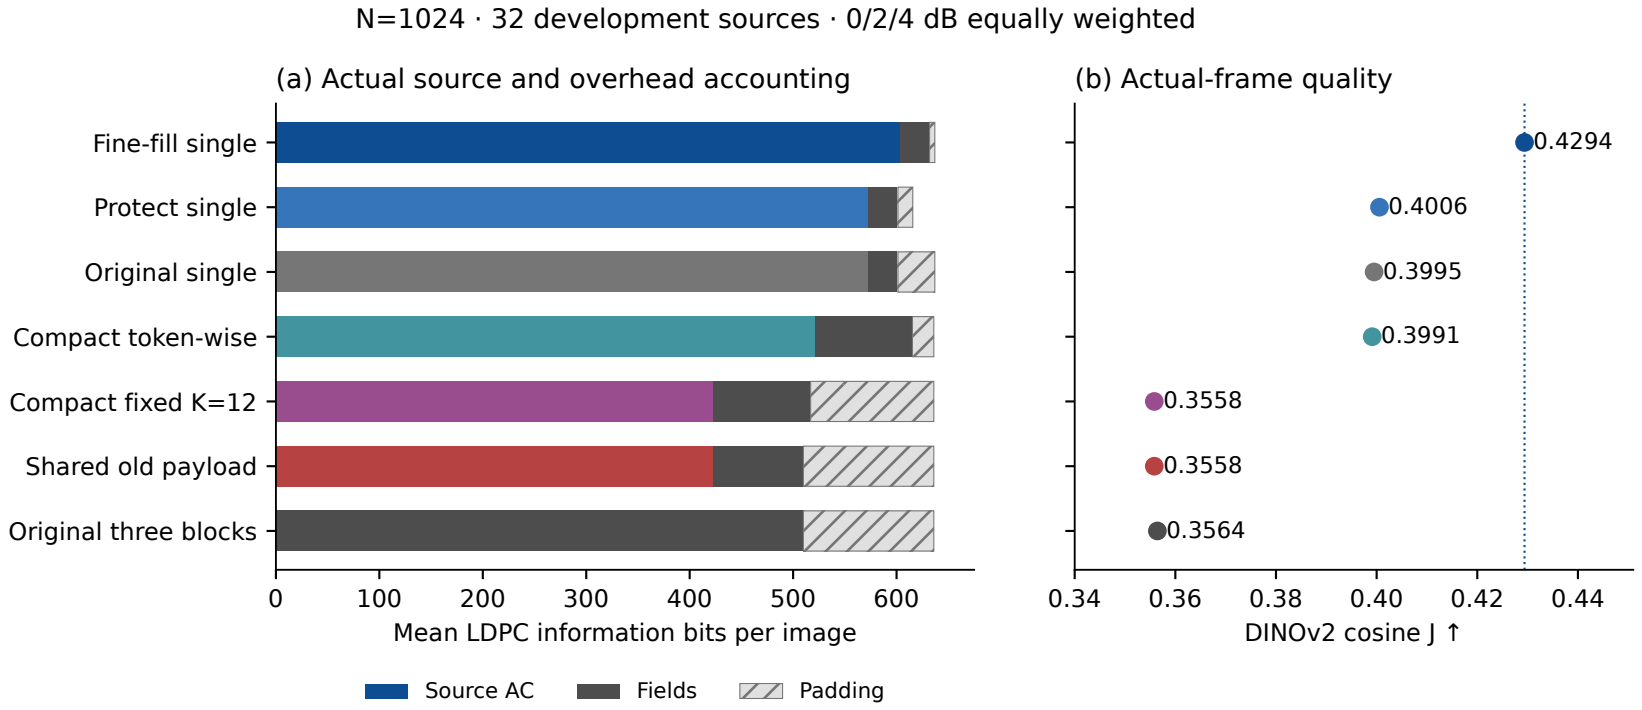
N=1024 · 32 development sources · 0/2/4 dB equally weighted
(a) Actual source and overhead accounting
Fine-fill single
Protect single
Original single
Compact token-wise
Compact fixed K=12
Shared old payload
Original three blocks
0
100
200
300
400
500
600
Mean LDPC information bits per image
Source AC
Fields
Padding
(b) Actual-frame quality
0.4294
0.4006
0.3995
0.3991
0.3558
0.3558
0.3564
0.34
0.36
0.38
0.40
0.42
0.44
DINOv2 cosine J ↑