



Daisy



File: Seed3-DevKit-Desktop\_1.kicad\_sch

Peripherals








File: Seed3-DevKit-Desktop\_2.kicad\_sch


Audio




File: audio.kicad\_sch

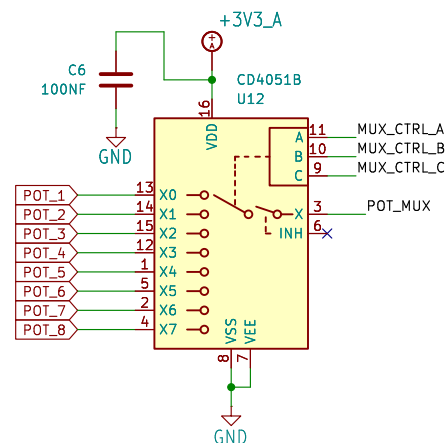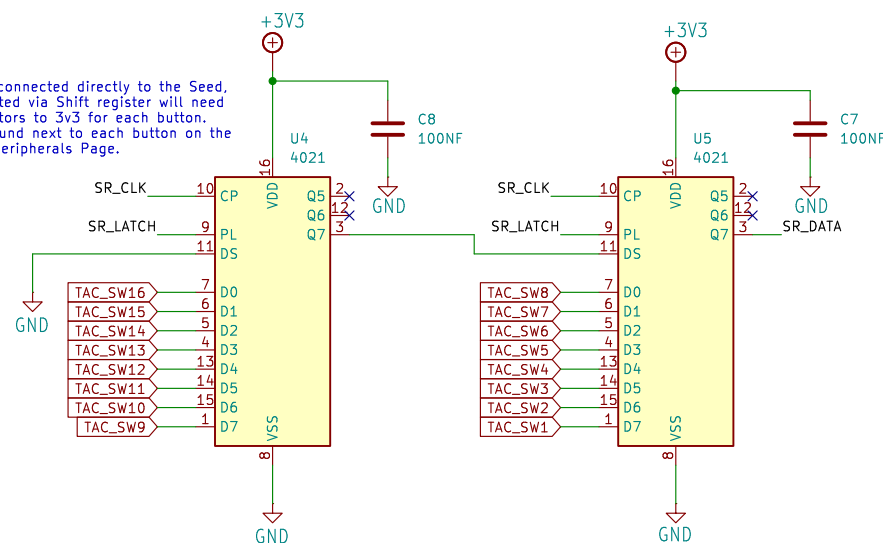




Switches + Pots

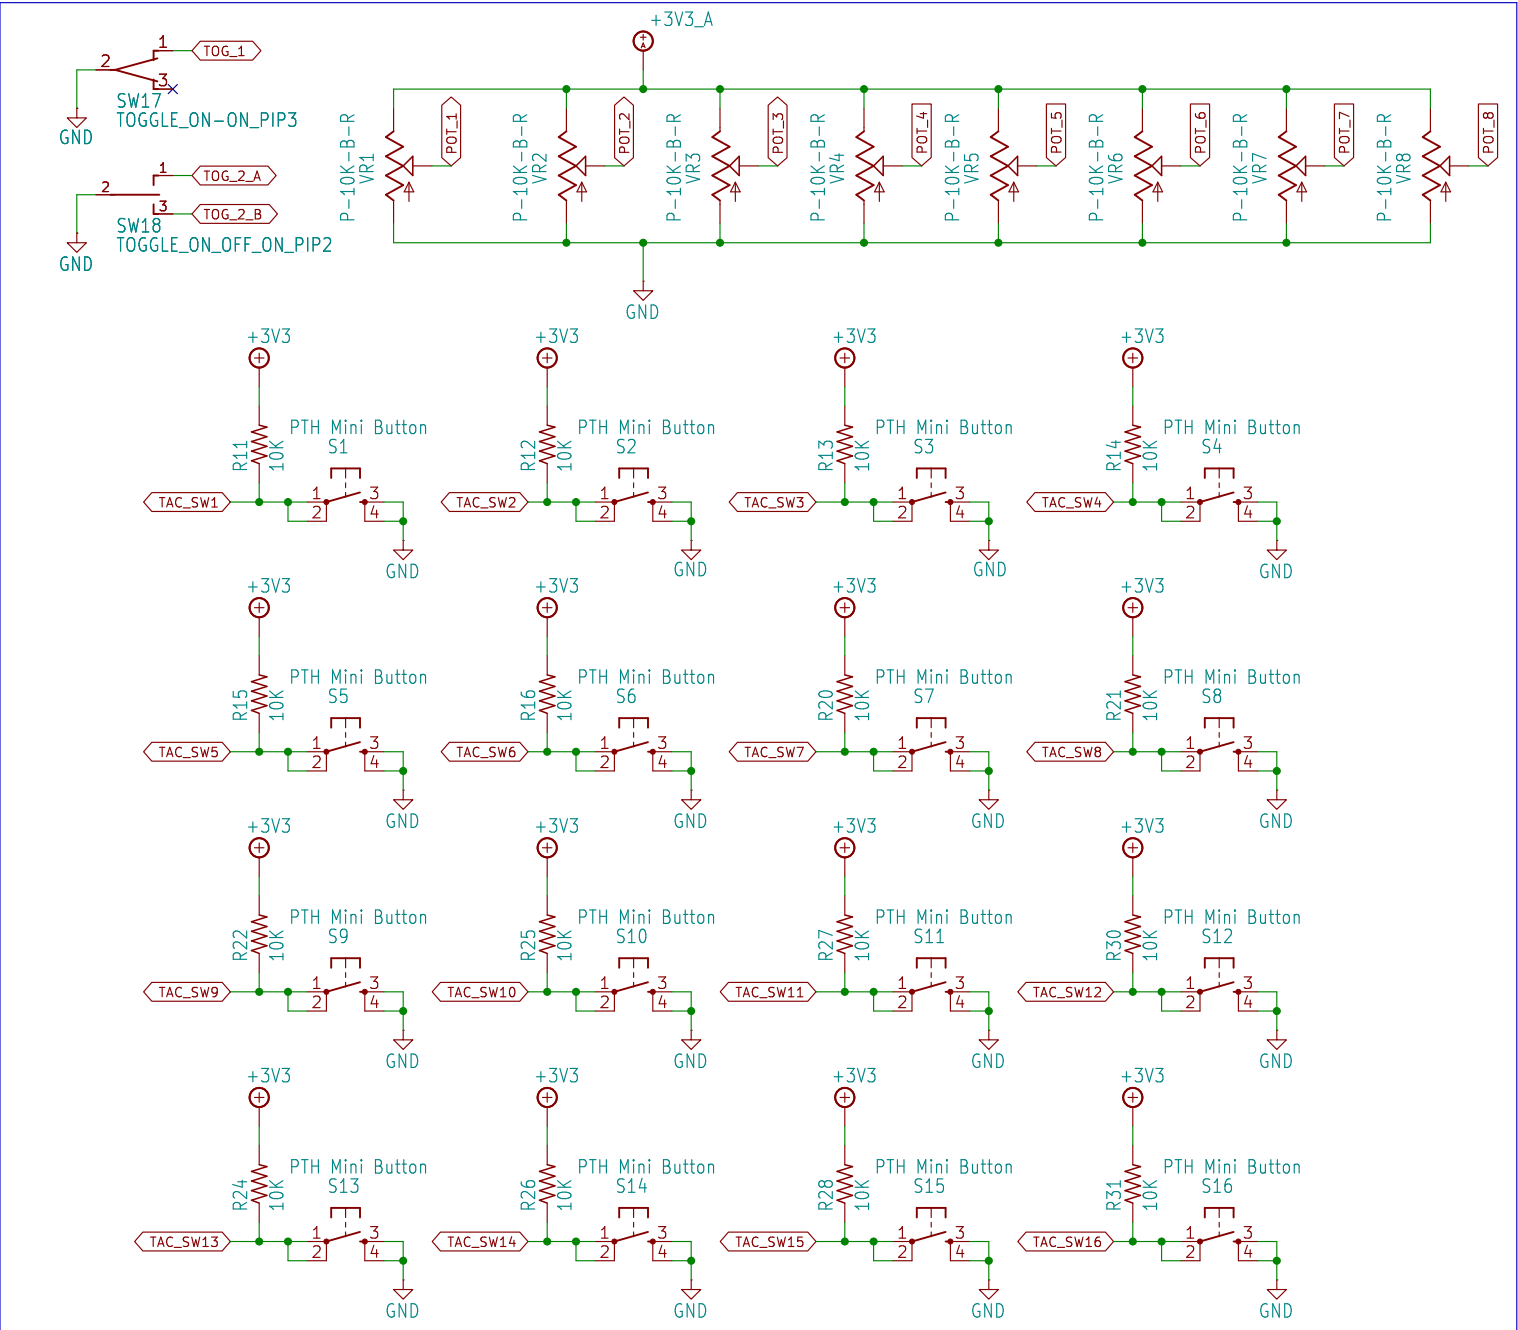



LEDs

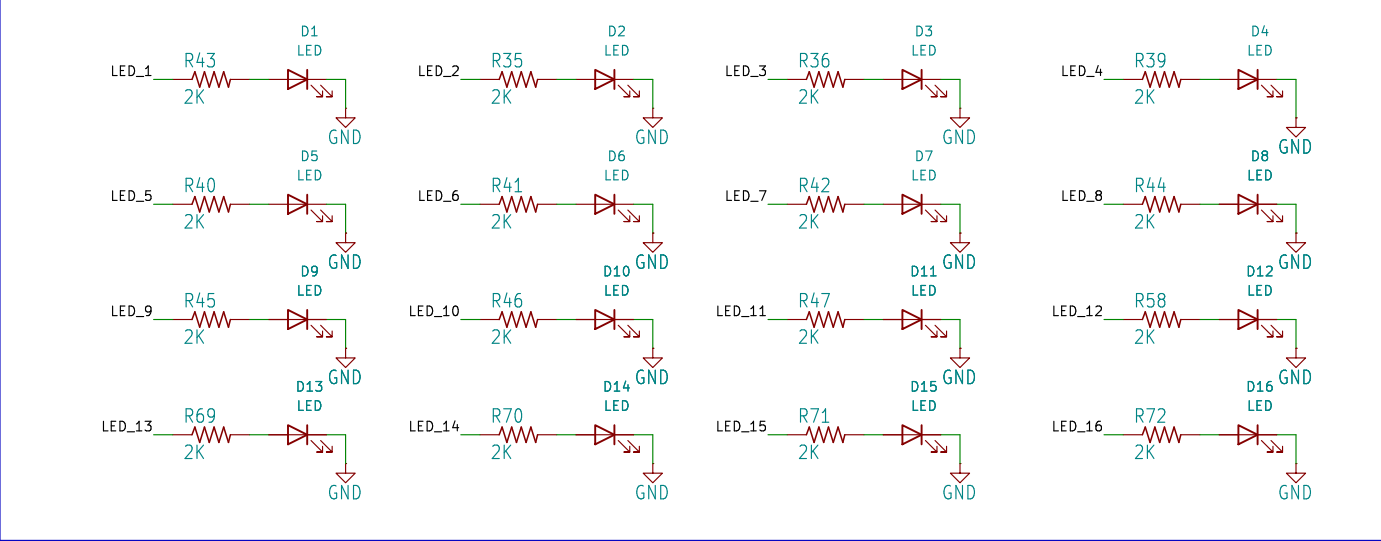


MIDI

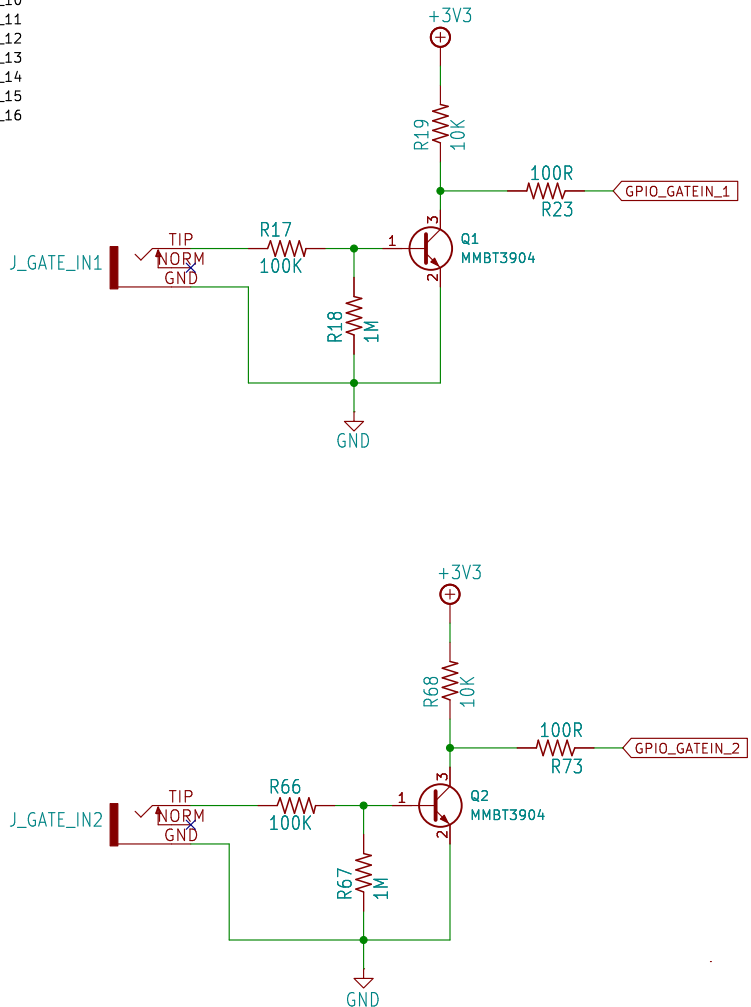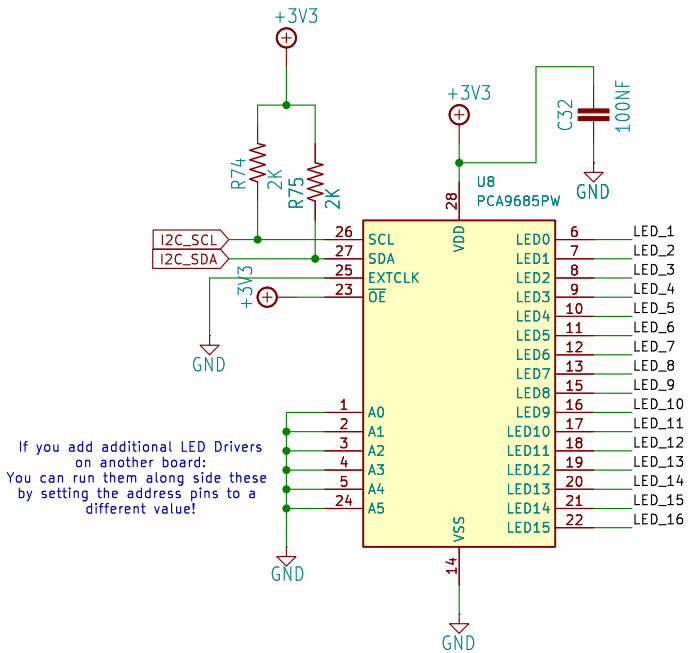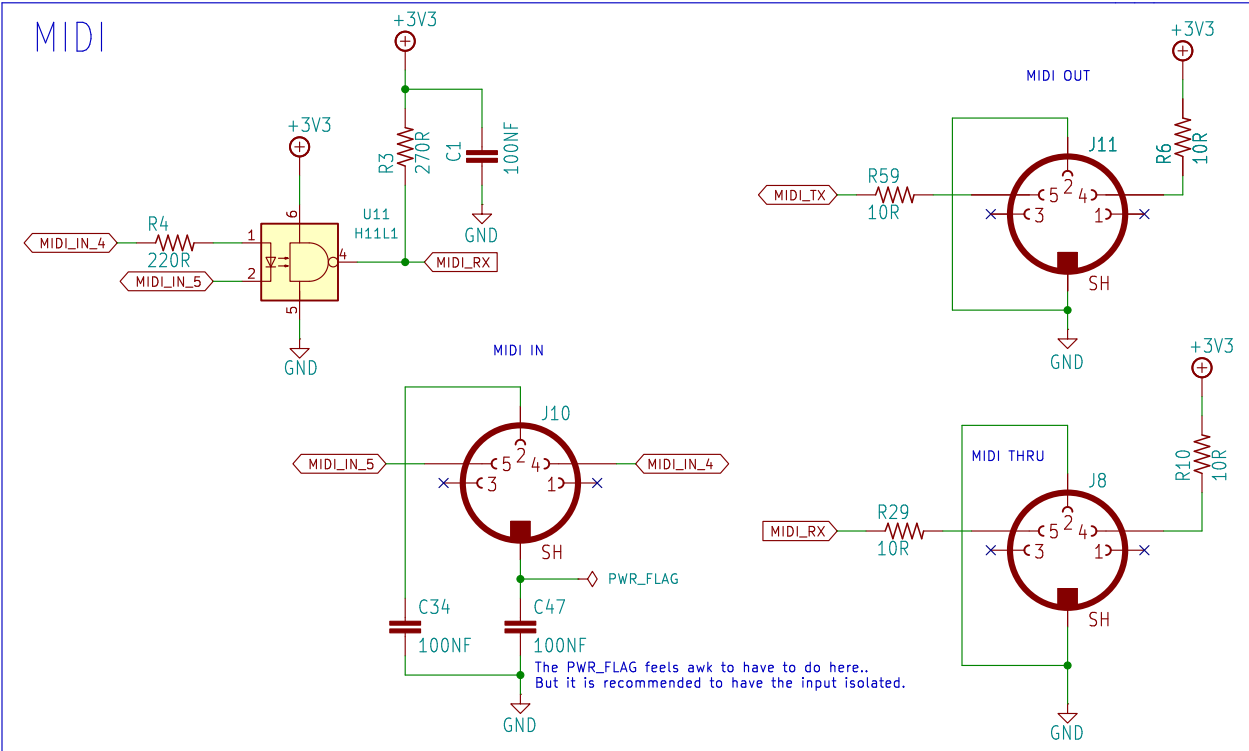

SD Card

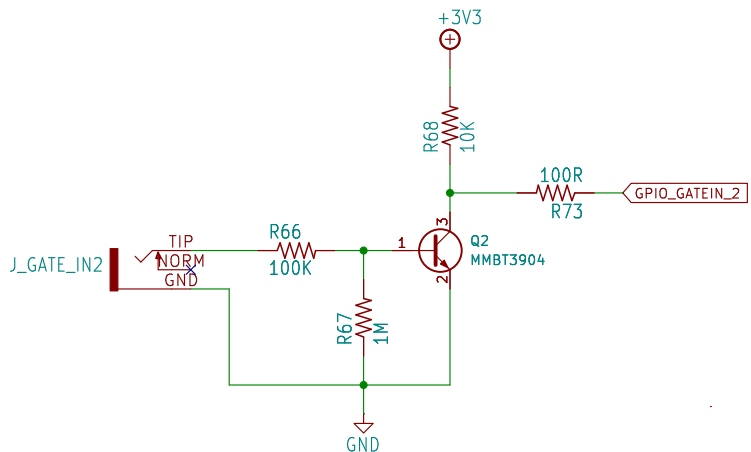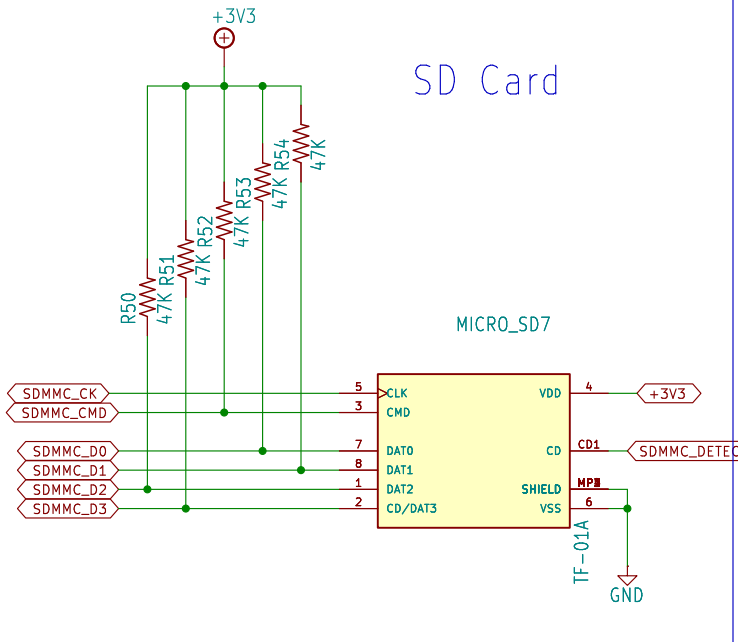

## AUDIO I/O

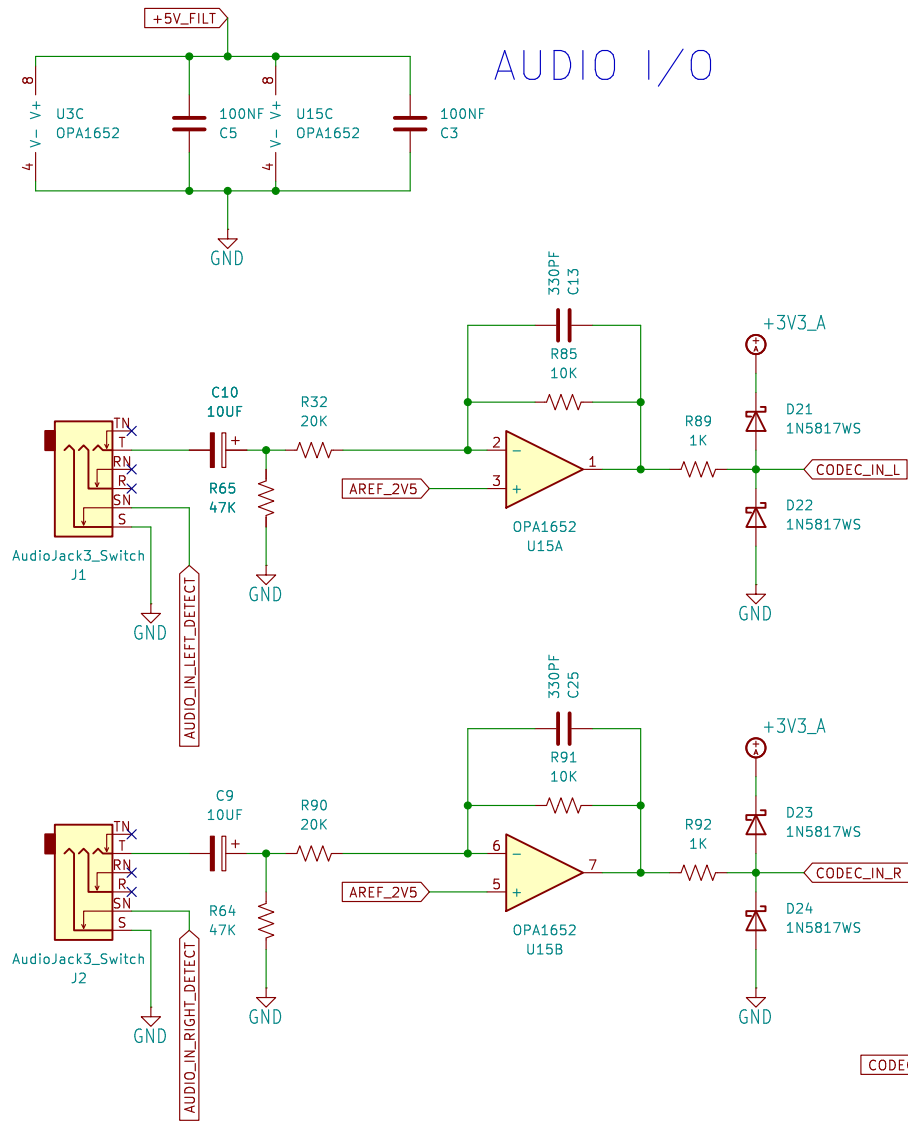


Gain is set to target +4dBu (maximum)  
obviously this does not make it a pro-line-level device that way..  
we'd need to probably have a certain amount of headroom.  
If, instead we look at this as a -10dBV device, then we have  
-14dB of headroom with these values.

$G_{in}=0.814$  ( $R_{in}=10k$ ,  $R_{fb}=16k$ )  
 $G_{out}=1.228$  ( $R_{in}=10k$ ,  $R_{fb}=24k$ )

Alternatively we can go closer to the PCM3060's "2Vrms" reference and just do:  
 $G_{in}=0.5$ ,  $G_{out}=2$  :shrug:

For now, I've implemented the left channel of audio with less atten/gain.

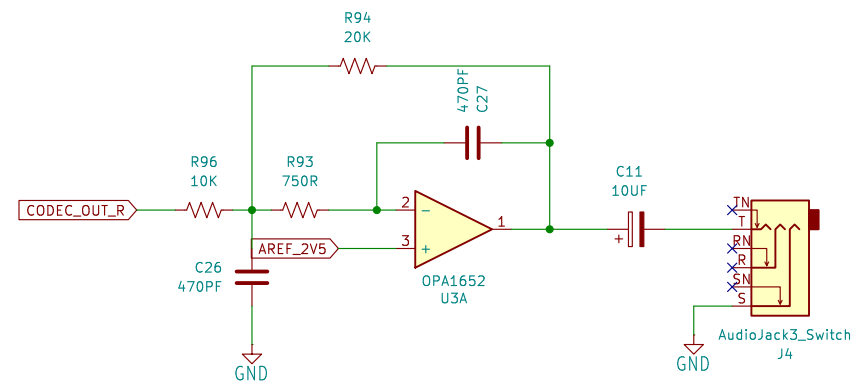

I updated these to be gain of 2.  
However, I'm not really sure how the math works out for the other two values..  
So, I may just need to kludge those a bit IRL.  
(This can also be reworked to be our normal basic filter)

