

Daisy



File: Seed3-DevKit-Desktop_1.kicad_sch

Peripherals



File: Seed3-DevKit-Desktop_2.kicad_sch

Audio



File: audio.kicad_sch

POWER

The +5V is powering:
- Headphone Amp
- DAC output op-amp
- Reference voltage for CV inputs
- 6002 buffer for AREF_AUDIO_BIAS



QR1



- H1 MOUNT-PAD-ROUND3.5
- H2 MOUNT-PAD-ROUND3.5
- H3 MOUNT-PAD-ROUND3.5
- H4 MOUNT-PAD-ROUND3.5


Selecting R2 with formula:
 $R2 = (V_{out}/V_{ref} - 1) \times R1$
Where $V_{ref} = 1.255V$
For V_{out} : where $R1 = 10K$ and $R2 = 62K$
 $(R2/R1)+1 \times V_{ref} = V_{out}$
 $V_{out} = 9.036V$
(measured: 8.919V on hardware)

Jump Point
In case of troubleshooting
or for testing power via Battery if we want


This will drop a fair amount of voltage
Measured at 8.80V on hardware

This will drop a fair amount of voltage
Measured at 7.975V on hardware

USB C


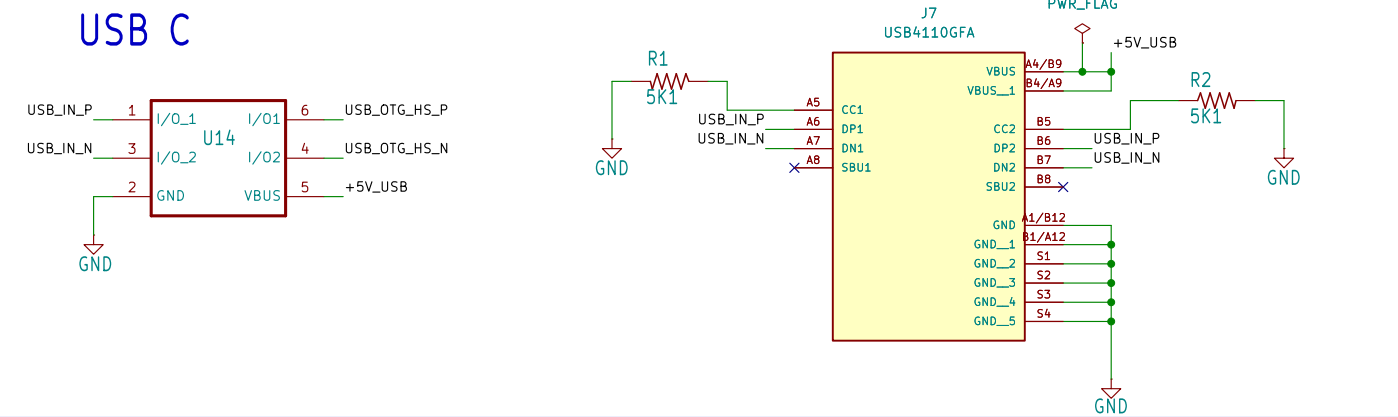


DAC / Gate Output


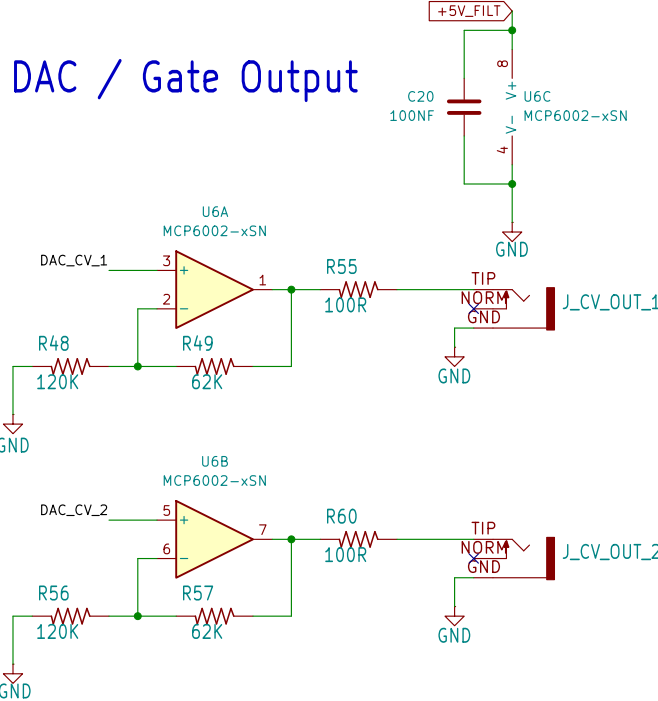


CV I/O


CV Input Circuit Info:
* Cutoff = $1 / (2\pi RC) = 4.822kHz$
* Range = -5V to 5V => 3V3 to 0V

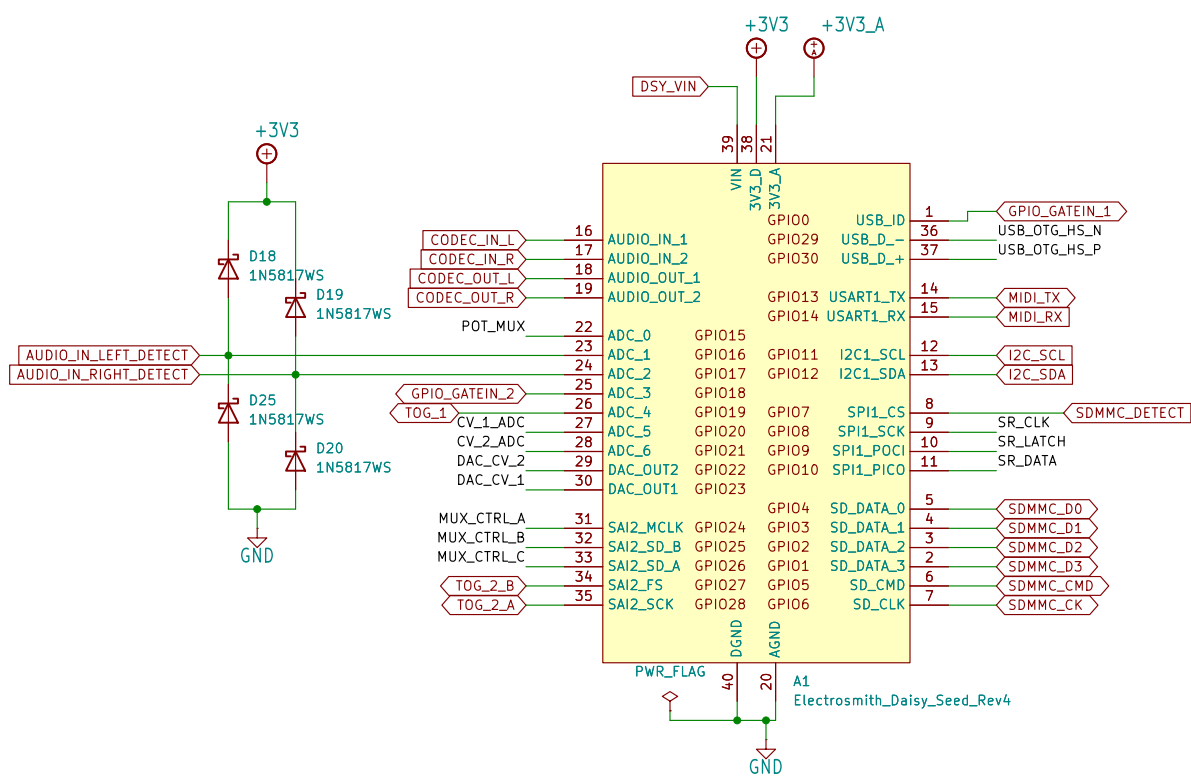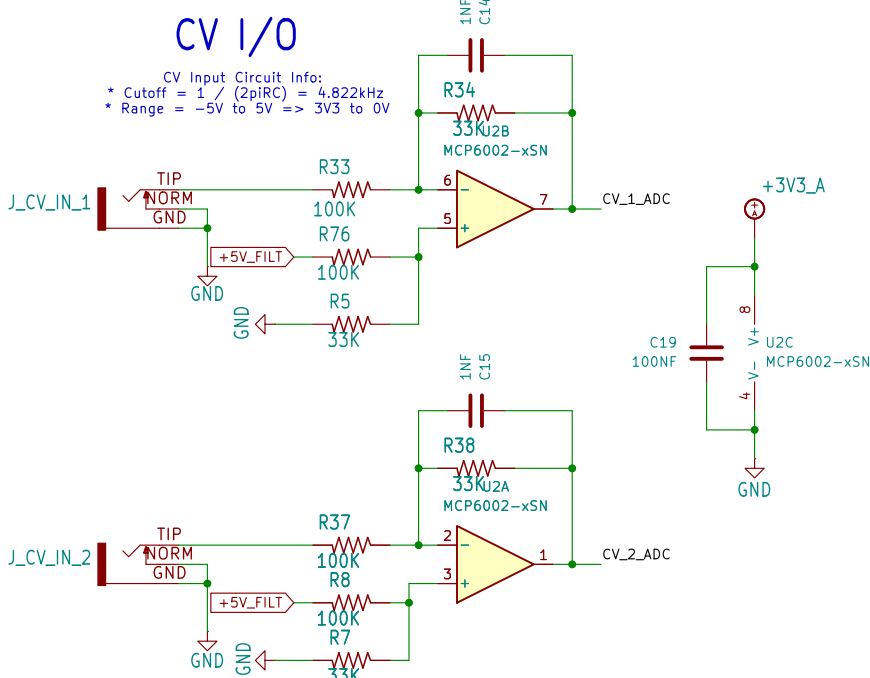


Unlike buttons connected directly to the Seed,
buttons connected via Shift register will need
pull up resistors to 3v3 for each button.
These can be found next to each button on the
Peripherals Page.

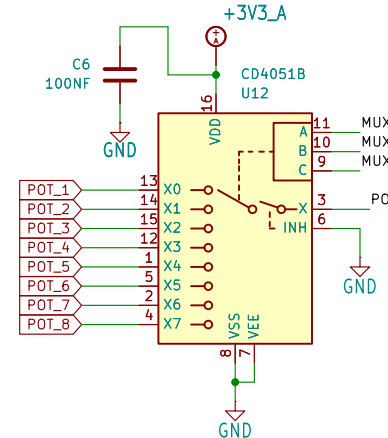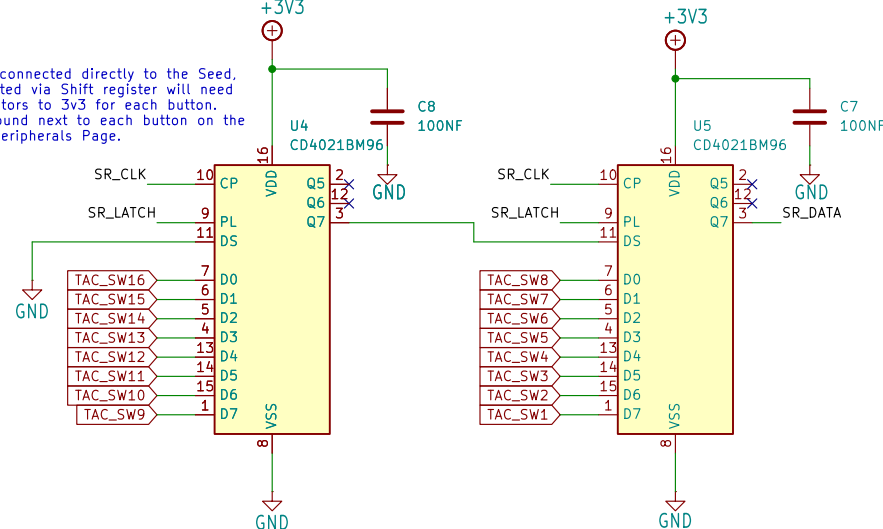



Switches + Pots

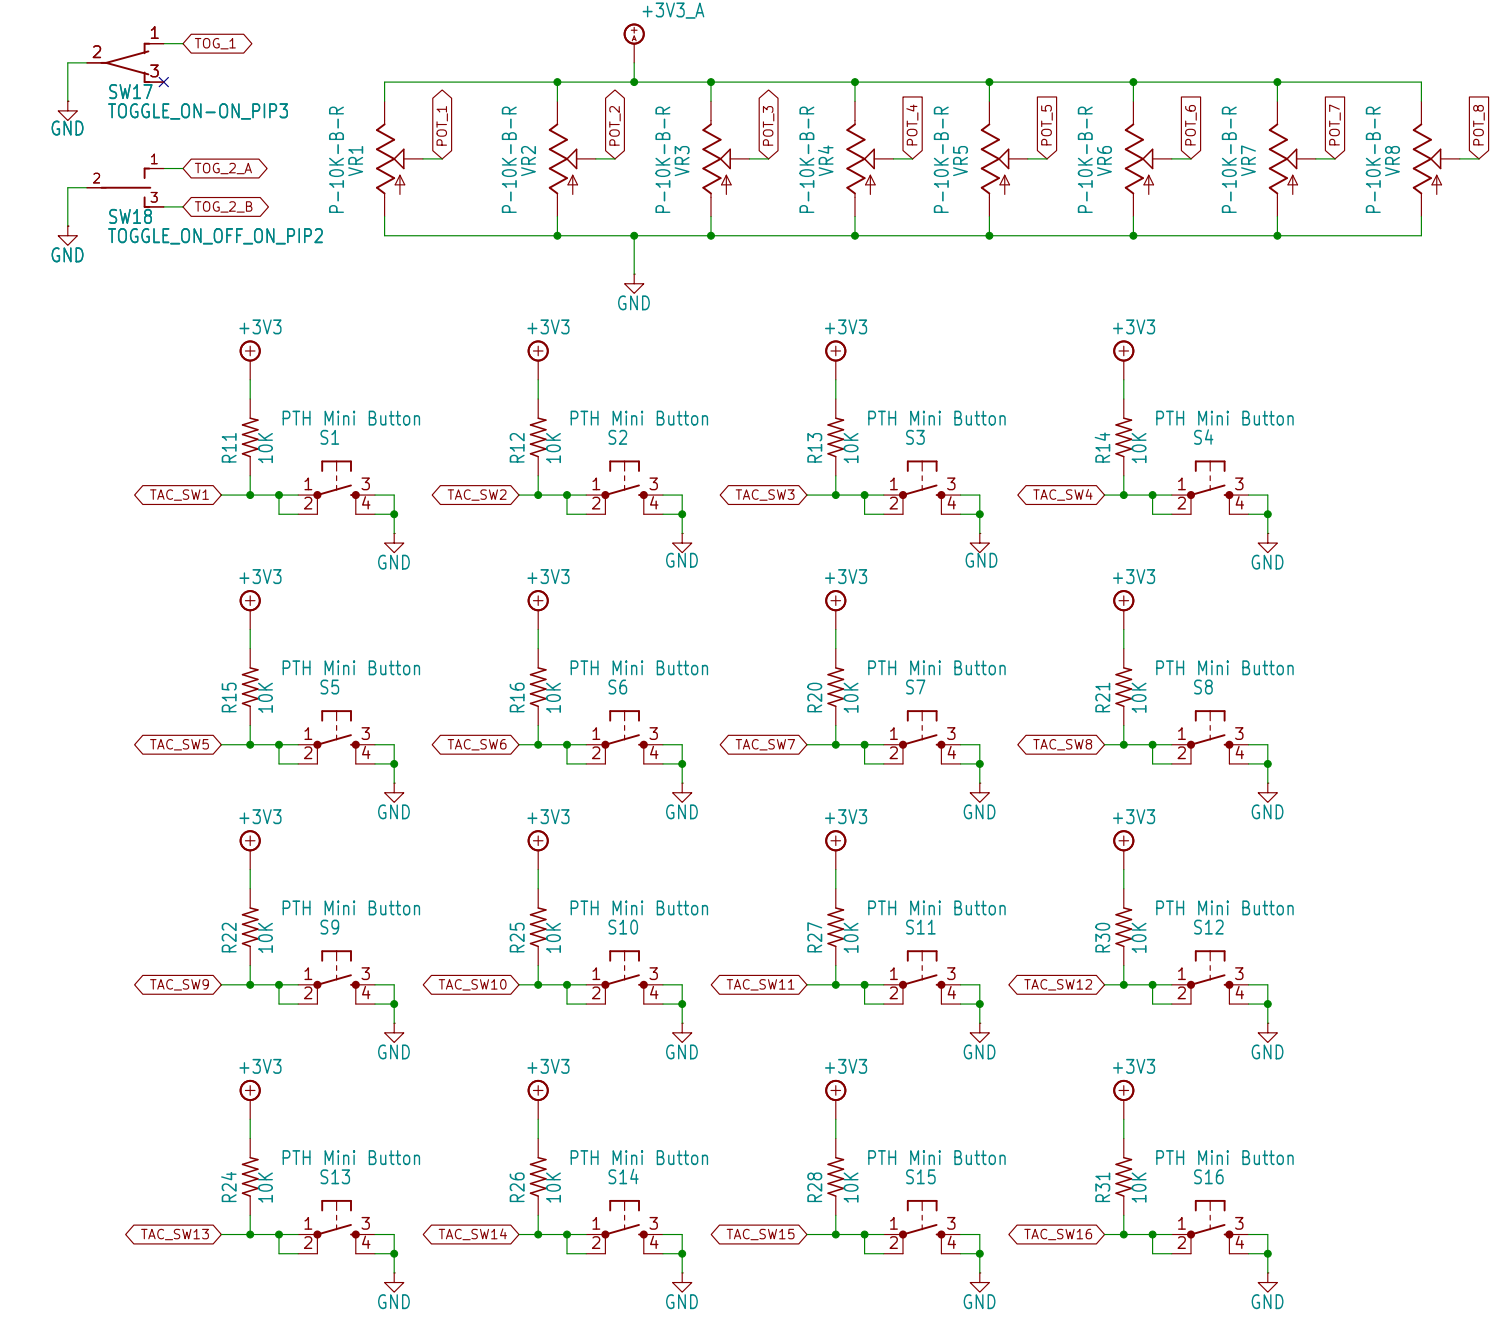


LEDs

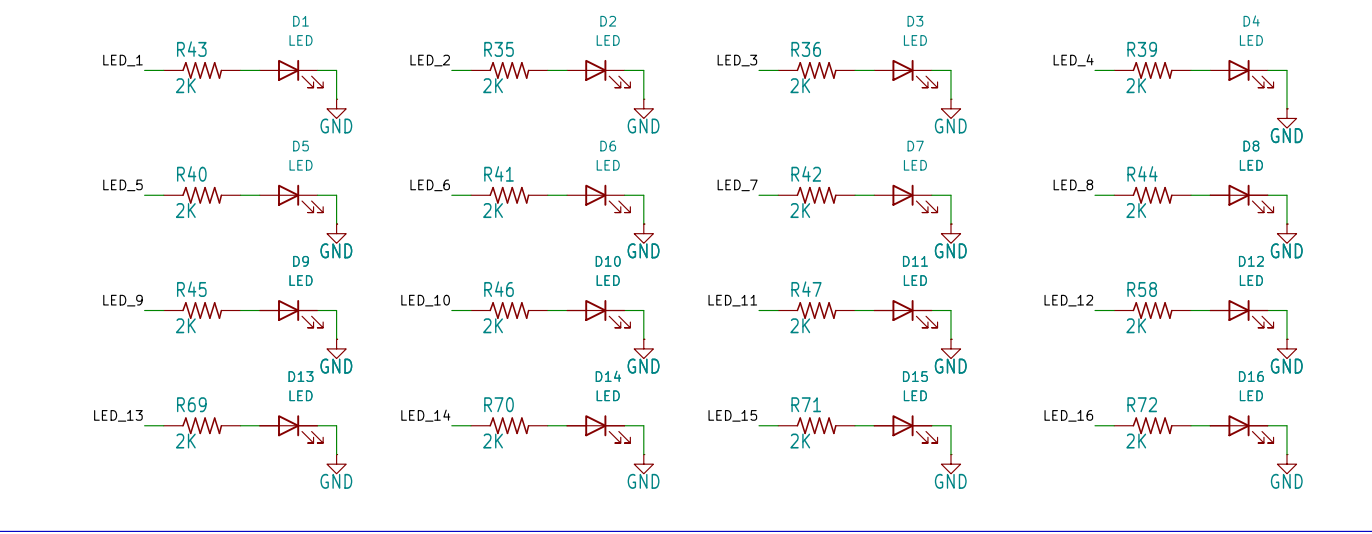

MIDI

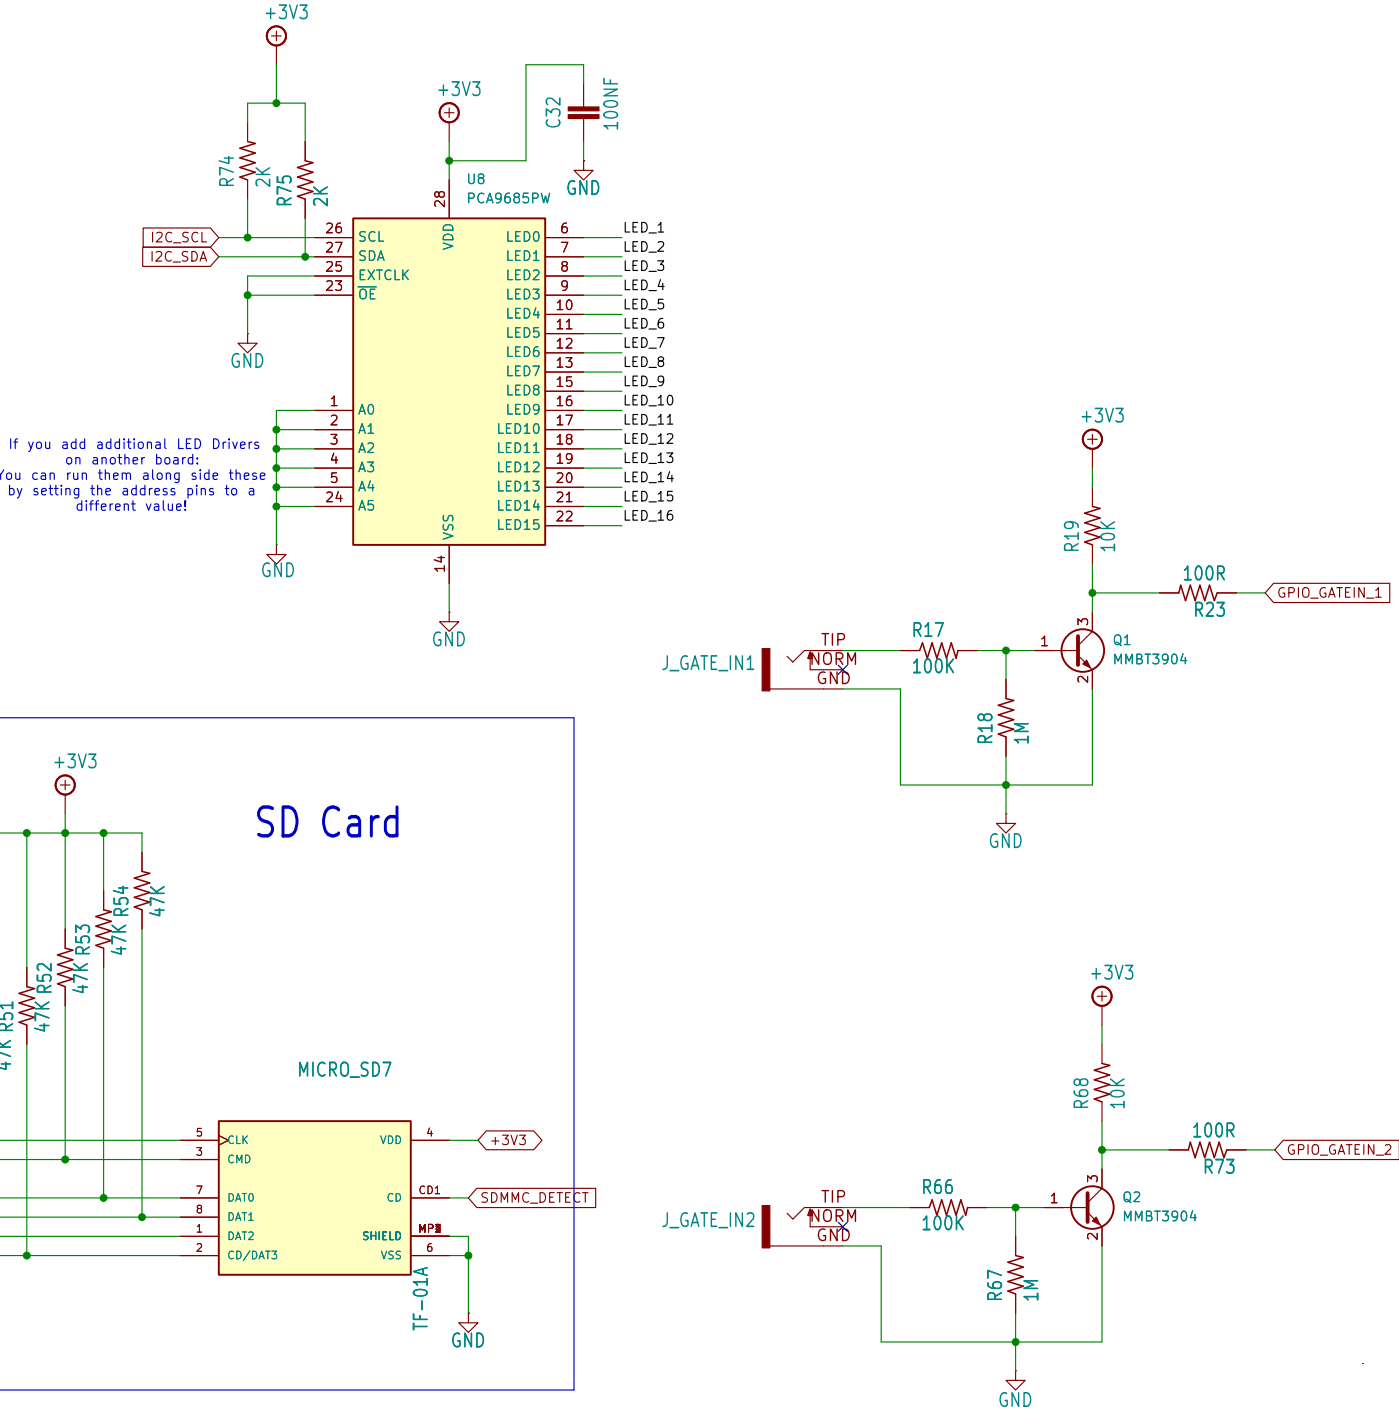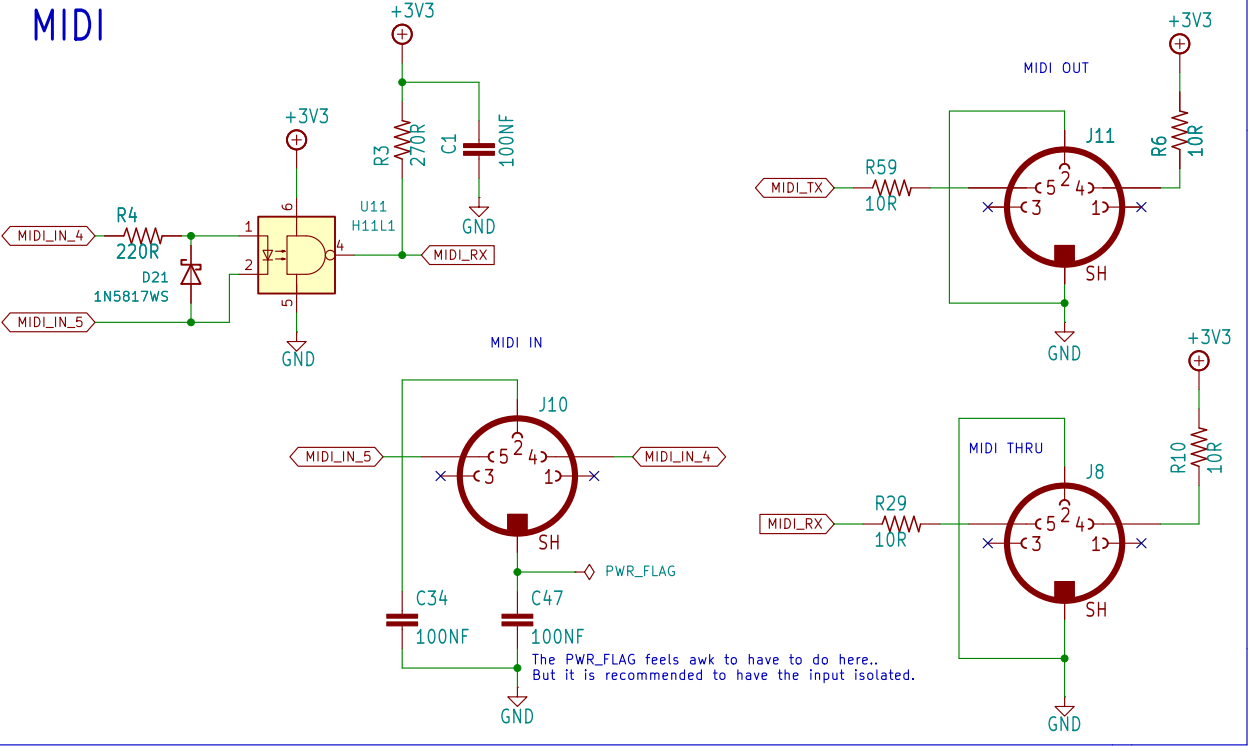

SD Card

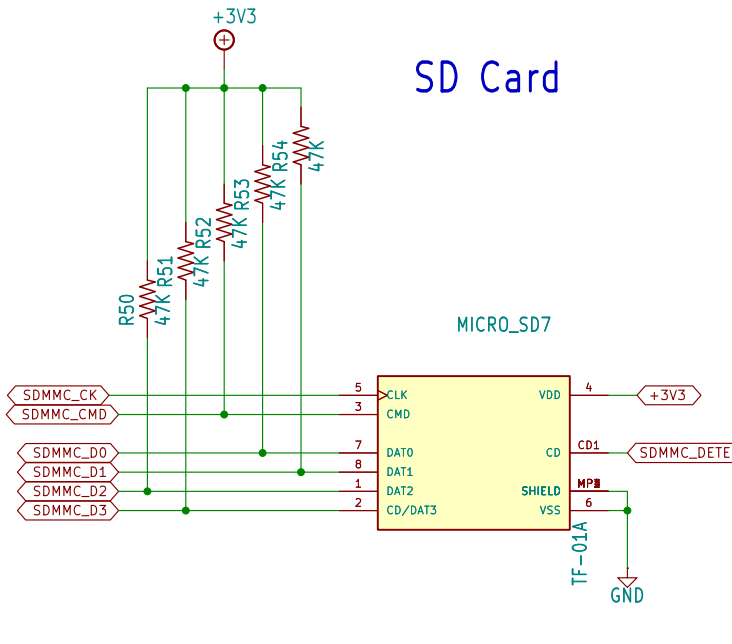

AUDIO I/O

