

Daisy



File: ES-Seed3-DevKit-Pedal-Rev1_1.kicad_sch

Peripherals



File: ES-Seed3-DevKit-Pedal-Rev1_2.kicad_sch

Audio IO




File: ES-Seed3-DevKit-Pedal-Rev1_3.kicad_sch

Power




File: ES-Seed3-DevKit-Pedal-Rev1_4.kicad_sch

Seed VIN RLC Filter

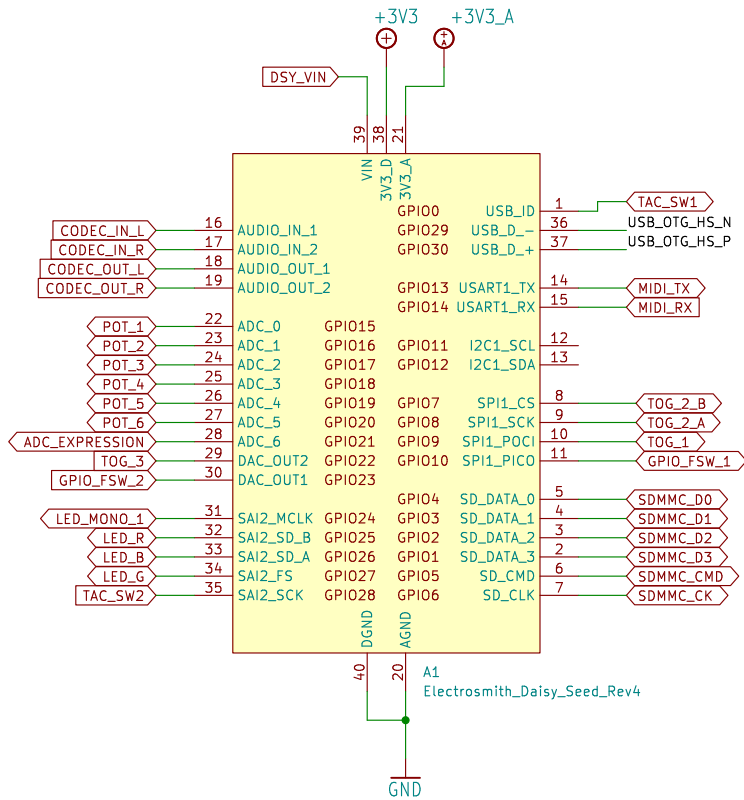


- H1 MOUNT-PAD-ROUND3.5
- H2 MOUNT-PAD-ROUND3.5
- H3 MOUNT-PAD-ROUND3.5
- H4 MOUNT-PAD-ROUND3.5



USB C

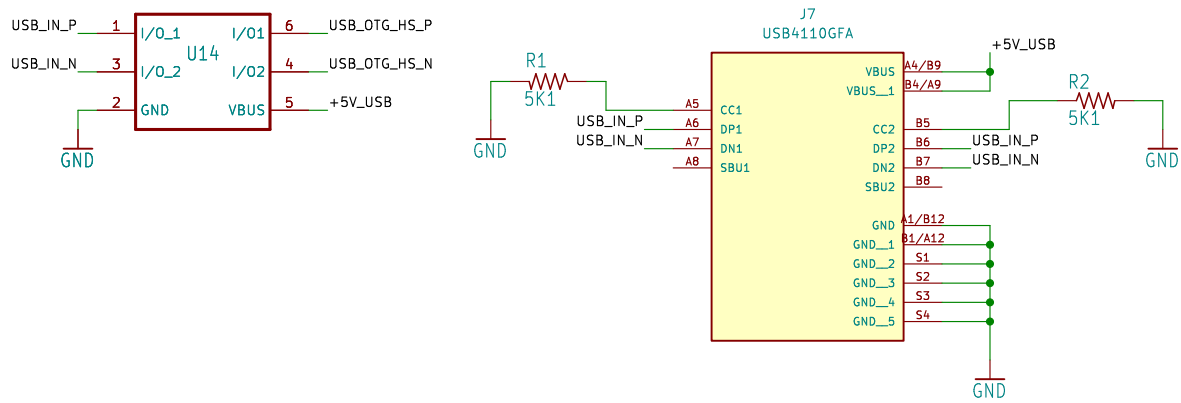


DIN MIDI In

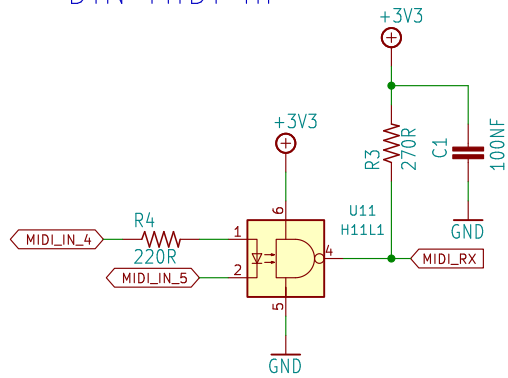


Switches + Pots

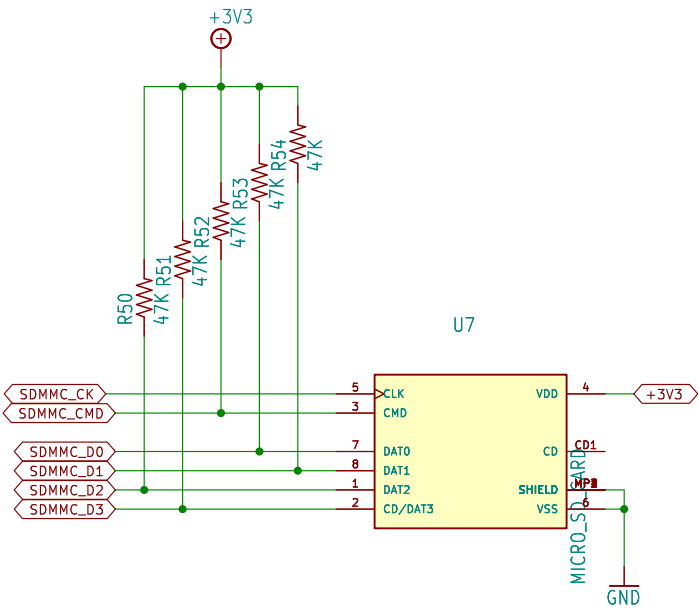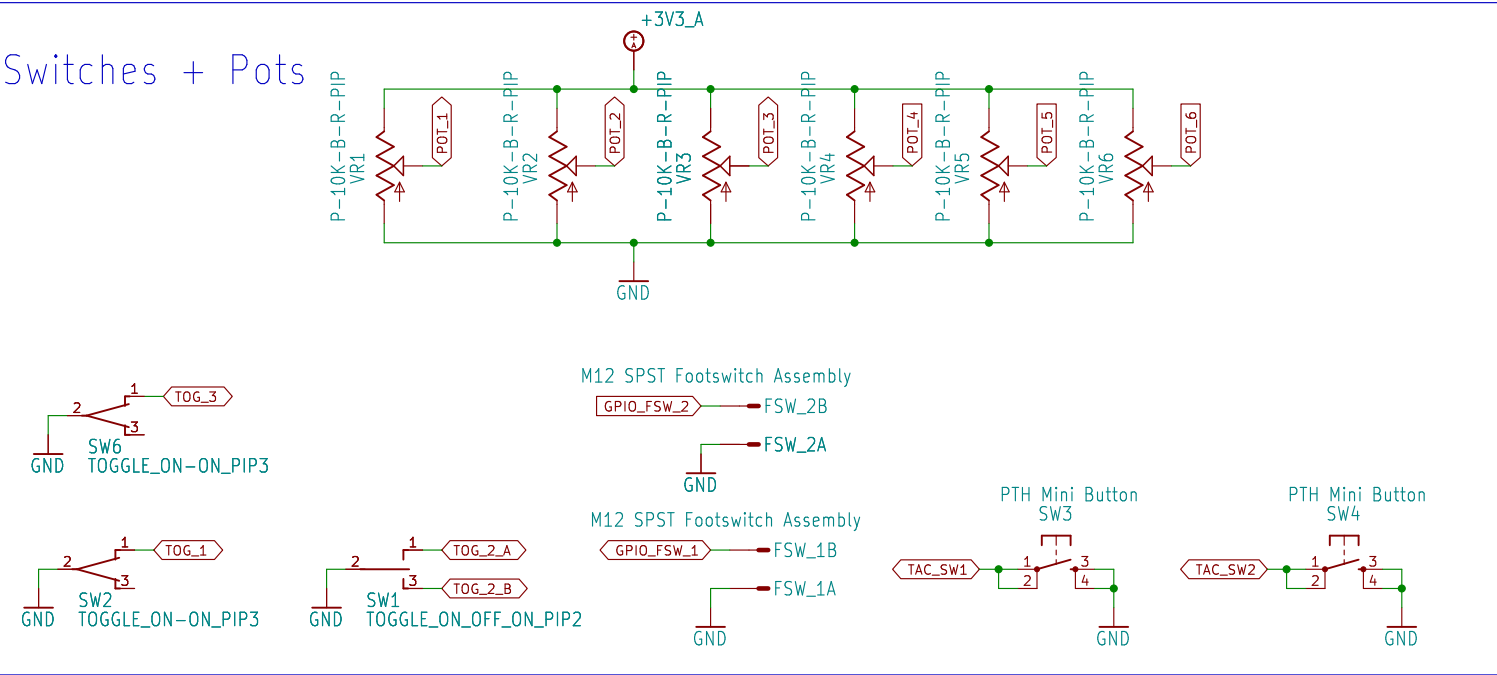

LEDs

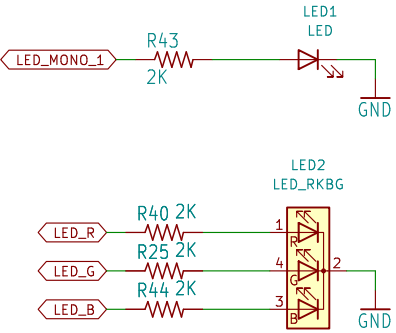

Jacks


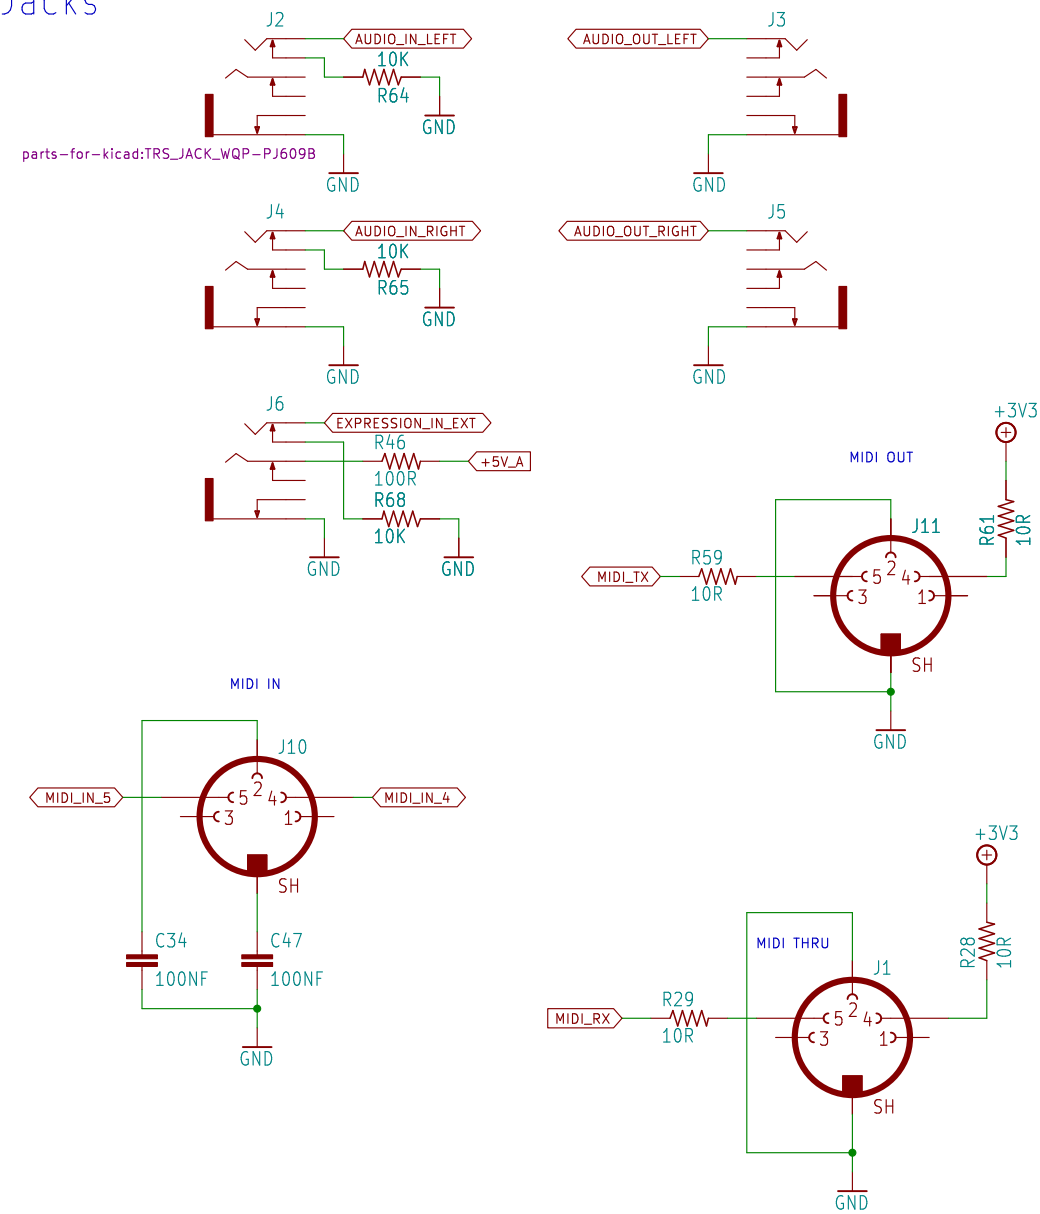


AK4558 In Range
0.8 * AVDD Vpp = 2.64Vpp @ AVDD=3.3V



AK4558 Out Range
0.76 * AVDD Vpp = 2.508Vpp @ AVDD=3.3V

This bias would ideally be 9VA / 2, but the 5VA signal will be much more noise resilient




prior stage RC filter could potentially be removed, and gain could happen here?
Fc = 58.946kHz

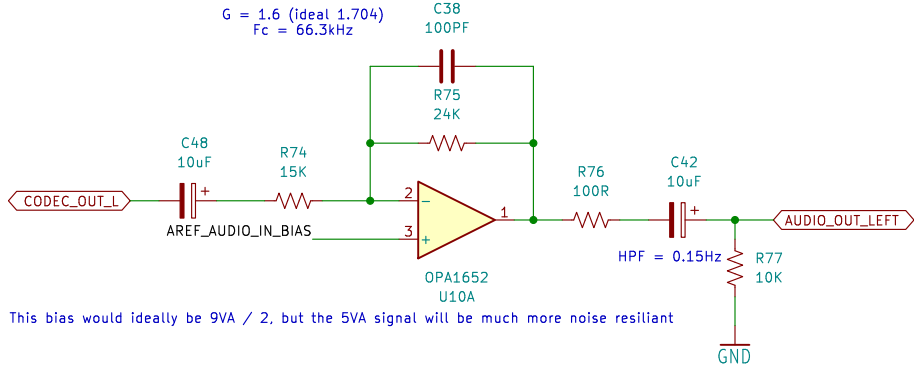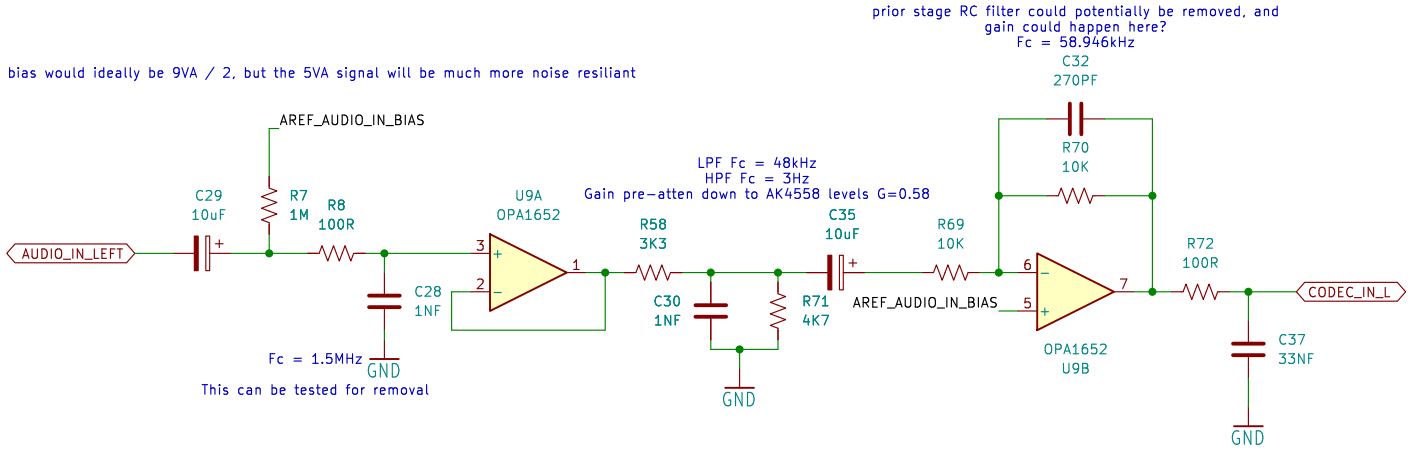

--- Identical circuits for right audio channel ---

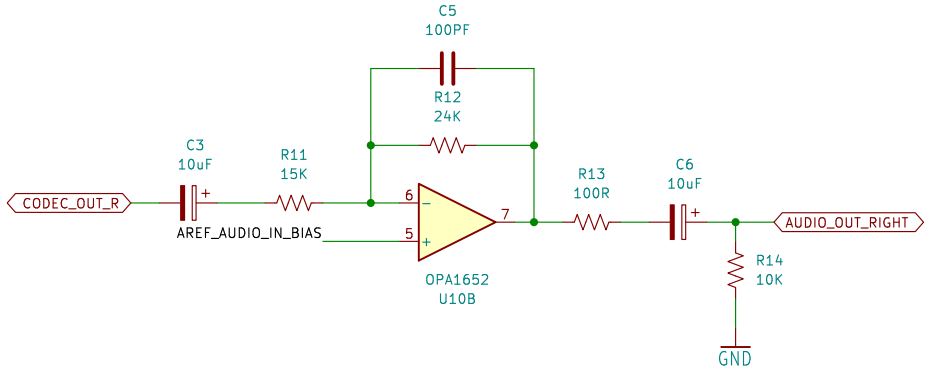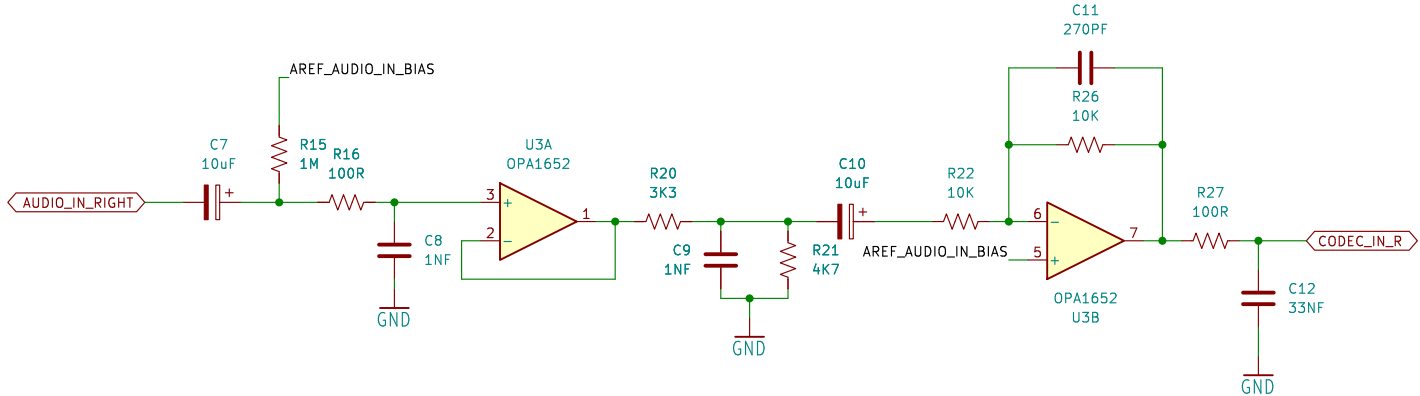

Expression In + VCOM Buffer

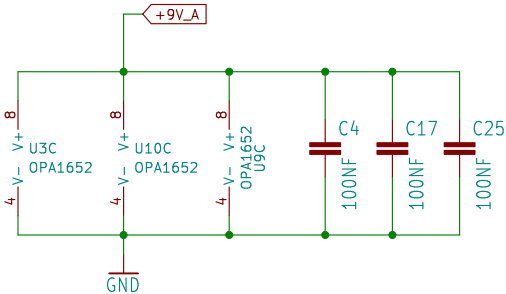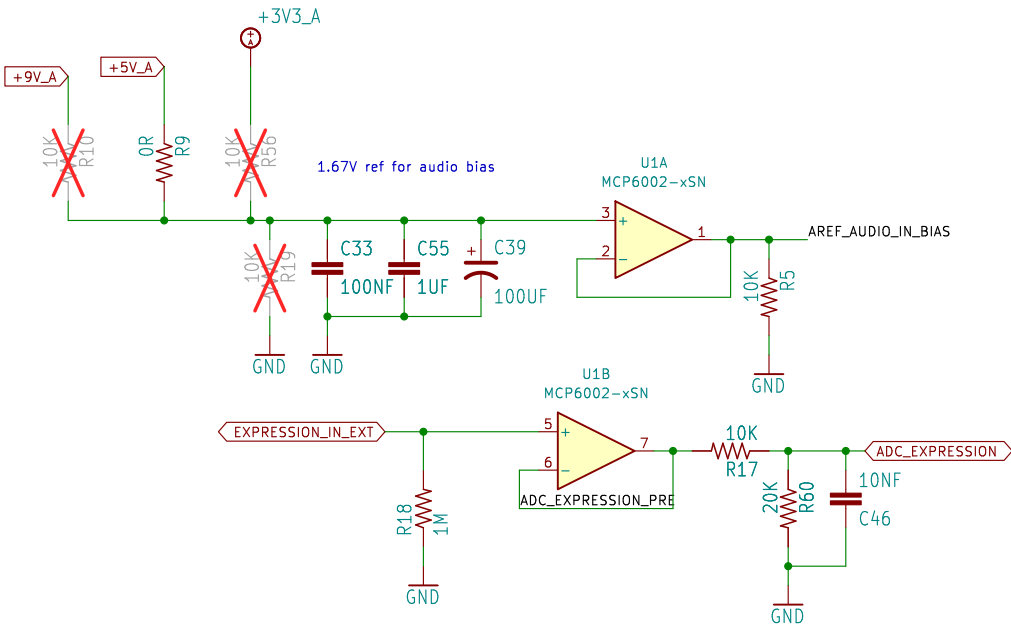

Power

