

Daisy



File: ES-Seed3-DevKit-Pedal-Rev1_1.kicad_sch

Peripherals



File: ES-Seed3-DevKit-Pedal-Rev1_2.kicad_sch

Audio IO



File: ES-Seed3-DevKit-Pedal-Rev1_3.kicad_sch

Power





File: ES-Seed3-DevKit-Pedal-Rev1_4.kicad_sch




USB_IN_P 1 1/0 1 1/0 6 USB_OTG_HS_P J7 PWR_FLAG
USB64110GEA




Switches + Pots

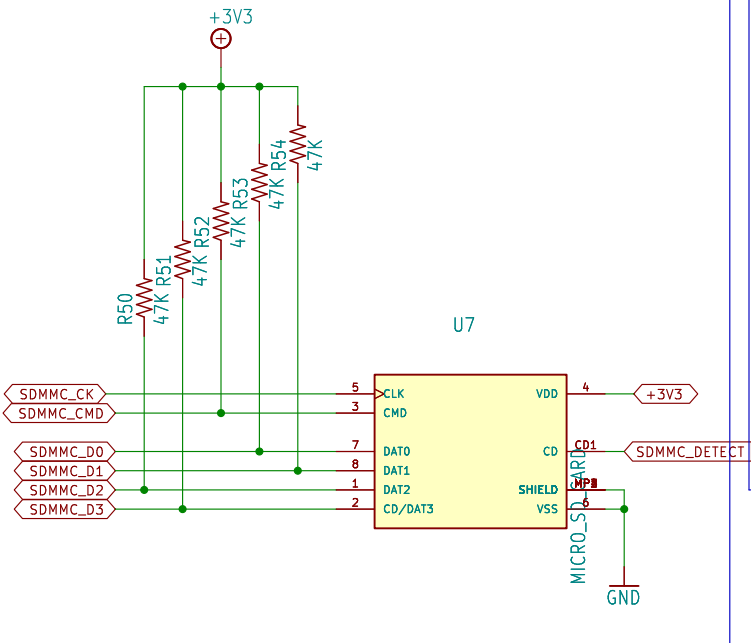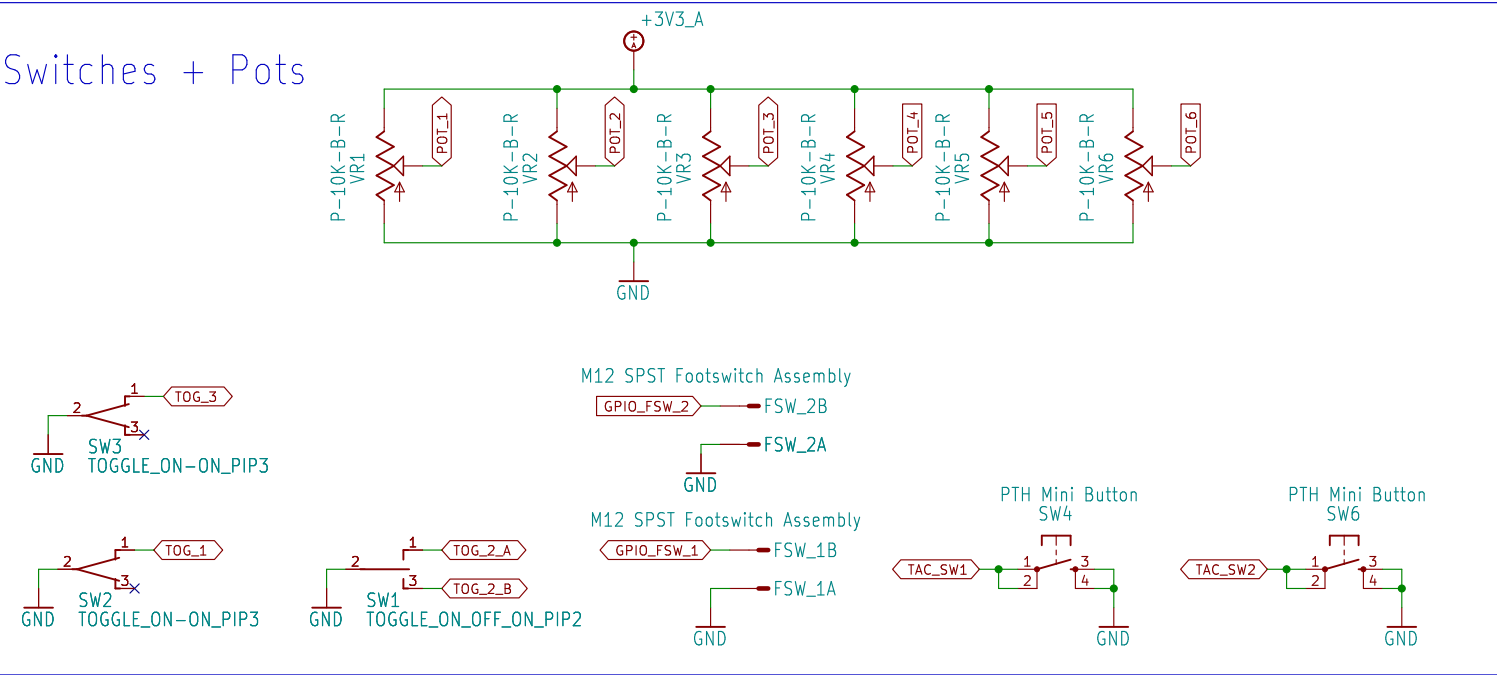

LEDs

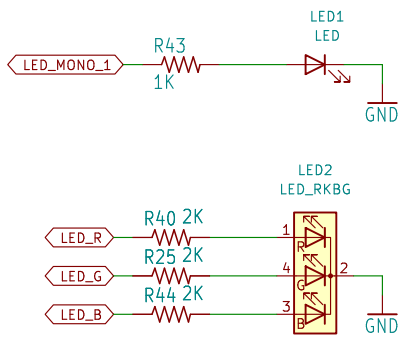



Jacks

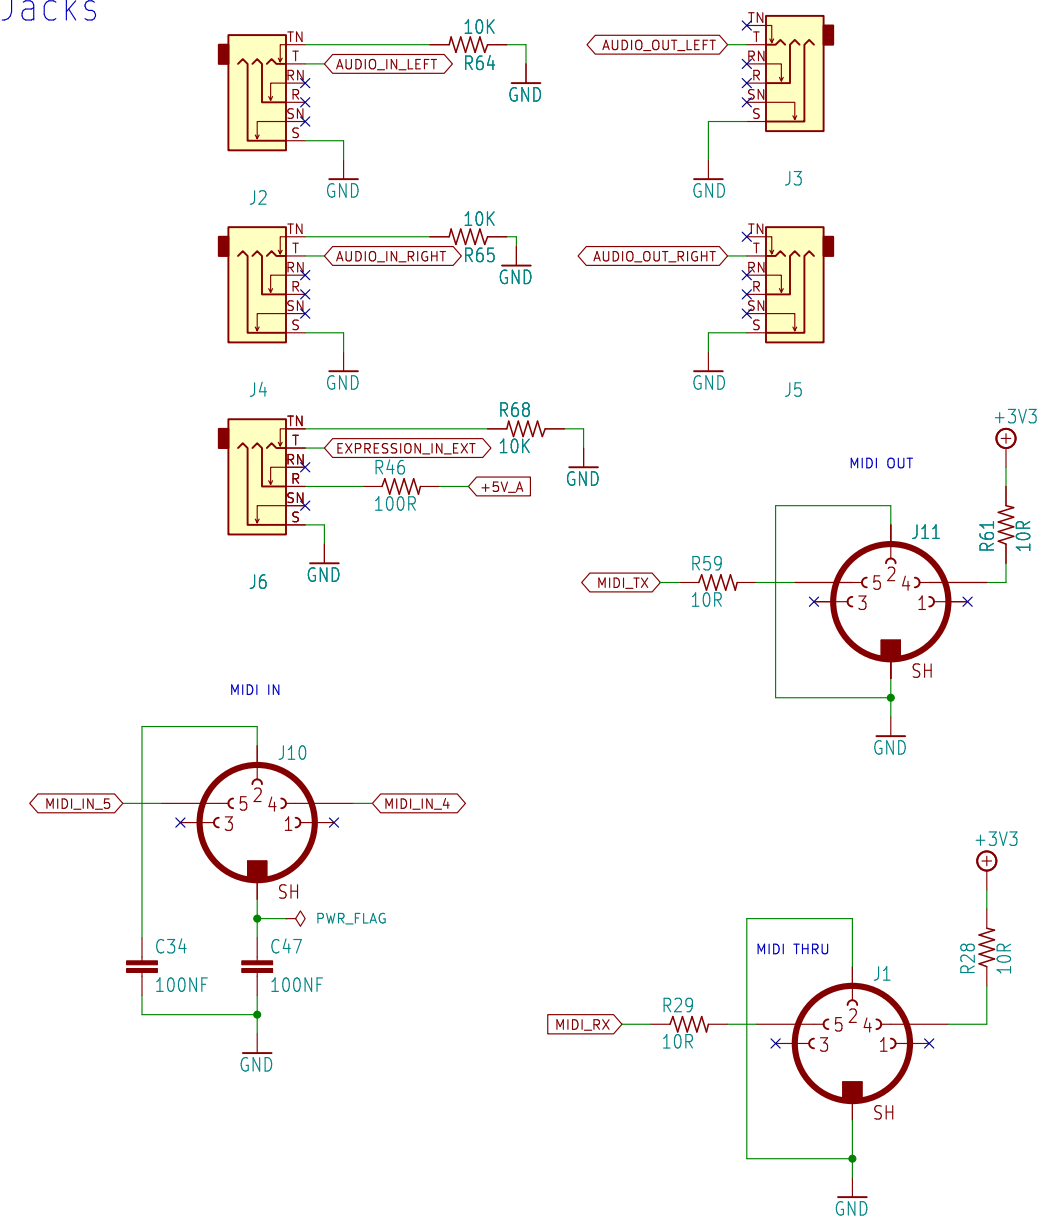



AK4558 In Range
 $0.8 \cdot AVDD$ $V_{pp} = 2.64V_{pp}$ @ $AVDD=3.3V$
AK4558 Out Range
 $0.76 \cdot AVDD$ $V_{pp} = 2.508V_{pp}$ @ $AVDD=3.3V$

prior stage RC filter could potentially be removed, and gain could happen here?
 $F_c = 58.946kHz$




This bias would ideally be $9VA / 2$, but the 5VA signal will be much more noise resilient

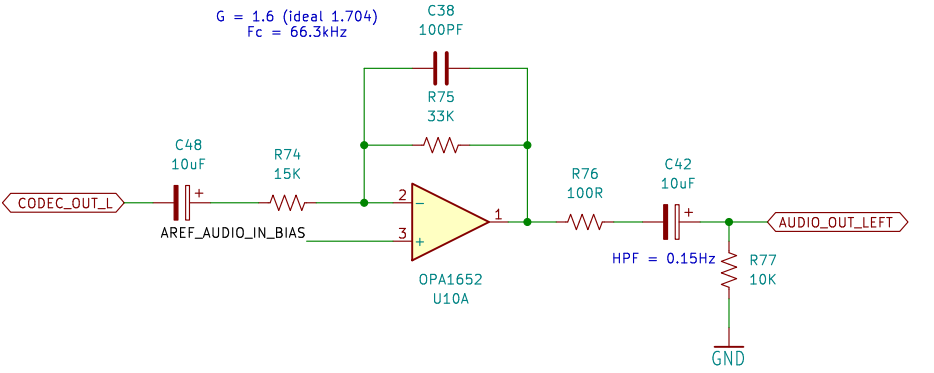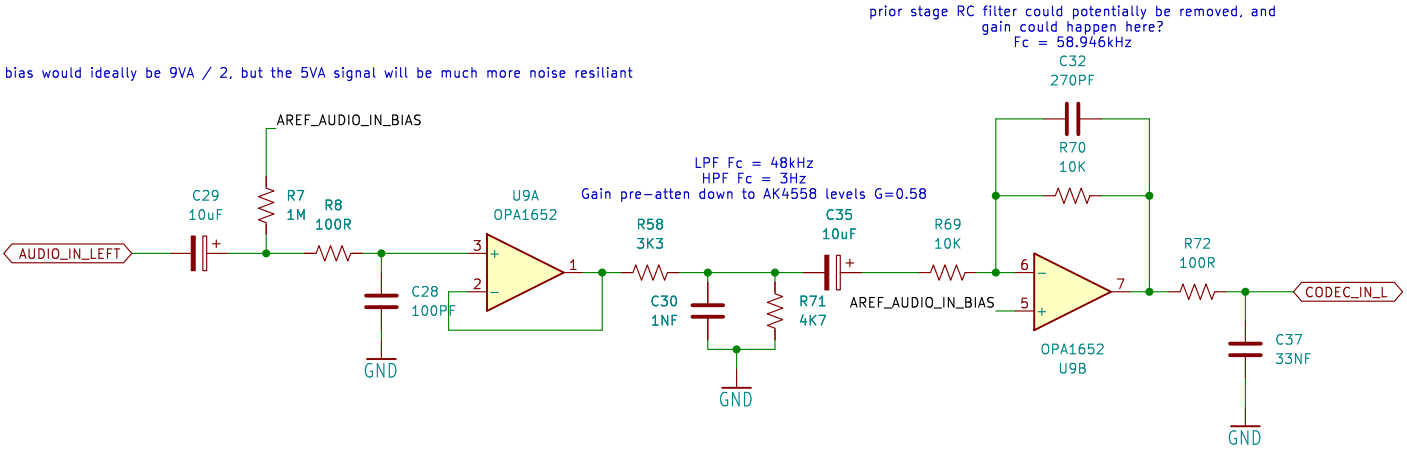

--- Identical circuits for right audio channel ---

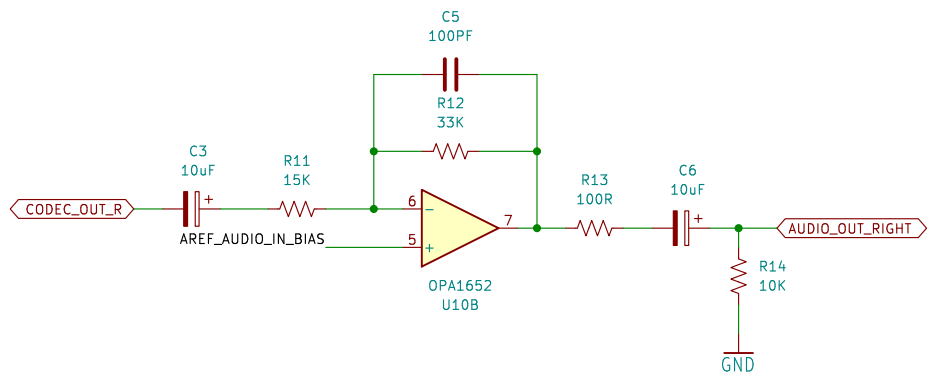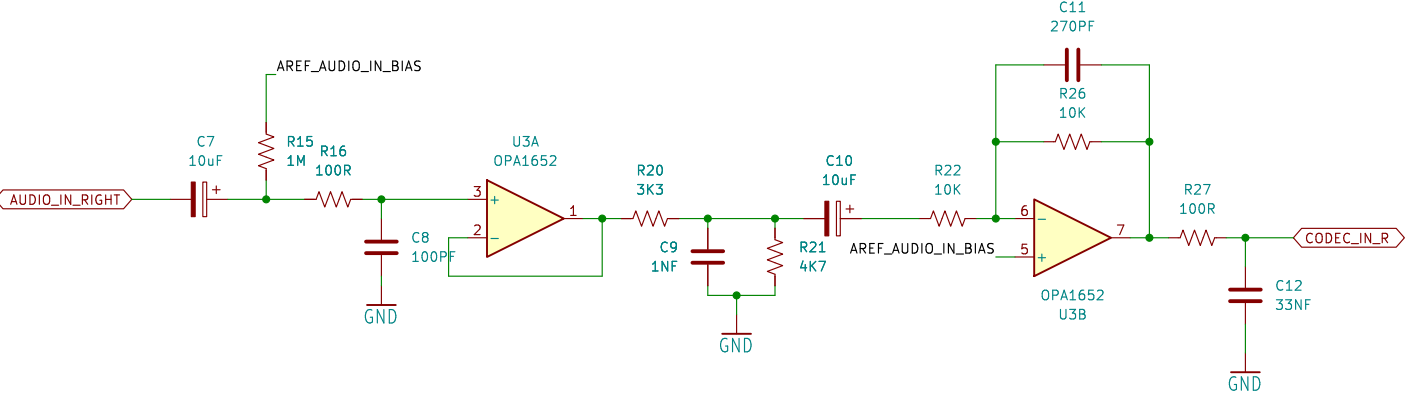

Expression In + VCOM Buffer

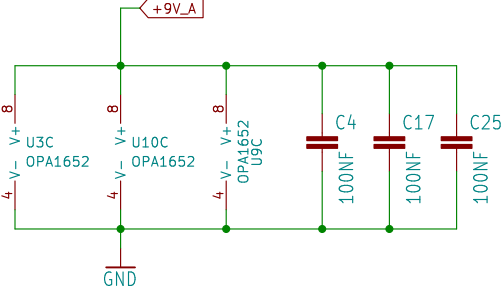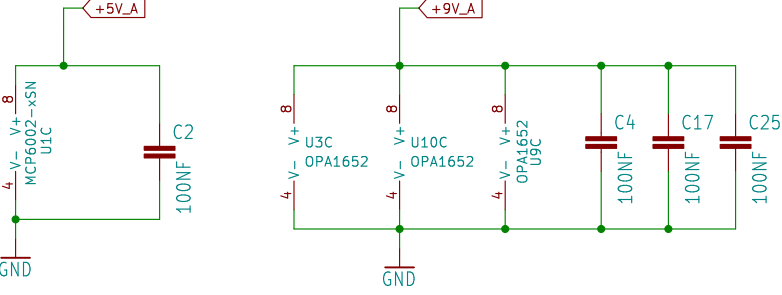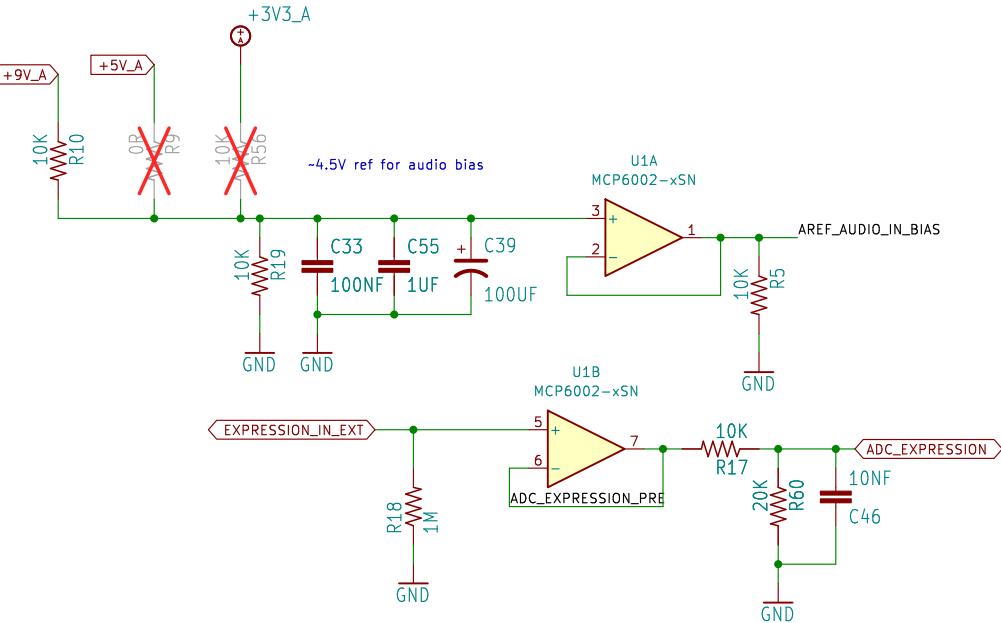

Power

