

Daisy



File: ES-Seed3-DevKit-Pedal-Rev1_1.kicad_sch

Peripherals



File: ES-Seed3-DevKit-Pedal-Rev1_2.kicad_sch

Audio IO



File: ES-Seed3-DevKit-Pedal-Rev1_3.kicad_sch



Power




File: ES-Seed3-DevKit-Pedal-Rev1_4.kicad_sch

UCB_IN_D	4		5	UCB_OTC_UC_D	J7	PWR_FLAG
----------	---	--	---	--------------	----	----------


Switches + Pots

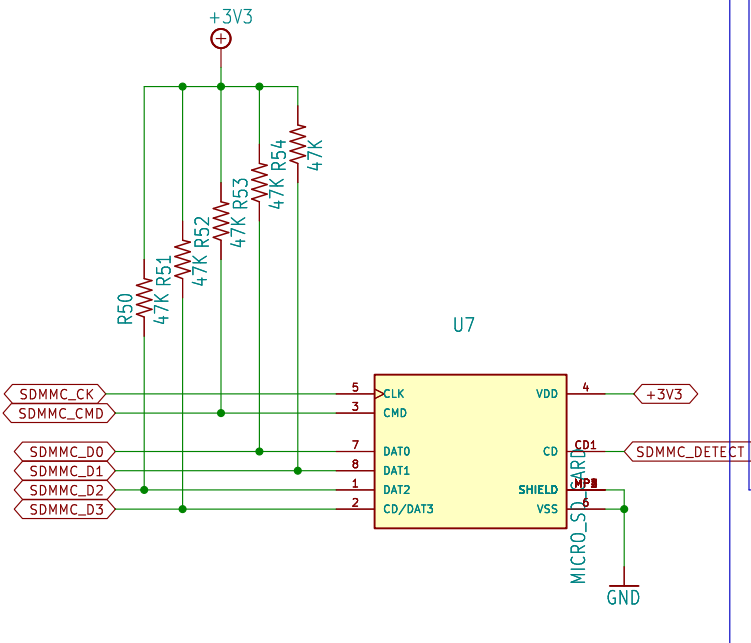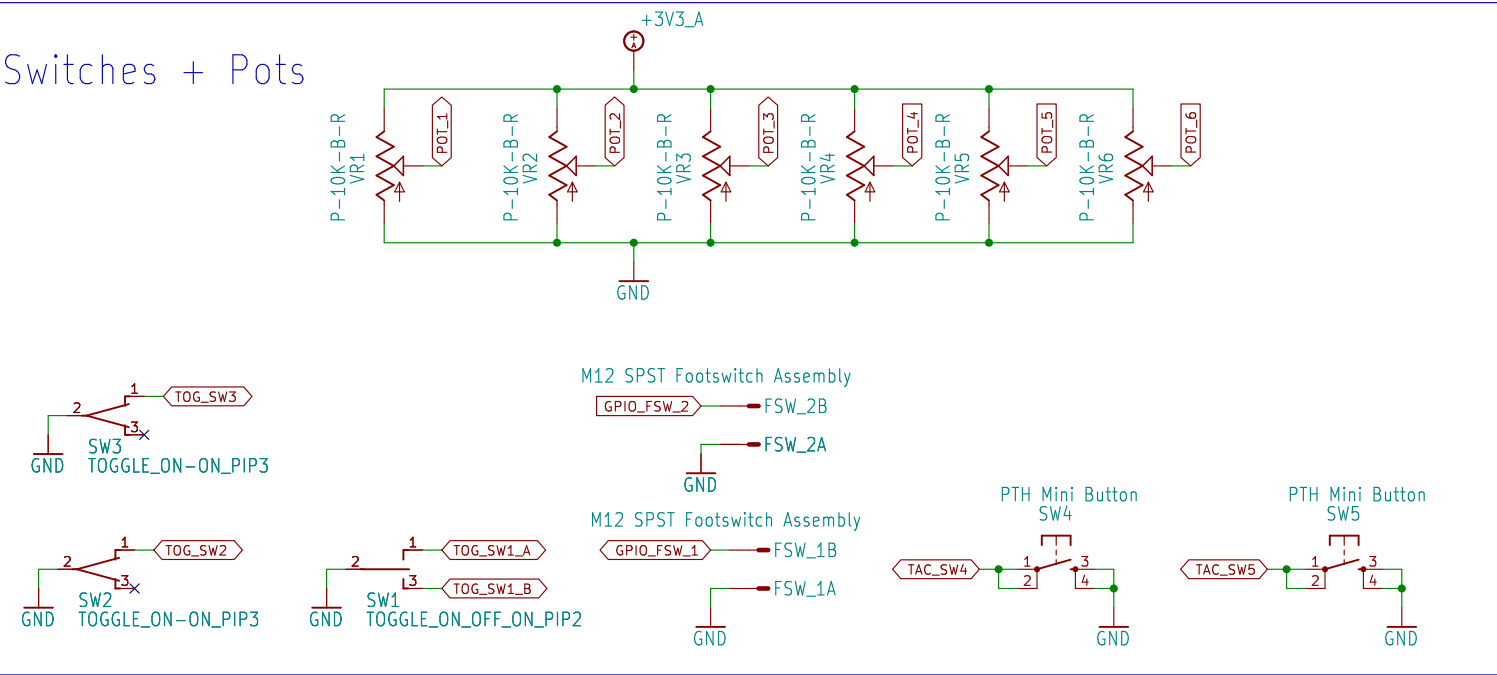

LEDs

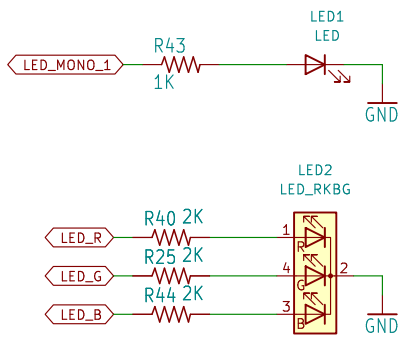

Jacks


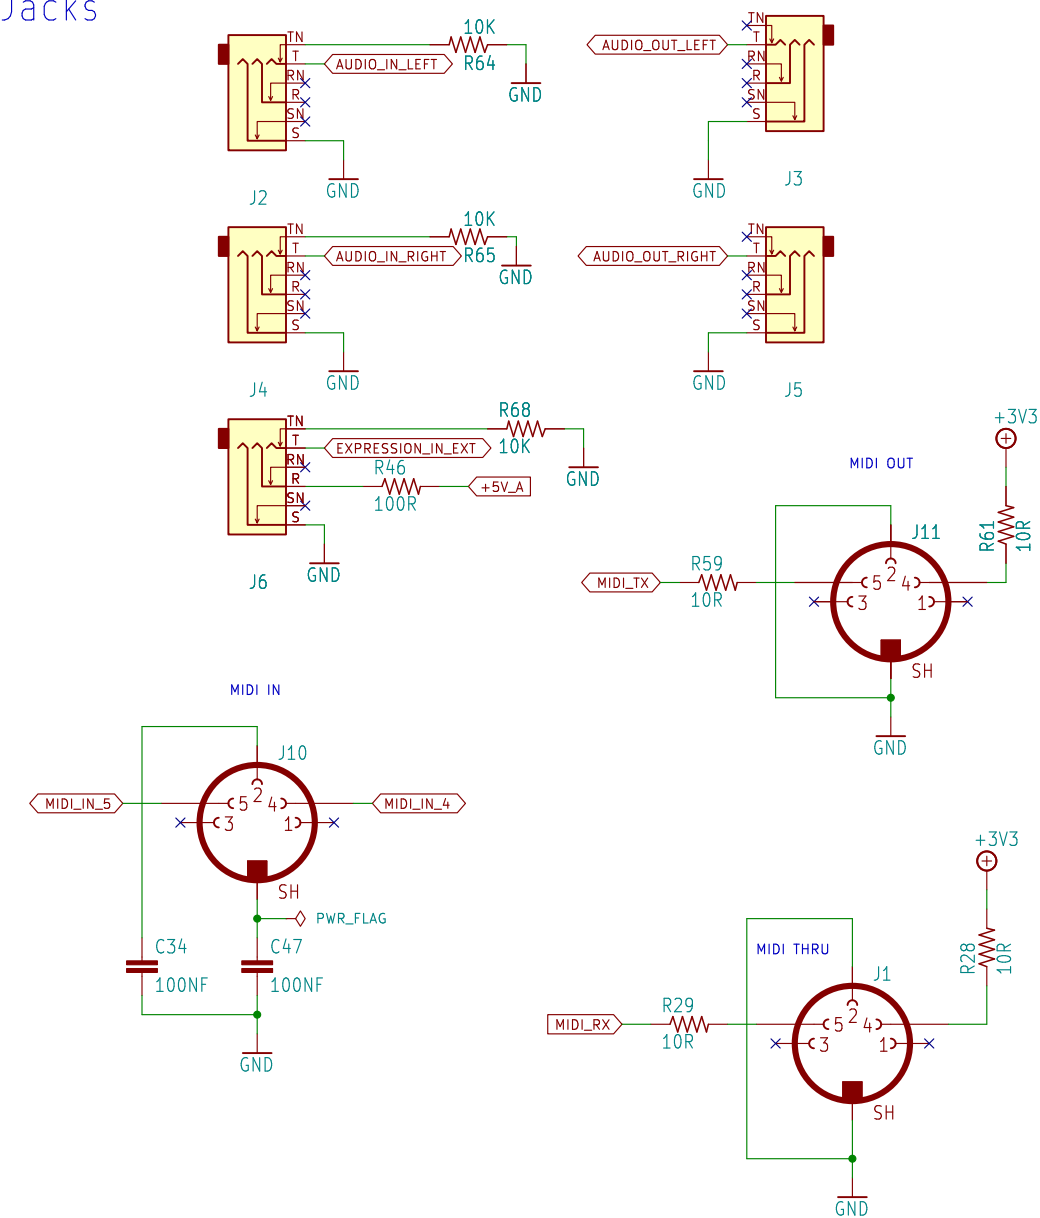


AK4558 In Range
 $0.8 \cdot AVDD$ Vpp = 2.64Vpp @ AVDD=3.3V



AK4558 Out Range
 $0.76 \cdot AVDD$ Vpp = 2.508Vpp @ AVDD=3.3V

prior stage RC filter could potentially be removed, and gain could happen here?
 $F_c = 58.946\text{kHz}$




This bias would ideally be $9V_A / 2$, but the 5V_A signal will be much more noise resilient

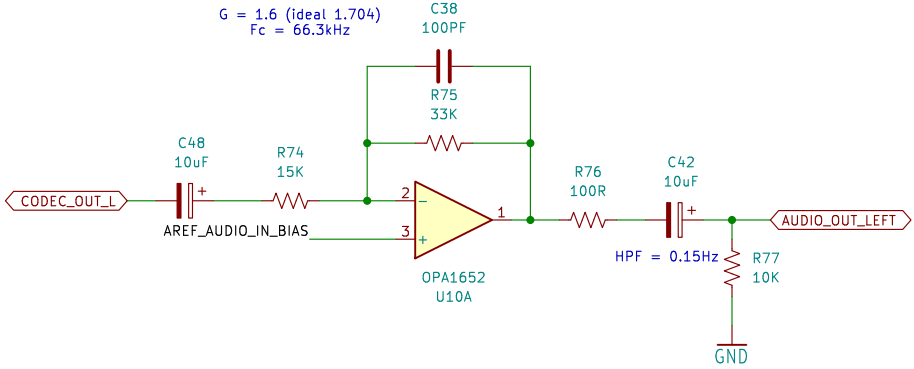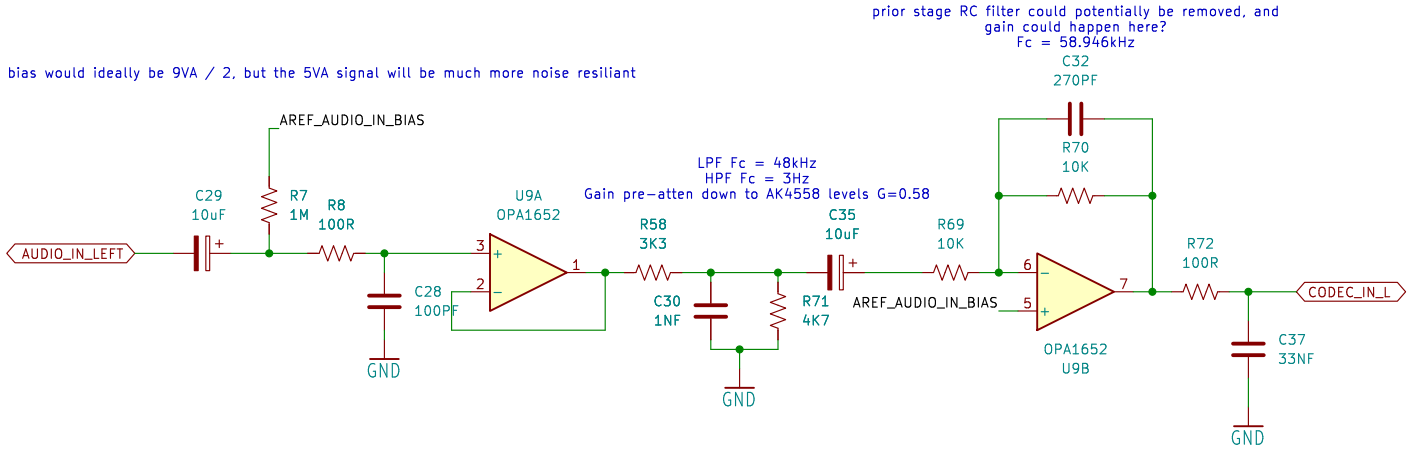

--- Identical circuits for right audio channel ---

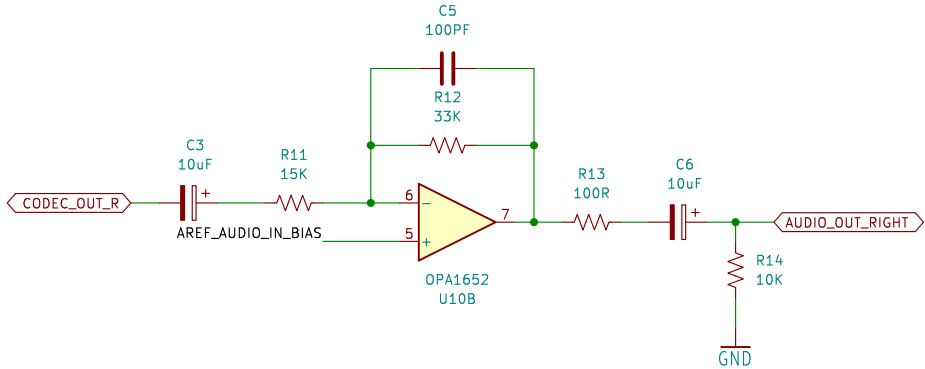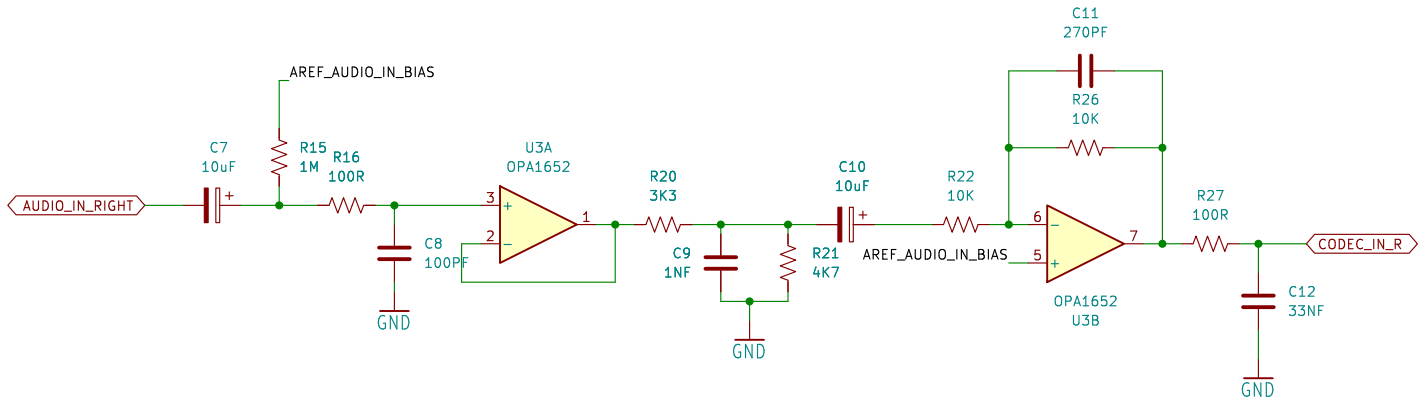

Expression In + VCOM Buffer

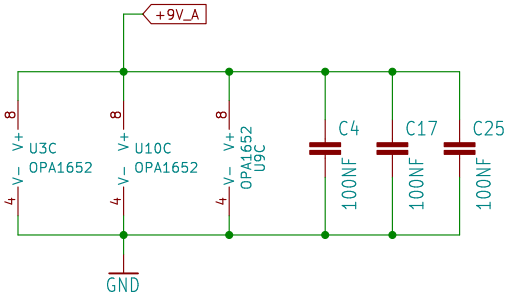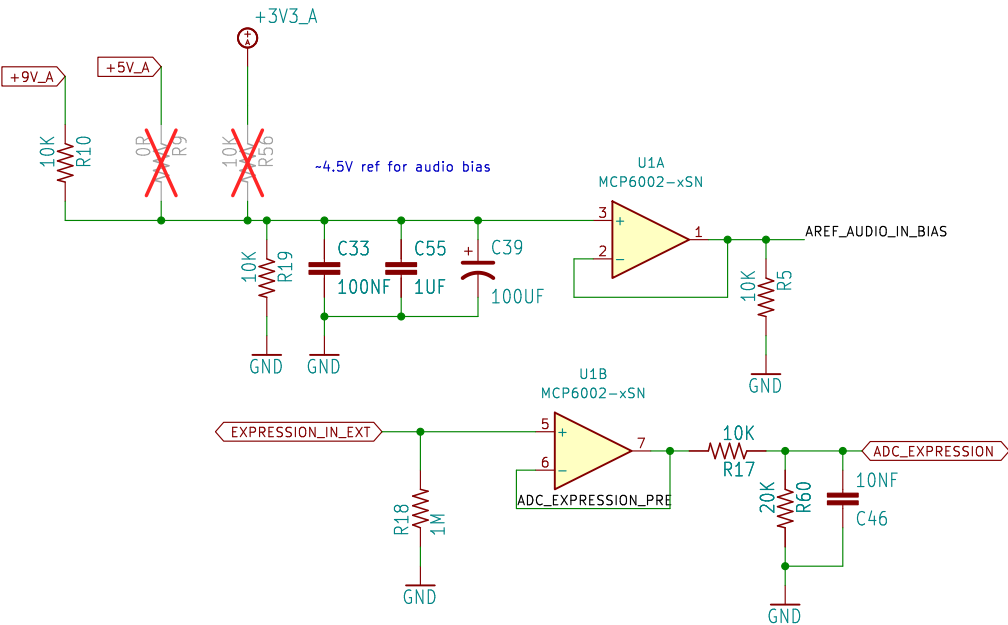

Power

