

Daisy



File: ES-Seed3-DevKit-Pedal-Rev1_1.kicad_sch

Peripherals



File: ES-Seed3-DevKit-Pedal-Rev1_2.kicad_sch

Audio IO




File: ES-Seed3-DevKit-Pedal-Rev1_3.kicad_sch

Power



File: ES-Seed3-DevKit-Pedal-Rev1_4.kicad_sch

Seed VIN RLC Filter

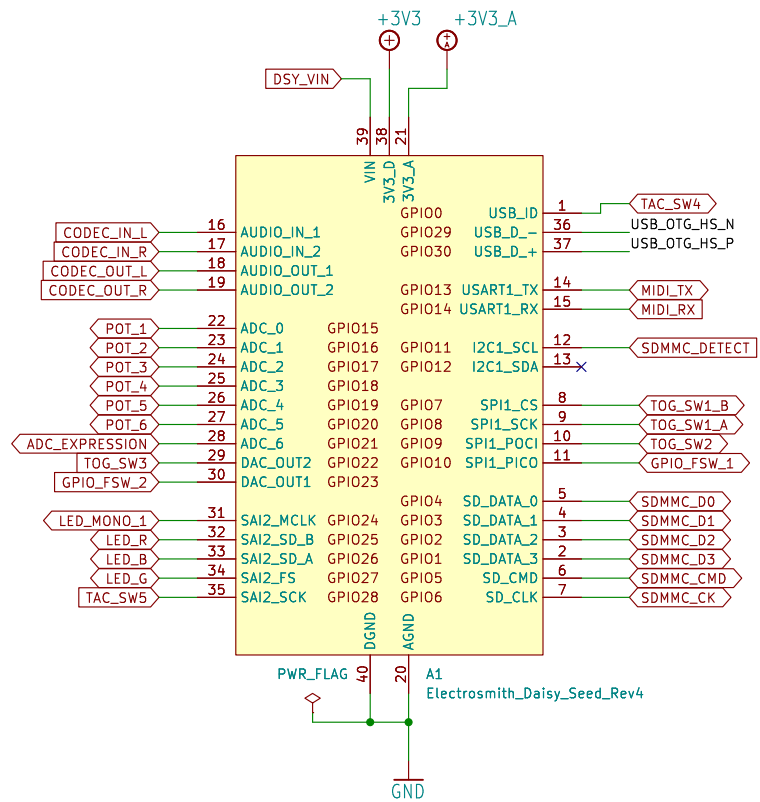


shnslly:qr--seed3--desktop--redirect--medium




- ✕ H1 MOUNT-PAD-ROUND3.5
- ✕ H2 MOUNT-PAD-ROUND3.5
- ✕ H3 MOUNT-PAD-ROUND3.5
- ✕ H4 MOUNT-PAD-ROUND3.5



USB C

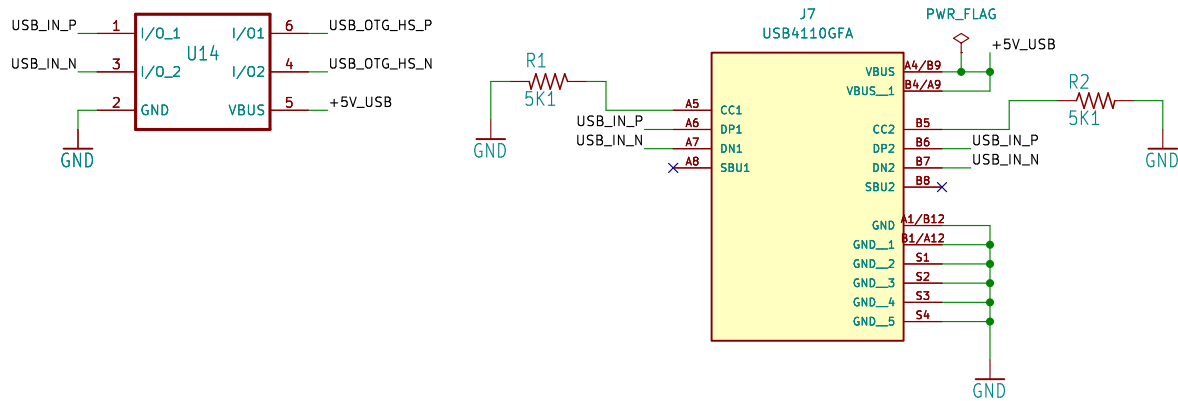


DIN MIDI In

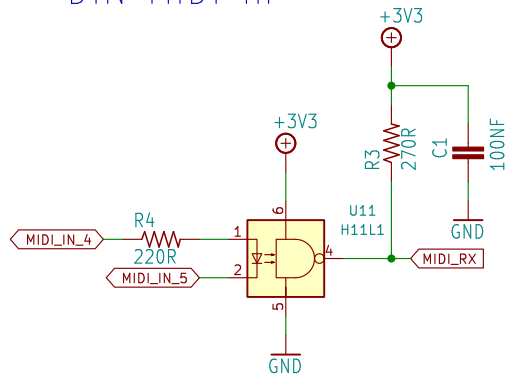


Switches + Pots

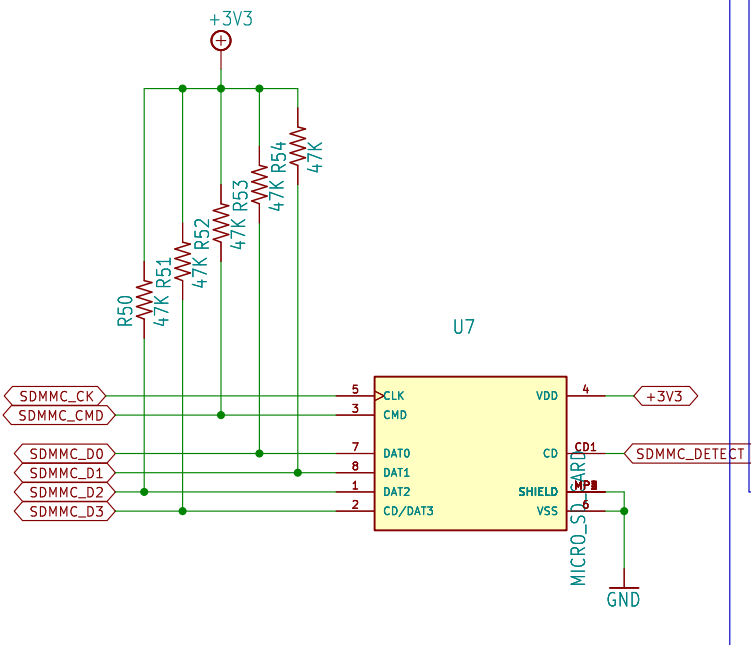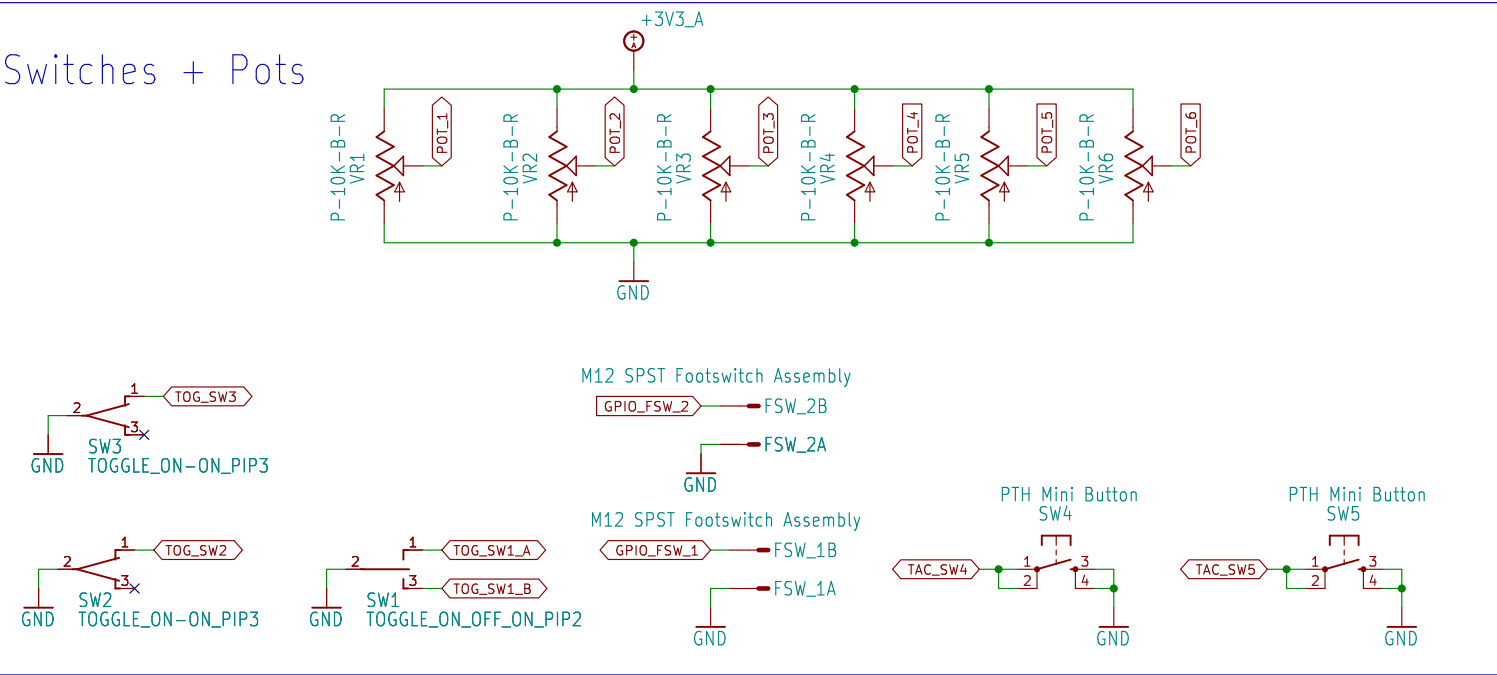

LEDs

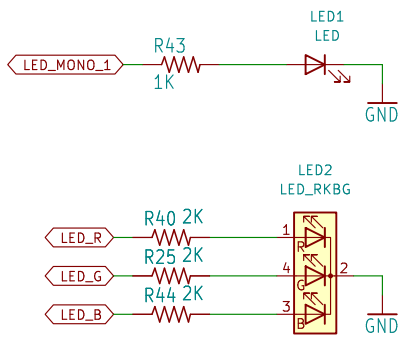

Jacks


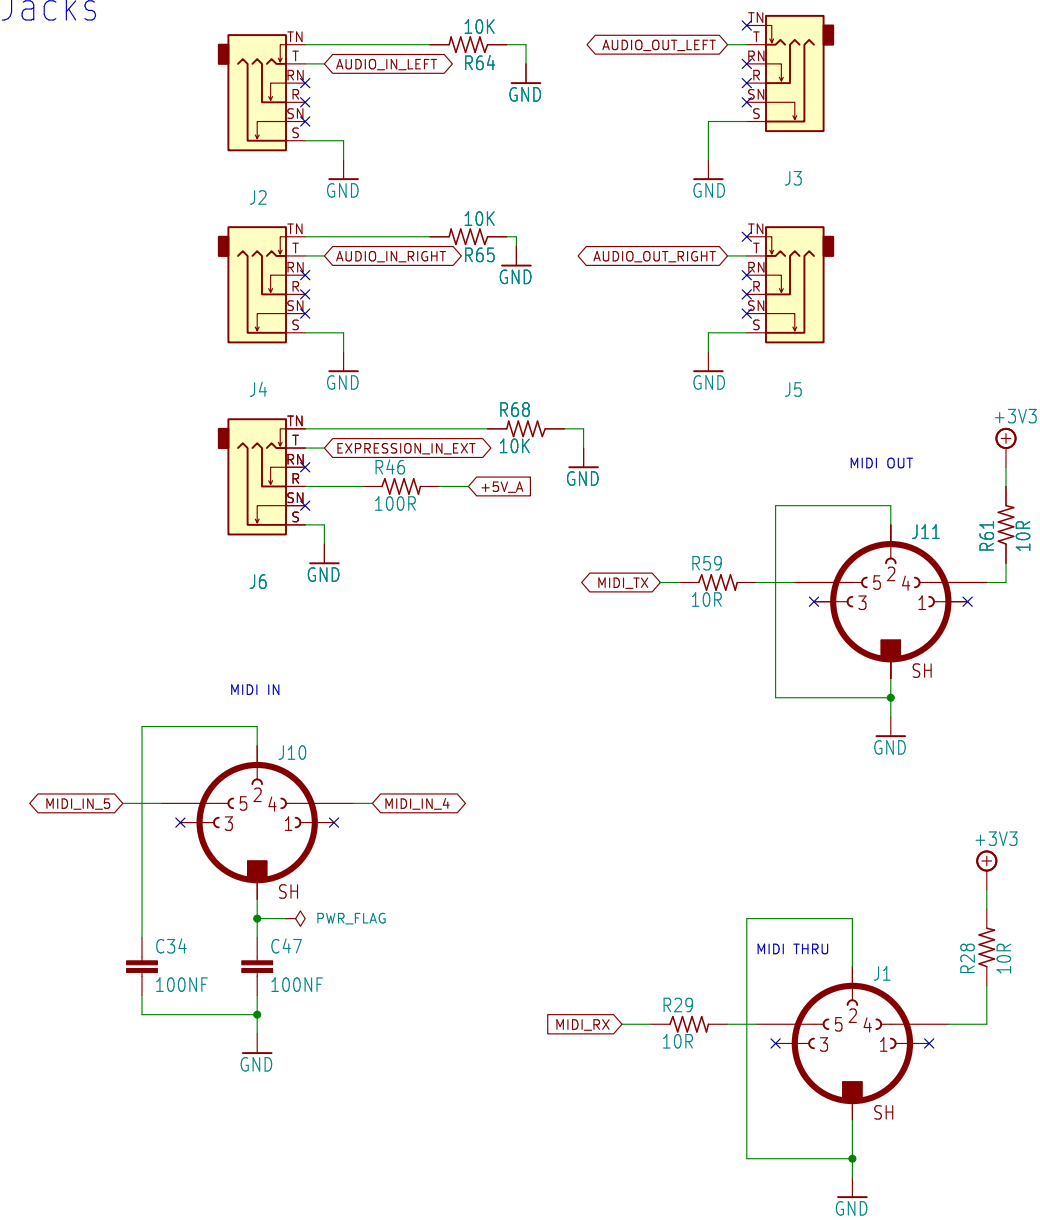


AK4558 In Range
 $0.8 \cdot AVDD$ Vpp = 2.64Vpp @ AVDD=3.3V



AK4558 Out Range
 $0.76 \cdot AVDD$ Vpp = 2.508Vpp @ AVDD=3.3V

prior stage RC filter could potentially be removed, and gain could happen here?
 $F_c = 58.946\text{kHz}$



This bias would ideally be $9V_A / 2$, but the 5VA signal will be much more noise resilient

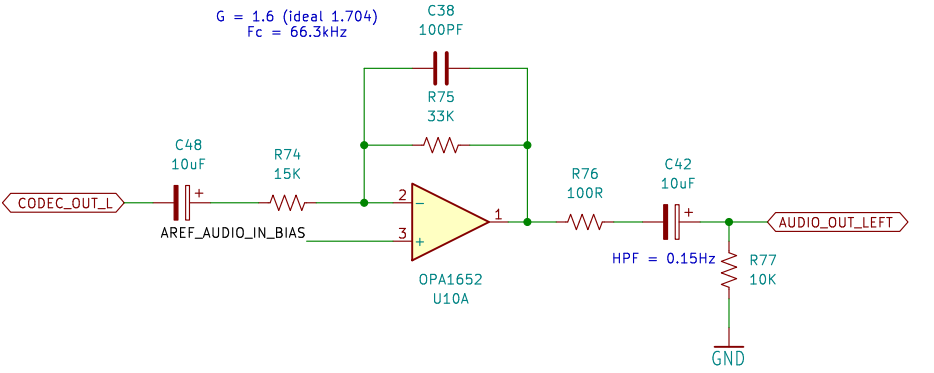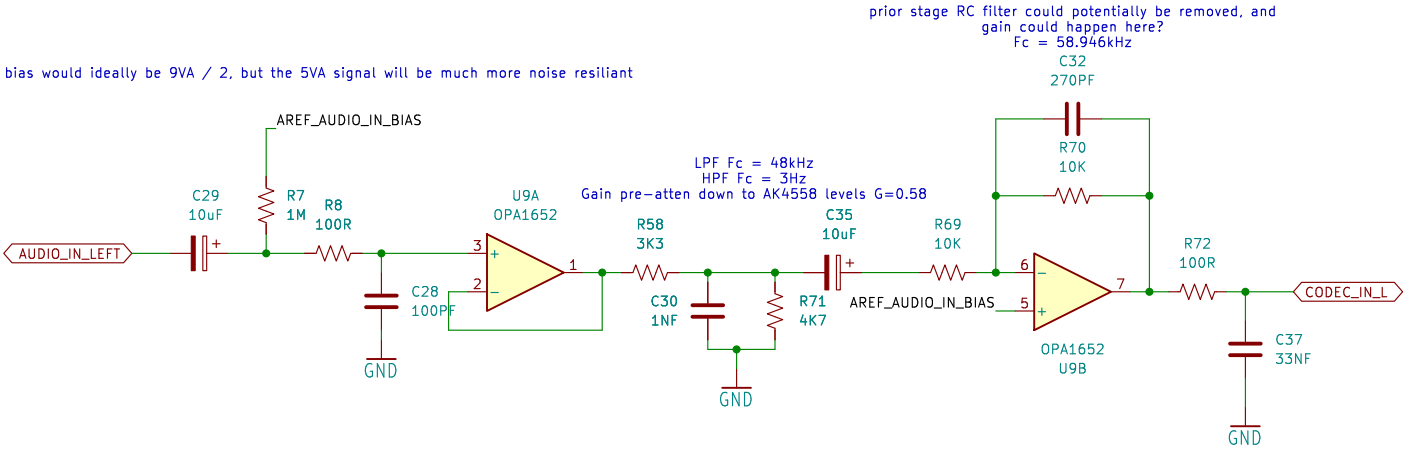

--- Identical circuits for right audio channel ---

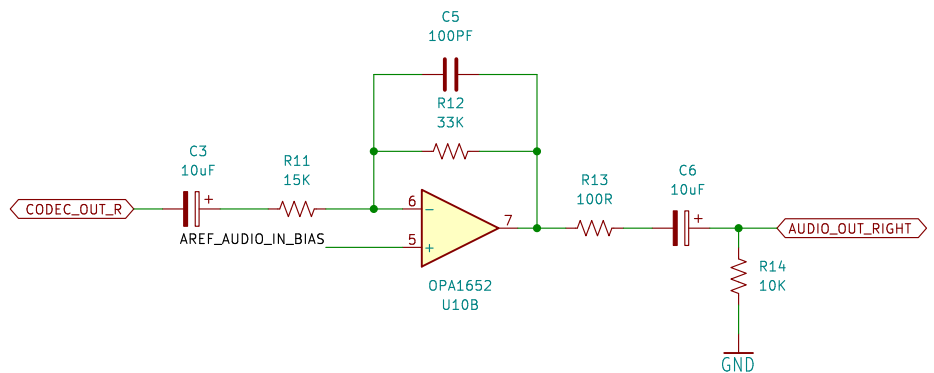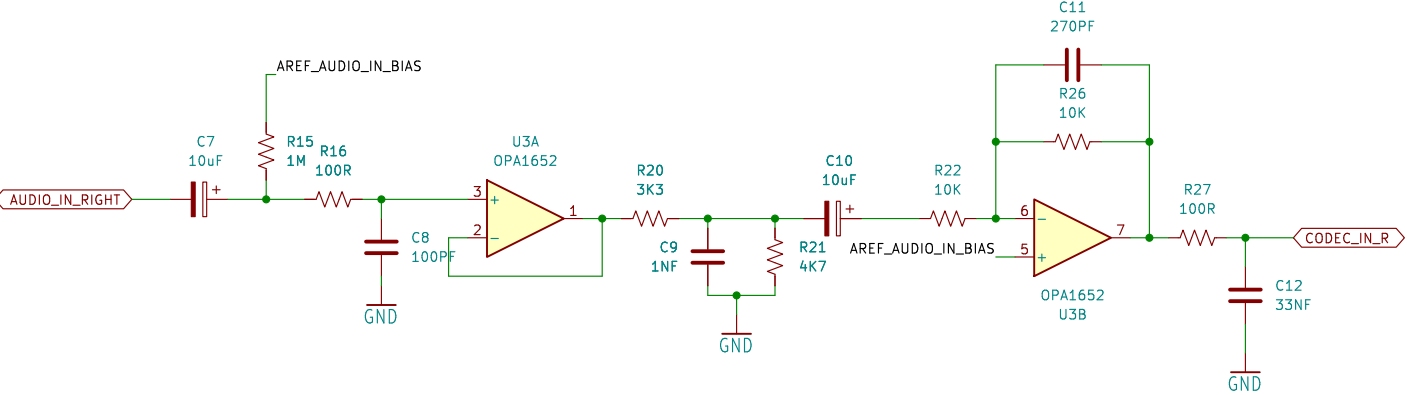

Expression In + VCOM Buffer

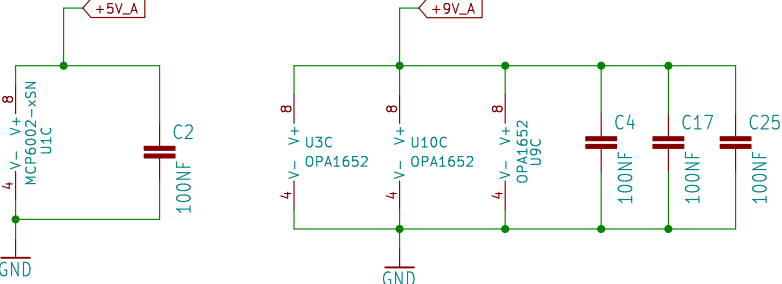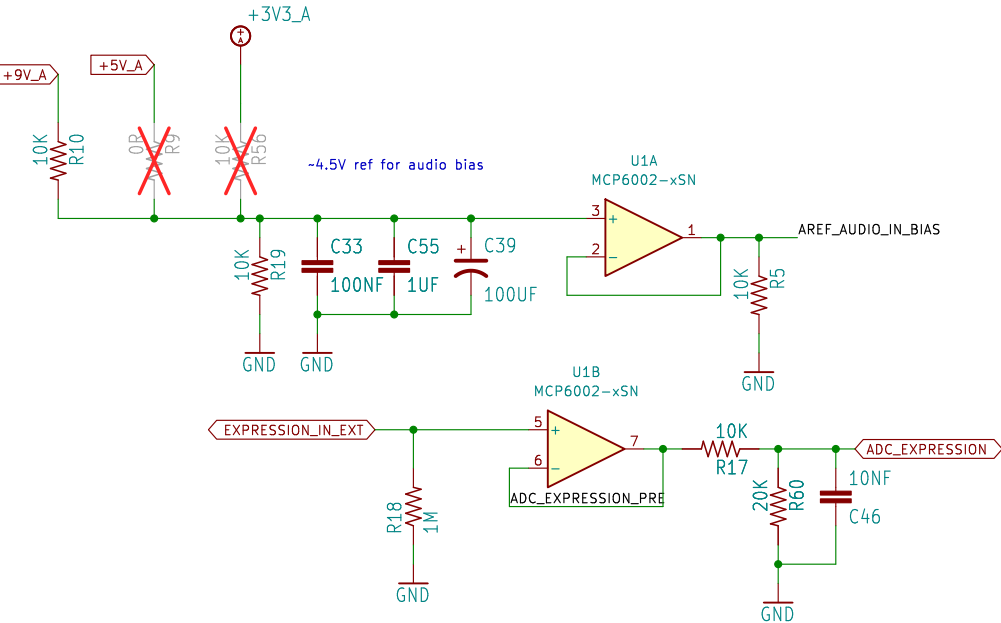

Power

